

Coordinates Ceiling 4

Designed by Michael Anastassiades, 2020

157W - 8830lm - 2700K - CRI> 95

Ceiling-mounted lighting system emitting diffused light. Composed of horizontal and vertical luminaires arranged in a grid. Elements made of extruded anodised aluminium with a platinum optical silicone diffuser housing an integrated LED strip. Invisible electrical and mechanical connection. Each configuration includes a ceiling rose with integrated electronics for push, 1–10 V or DALI dimming. Class III versions available for remote power supply.

Part of the Coordinates family by Michael Anastassiades, Coordinates Ceiling distils the system's illuminated grid into an architectural ceiling composition. Evolving from a commission for the historic Four Seasons restaurant in New York, Coordinates takes inspiration from the Cartesian grid, translating pure mathematical precision into light. Its modular, scalable system allows configurations ranging from minimal arrangements to complex installations. Elegant, imposing and expressive, it brings geometry to life within any space.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607001684
Mounting	Ceiling
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	157
Lumen Output (lm)	8830

Physical

Colour	Anodized Champagne
Length (mm)	1770
Net weight (kg)	8.25
Package volume (m3)	0.07
IP internal	20



Download

Mounting instructions [Download PDF](#)


Photometric Files

ULD [Download ZIP](#)

Technical Drawings

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)

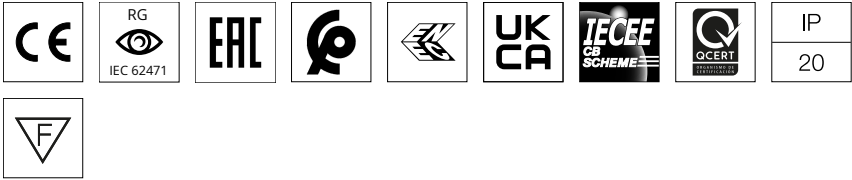

Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

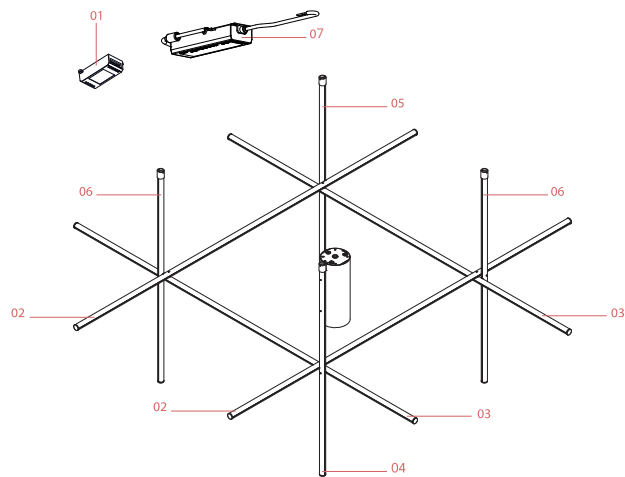

01.	Led dimmer kit	RF34197
02.	Coordinates Rod Assembly L1760 H-10 Anodized Champagne	RF30984
03.	Coordinates Rod Assembly L1760 H-11 Anodized Champagne	RF30985
04.	Coordinates Ceiling 4 Rod Assembly L920 CA-07 Anodized Champagne	RF30991
05.	Coordinates Ceiling 4 Rod Assembly L920 C-08 Anodized Champagne	RF30992
06.	Coordinates C4 - Rod Assembly L920 C-09 Anodized Champagne	RF30993
07.	48Vdc 180W Power supply	RF29209



RF34197

Led dimmer kit



RF30984

Coordinates Rod Assembly L1760
H-10 Anodized Champagne



RF30985

Coordinates Rod Assembly L1760
H-11 Anodized Champagne



RF30991

Coordinates Ceiling 4 Rod
Assembly L920 CA-07 Anodized
Champagne



RF30992

Coordinates Ceiling 4 Rod
Assembly L920 C-08 Anodized
Champagne



RF30993

Coordinates C4 - Rod Assembly
L920 C-09 Anodized Champagne



RF29209

48Vdc 180W Power supply