


Noctambule Suspension 1 Low Cylinder Bowl

Designed by Konstantin Grcic, 2019

36W - 1007lm - 2700K - CRI> 90

Suspension lamp emitting diffused light. Composed of transparent interconnected blown-glass cylinders with a conical or semi-spherical shaped diffuser. Features die-cast aluminium ring connector, hydroformed steel internal arm and injection-moulded optical opal silicone outer-ring diffusers. Ceiling rose houses the power supply unit, enabling dimming from 10–100% via 0–10V/1–10 V, PUSH or DALI control.

Designed by Konstantin Grcic, Noctambule takes its name from the French word for a ‘night owl’. By day, its transparent glass cylinders almost disappear into their surroundings. At night, LED rings at the intersections bring the lamp to life, creating luminous columns of light that can grow from three modules to towering heights. A masterful balance of restraint and drama, Noctambule is both system and sculpture, revealing its true character only when illuminated. Noctambule has received multiple design accolades.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607000540
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	36
Lumen Output (lm)	1007

Physical

Colour	Black
Length (mm)	250
Cord colour	Black
Cord length (mm)	4000
Canopy colour	Black
Canopy length/diameter (mm)	187
Canopy height (mm)	45
Net weight (kg)	11.15
Package volume (m3)	0.43
IP internal	20

Download


Mounting instructions	Download PDF
Mounting instructions	Download PDF
Mounting instructions	Download PDF

Photometric Files


LDT / IES	Download ZIP
-----------	--------------

Technical Drawings

3D	Download ZIP
Bim	Download ZIP

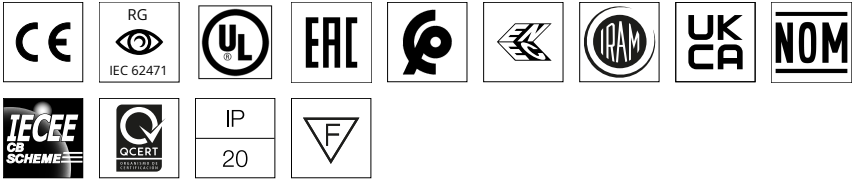

Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

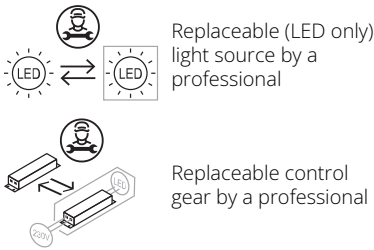

Spare Parts

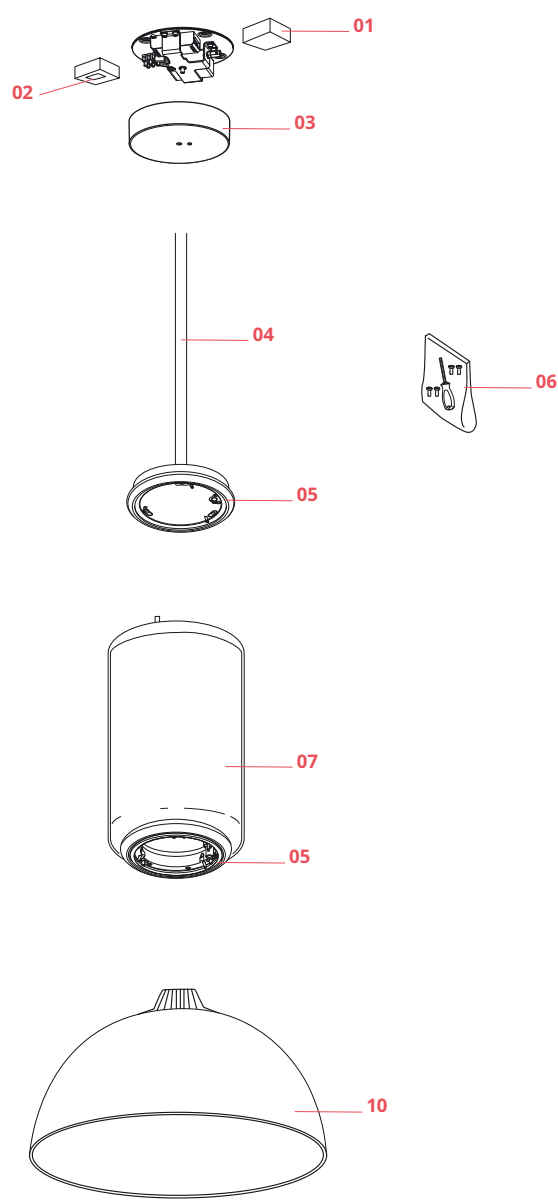

- 00. Push button and cables assembly for dimmer RF27318
- 01. Power supply kit for Arrangements small & Noctambule RF0410500
- 02. Led dimmer kit RF34197
- 03. Noctambule ceiling rose cover RF27422
- 04. Noctambule Suspension attack F0253030
- 05. Ring led diffuser RF27498
- 06. Fixing screws kit RF0254100
- 07. Noctambule Low Cylinder F0254000
- 10. Noctambule Bowl F0255000



RF27318
Push button and cables assembly
for dimmer



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF34197
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030
Noctambule Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000
Noctambule Low Cylinder



F0255000

Noctambule Bowl