

FLOS

■ F4640030 Black

OK


Designed by Konstantin Grcic, 2014

18W - 1551lm - 2700K



Adjustable luminaire featuring a glossy varnished, adjustable aluminium head and a body in injection-moulded PA66+30%FV with a varnished cover. The head rotates 360° and slides vertically along a steel cable (useful length 4000 mm) tensioned between ceiling and floor. Soft-touch switch integrated for on/off and dimming. Plug adapter and interchangeable plugs included.

Designed by Konstantin Grcic, OK reinterprets Achille Castiglioni's iconic Parentesi for the contemporary era. With the onset of new lighting technologies, a luminous disc replaces the humble light bulb that Parentesi celebrated so beautifully. The name combines the circle of its form with the first letter of Grcic's name. Paying homage to a master, OK unites technological innovation and timeless design in a piece that projects the spirit of Parentesi into the future.

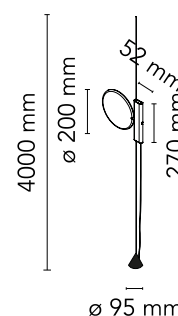

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

[Mounting instructions](#)  PDF

[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  LDT

Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP

Main specifications


EAN	8059607005064
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	18
Lumen Output (lm)	1551

Physical


Colour	Black
Length (mm)	200
Cord colour	Black
Cord length (mm)	4000
Canopy colour	Black
Canopy length/diameter (mm)	64
Canopy height (mm)	20
Net weight (kg)	3
Package height (mm)	140
Package width (mm)	340
Package length (mm)	390
Package volume (m3)	0.02
IP internal	20

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

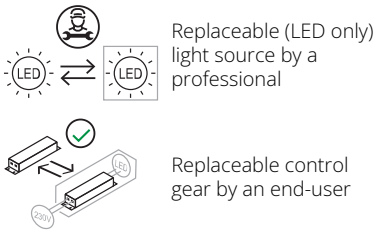

Schematic light drawing




Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

Spare Parts

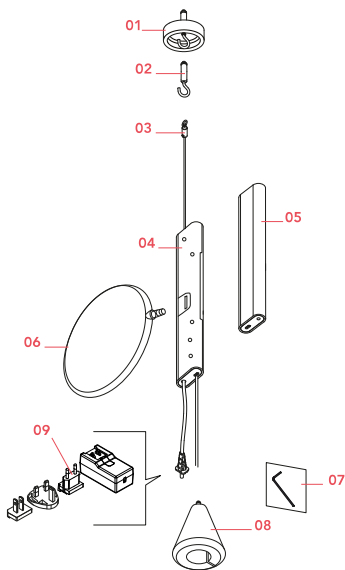

01.	Ok Black ceiling rose	RF23030
02.	Ok Anchor with hook	RF4640100
03.	Ok Steel cable 4mt.	RF4640200
03.	Ok Steel cable 6mt.	RF4640300
04.	Ok Internal lamp body assembly	RF4640400
05.	Ok Black extrusion	RF22996
06.	Ok Black led head assembly	RF28254
07.	Ok Hex Key 2mm for OK lamp	RF06850
08.	Ok Counterweight	RF23023
09.	Black plug assembly kit & 24V driver	RF6600230



RF23030

Ok Black ceiling rose



RF4640100

Ok Anchor with hook



RF4640200

Ok Steel cable 4mt.



RF4640300

Ok Steel cable 6mt.



RF4640400

Ok Internal lamp body assembly



RF22996

Ok Black extrusion



RF28254

Ok Black led head assembly



RF06850

Ok Hex Key 2mm for OK lamp



RF23023

Ok Counterweight



RF6600230

Black plug assembly kit & 24V driver