

Coordinates Module Suspension CLIII

Designed by Michael Anastassiades, 2020

180W - 10230lm - 2700K - CRI> 90

Suspension lighting system emitting diffused light. Composed of horizontal and vertical luminaires arranged in a grid. Elements made of extruded anodised aluminium with a platinum optical silicone diffuser housing an integrated LED strip. Invisible electrical and mechanical connection with 2.4 m cables. Each configuration includes a ceiling rose with integrated electronics for push, 1–10 V or DALI dimming.

Designed by Michael Anastassiades, Coordinates Suspension translates the collection's illuminated grid into a series of suspended compositions. Evolving from a commission for the historic Four Seasons restaurant in New York, Coordinates takes inspiration from the Cartesian grid, translating pure mathematical precision into light. Its modular, scalable system allows configurations ranging from minimal arrangements to complex installations. Elegant, imposing and expressive, it brings geometry to life within any space.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607031162
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	180
Lumen Output (lm)	10230

Physical

Colour	Anodized Champagne
Length (mm)	1770
Cord colour	Clear
Cord length (mm)	2400
Canopy colour	Anodized Champagne
Canopy length/diameter (mm)	61
Canopy height (mm)	29
Net weight (kg)	6
Package volume (m3)	0.05
IP internal	20

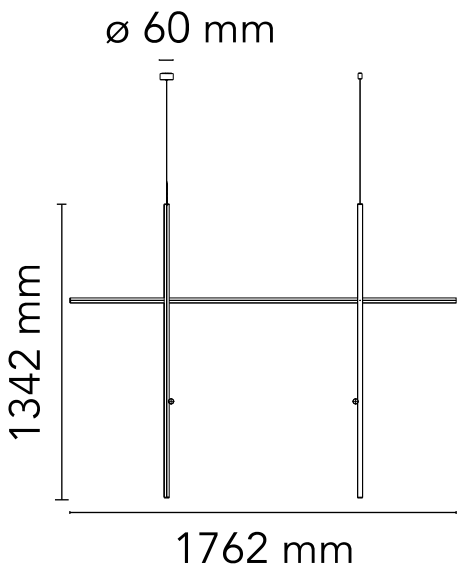

Download

Mounting instructions [Download PDF](#)


Photometric Files

ULD [Download ZIP](#)

Technical Drawings

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)

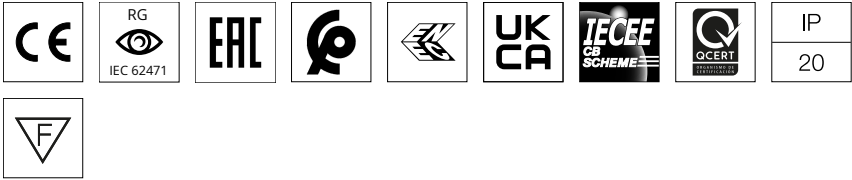

Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical

Insulation class	III
Main voltage (Vac)	48
Power supply	Remote excluded
Power supply type	Electronic 48V
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional

Accessories & Power Supply



OPTIONAL

RF26994

12-48V Led Dimmer




OPTIONAL

RF27617

48Vdc 240W Power supply

Spare Parts

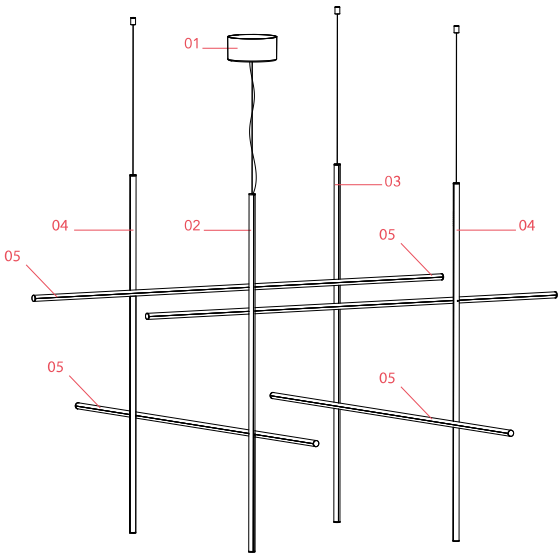

- | | | |
|-----|--|-----------|
| 01. | Assembly Rose Cover for
Coordinates S CLIII Anodized
Champagne | RF1874144 |
| 02. | Coordinates Module CL. III Rod
Assembly L1340 SA-32
Champagne | RF31461 |
| 03. | Coordinates S Rod Assembly
L1340 S-30 Anodized
Champagne | RF30989 |
| 04. | Coordinates S Rod Assembly
L1340 S-29 Anodized
Champagne | RF30988 |
| 05. | Coordinates S Rod Assembly
L1760 H-31 Anodized
Champagne | RF30990 |



RF1874144
Assembly Rose Cover for
Coordinates S CLIII Anodized
Champagne



RF31461
Coordinates Module CL. III Rod
Assembly L1340 SA-32
Champagne



RF30989
Coordinates S Rod Assembly
L1340 S-30 Anodized Champagne



RF30988
Coordinates S Rod Assembly
L1340 S-29 Anodized Champagne



RF30990
Coordinates S Rod Assembly
L1760 H-31 Anodized
Champagne