

FLOS

 F0090030 Black


Aim

Designed by Ronan & Erwan Bouroullec, 2013

16W - 895lm - 2700K

Suspension lamp emitting direct light. Features body in varnished aluminium with photo-etched optical polycarbonate shade and internal reflector in photo-etched ABS. Adjustable head allows flexible aiming of light. Supplied with 9-metre cable for suspension up to 3 metres from ceiling. Available in hardwired and plug-in versions. Dimmable via Flos-approved LED Triac dimmer. Multiple ceiling rose available to connect up to five Aim units.

Designed by Ronan and Erwan Bouroullec in 2010, Aim reduces lighting to its essentials: a cable and a source of light. The freely adjustable body creates a dynamic play of lines and positions like a tangle of vines. Inspired by nature, the designers imagined Aim as a lamp that grows and adapts, offering endless possibilities in both single and clustered configurations. Its radical form and flexibility reimagine the concept of centralised lighting, allowing light to be aimed exactly where needed.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

[Mounting instructions](#)  PDF

[Dimmers or chargers compatible](#)  PDF

Photometric Files

[LDT / IES](#)  LDT

Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP

[Bim](#)  ZIP

Main specifications

EAN	8059607013281
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	16
Lumen Output (lm)	895

Physical


Colour	Black
Length (mm)	243
Cord colour	Black
Cord length (mm)	9000
Canopy colour	Black
Canopy length/diameter (mm)	80
Canopy height (mm)	23
Net weight (kg)	3
Package height (mm)	375
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply



OPTIONAL

F0093030

Aim Multiple Canopy




OPTIONAL

RF22227

Aim Dimmer

Spare Parts

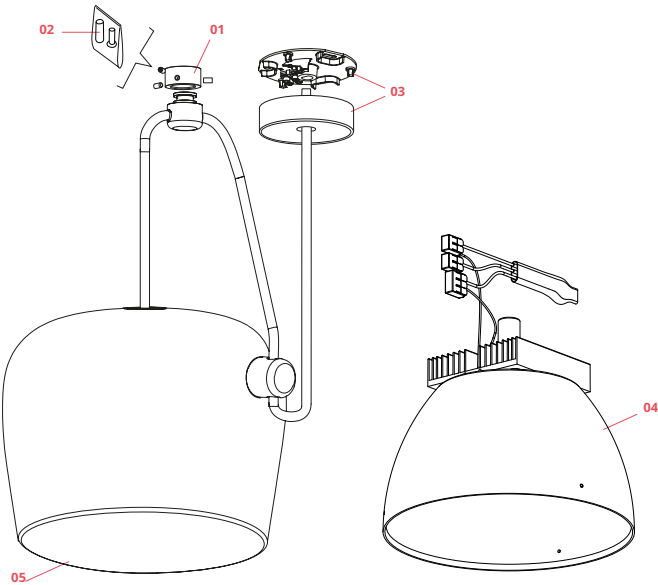

- | | | |
|-----|---|-----------|
| 01. | Aim/Aim Small Black ceiling attachment assembly | RF0090130 |
| 02. | Aim/Aim Small Kit of quantity 3 m4 screws | RF06750 |
| 03. | Aim Black ceiling rose assembly | RF0090230 |
| 04. | Aim Heatsink, 2700K Led Module & Reflector Assembly | RF0090700 |
| 05. | Aim opal diffuser | RF0090600 |



RF0090130

Aim/Aim Small Black ceiling attachment assembly



RF06750

Aim/Aim Small Kit of quantity 3 m4 screws



RF0090230

Aim Black ceiling rose assembly



RF0090700

Aim Heatsink, 2700K Led Module & Reflector Assembly



RF0090600

Aim opal diffuser