

Sticks Connectable

Design by Arik Levy

VIBIA



Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

Application:
Lighting Toolkit

Installation type:
Depends on selected installation accessory (see page 5).

Diffuser:
Polycarbonate.

Materials:
Sticks: Aluminum.

Finish:
● 11 Black (NCS S 8500-N)

Driver and Dimming:
Depends on selected installation accessory (see page 5).

Personalization options available

- LED 3000 K.
 - Extra cable length for Wall - Hanging and Hanging - Hanging.
- Min. quantity, upcharge and extra lead time apply.

Installation and assembly:

Please, see the installation manual.

www.vibia.com ► Professional area

and together with the product you'll receive a personalized installation guide with all the details of your composition and guidance for its correct and easy installation.



Light distribution:

General lighting: Lamp for general lighting that equally distributes the light in all directions.



Certificates:

LED <III> IP20 CE Dimmer

Sticks Connectable

Design by Arik Levy

VIBIA

Connecting space application

Custom configurations include ceiling-to-ceiling, wall-to-wall, floor-to-wall, wall-to-ceiling, or suspended from the ceiling into open space. Through their physical form and the light they cast, they create and disrupt architectural planes.

Connectable

The Sticks collection has three sizes: 1.5 m, 2 m, or 3 m, and they can be connected one to each other to a total maximum length of 6.5 meters per electrical connection.


1.5 m

2 m

3 m



Sticks are connected one to each other with a 15 cm length cord.



Each stick rotates on its own axis, allowing light to be directed precisely where needed.



Sticks Connectable

Design by Arik Levy

VIBIA

Wall-Wall / Ceiling-Ceiling




Wall-Wall (corner) / Wall-Ceiling




Wall-Hanging



Hanging-Hanging

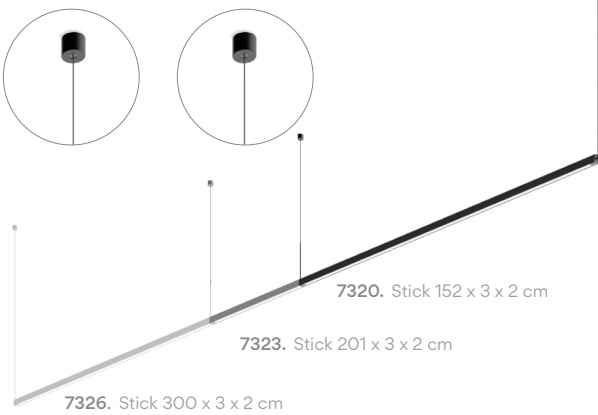

Hanging

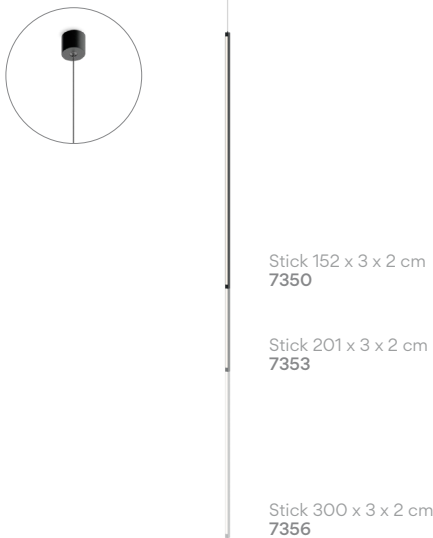

Floor-Wall



Sticks Connectable

Design by Arik Levy

VIBIA



Elements to be configured

Wall-Wall / Ceiling-Ceiling
Wall-Wall (corner) / Wall-Ceiling
Wall-Hanging
Hanging-Hanging
Hanging-Ceiling
Hanging

Sticks 1,5 m. 7300 7310 7320 7330 7350

1 x LED STRIP 26,4 W 24V. 
/1 M 2700 K. CRI >90. 3260 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 3561 lm. 134 lm/W.

Net Weight 0,9 Kg.

Sticks 2 m. 7303 7313 7323 7333 7353

1 x LED STRIP 35,2 W 24V. 
/1 M 2700 K. CRI >90. 4346 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 4748 lm. 134 lm/W.

Net Weight 1,2 Kg.

Sticks 3 m. 7306 7316 7326 7336 7356

1 x LED STRIP 52,8 W 24V. 
/1 M 2700 K. CRI >90. 6519 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 7122 lm. 134 lm/W.

Net Weight 1,8 Kg.

Sticks: Aluminum.
Diffuser: Polycarbonate.

Driver and Dimming depends on selected installation accessory (see page 5).

Suspension cables up to 3m. for
Wall - Hanging and Hanging-Hanging.

Personalization options available

- LED 3000 K.
- Extra cable length for Wall - Hanging and Hanging - Hanging.
- Min. quantity, upcharge and extra lead time apply.



Horizontal Hanging version with
a UGR index <19 available.
Request more information.

Floor-Wall

Sticks 1,5 m. 7340

1 x LED STRIP 26,4 W 24V. 
/1 M 2700 K. CRI >90. 3260 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 3561 lm. 134 lm/W.

Net Weight 1,5 Kg.

Sticks 2 m. 7343

1 x LED STRIP 35,2 W 24V. 
/1 M 2700 K. CRI >90. 4346 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 4748 lm. 134 lm/W.

Net Weight 1,8 Kg.

Sticks 3 m. 7346

1 x LED STRIP 52,8 W 24V. 
/1 M 2700 K. CRI >90. 6519 lm. 123 lm/W.
/4 M 4000 K. CRI >90. 7122 lm. 134 lm/W.

Net Weight 2,4 Kg

Sticks: Aluminum.
Diffuser: Polycarbonate.

Driver and Dimming depends on selected installation accessory (see page 5).

Personalization options available

- LED 3000 K.
- Min. quantity, upcharge and extra lead time apply.


   



Installation types



Floor base & plug







Surface canopy



Built-in disc S



Remote driver Built-in Micro



Floor base & plug ACST000001 ACST000002

Driver Constant Voltage 24V.
200~240V. 50/60Hz.
Dimming: Push.

Materials
Body: Steel.

Packaging
1 Box /
0,16 x 0,16 x 0,4 m.
Vol. 0,01 m³.
Gross weight 8,5 Kg.
Net weight 7 Kg.

11 Black
(NCS S 8500-N)

IP20 CE Dimmer

Surface canopy ACST000003 ACST000004

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.

Personalization options available
- Dimming: DALI, Casambi.
Min. quantity, upcharge and extra
lead time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.

Packaging
1 Box /
0,50 x 0,25 x 0,25 m.
Vol. 0,03 m³.
Gross weight 2,9 Kg.
Net weight 2,5 Kg.

11 Black
(NCS S 8500-N)

IP20 CE Dimmer Multi-volt

Built-in disc S ACST000005 ACST000006

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.

Personalization options available
- Dimming: DALI, Casambi.
Min. quantity, upcharge and extra
lead time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.

Packaging
1 Box /
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)

IP20 CE Dimmer Multi-volt

Remote driver Built-in Micro ACST000007 ACST000008

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.

Personalization options available
- Dimming: DALI, Casambi.
Min. quantity, upcharge and extra
lead time apply.
To be installed on ceiling or wall.

Materials
Body: Aluminum.

Packaging
1 Box /
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)

IP20 CE Dimmer Multi-volt

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6
08850 Gavà
Barcelona, Spain

International
T+34 934 796 971
Spain / Portugal
T+34 934 796 970
customer.service@vibia.com
vibia.com