



Model Sheet

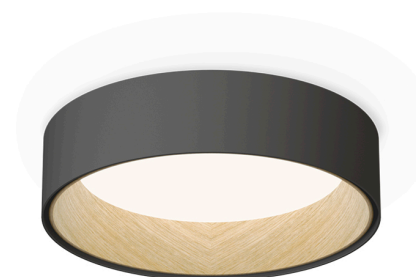

Finish

- 93 White
RAL 9016
- 58 Cream
RAL 7044
- 18 Graphite
ADAPTA RF 9913 WX

LED temperature color

2700 K / 3500 K /
Tunable White

Dimming

Casambi / Push; 1-10V; DALI-2

Installation type

Surface Canopy

Materials

Shade: Wood

Light source

1 x LED PLATE 26W 500mA




LED

CRI>90 2206 lm 98
2700 K / 3500 K / Tunable
White

Driver

Constant Current 500 110~240
V V 50~60 Hz HZ



Application

Ceiling Lamps


Packaging

1 Box
0.558 m x 0.558 m x 0.255 m
Gross weight 7
Net weight 6
Vol. 0.0793



Lighting effect

General

First layer of basic, general illumination



Photometric Data



Efficiency	64.48 lm/W
Coordinate System	CG
Total Flux	1666.07 lm
Maximum Value	673.81 cd

Other Applications

