


Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.



Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Functionality & Accessories	Page 3
5. Photometric data and technical information	Page 3
6. Installation	Page 4
7. Recommended use & Installation height	Page 4
8. Ordering codes	Page 5
9. Certifications & standards	Page 10
10. Maintenance & Cleaning	Page 10

Versions



Single
Page 5-6



Multiple
Page 7-9

Volta

suspension lamp

1. Product overview

Suspension lamp with cylindrical aluminium head and acrylic (PMMA) lens diffuser.
Optional embedded aluminium optic lens with a 20° beam angle.
Height adjustable, with the possibility to create different compositions.
Recessed canopy option sits flush against the ceiling or wall and requires a Ø45mm cut-out and a remote driver.



2. Finishes and Materials



Body & Head: 26 Black
87 Bronze
26 Black & 61 Satin Gold

Canopy: 26 Black
87 Bronze

PVC extra-thin electrical cable:
Black on all finishes except for white body (white cable).

3. Light Source & Dimming

Lamping per head (Surface Canopy)

LED 6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 100V - 240V
2700K / Typ* 725 lumens
3000K / Typ* 763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

Dimming options:

Standard: NON DIMMABLE
Optional: TRIAC, DALI, CASAMBI

Optional optic: embedded aluminium optic 20°

Lamping per head (Recessed Canopy)

LED 6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 725 lumens
3000K / Typ* 763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

Dimming options:

Standard: TRIAC
Optional: DALI, CASAMBI

Optional optic: embedded aluminium optic 20°

Volta

suspension lamp


4. Functionality & Accessories

Standard configuration includes a 85° recessed nylon optic designed to improve visual comfort and reduce glare. It provides soft, uniform illumination with minimal visual impact.

A 60° methacrylate optic is supplied in the box, allowing the user to choose the preferred lighting effect. This option creates a subtle, decorative line of light visible from the side.

Optional architectural optic conceals the LED source within a 20° conical aluminium lens. It projects light exclusively downward (no lateral emission), offering precise control.

Three possible optic lenses

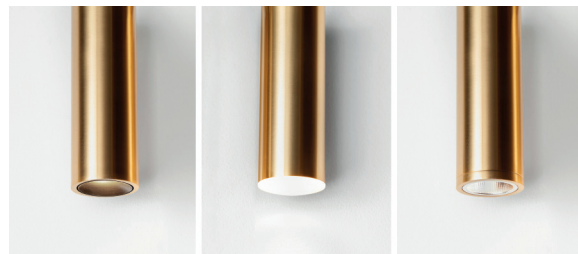

Nylon optic
85° beam angle
*included & installed

Methacrylate optic
60° beam angle
*included, not installed


Aluminium optic
20° beam angle
*not included, accessory

5. Photometric Data and Technical Information

Photometric data corresponds to each individual lamp. 2D, 3D, and BIM files also available in the download area. Access to all technical files directly here.


Nylon optic 85°

H[m]	D[m]	Max lux	Med lux	Alpha=42.5°+42.5°	G=0.0 Max no a G
1.00	1.84	302	128		
2.00	3.67	75	32		
3.00	5.51	34	14		
4.00	7.34	19	8		
5.00	9.18	12	5		

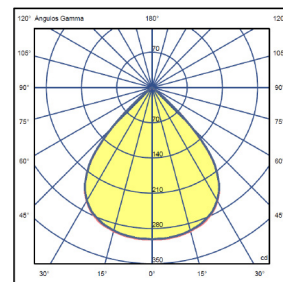


Methacrylate optic 60°

H[m]	D[m]	Max lux	Med lux	Alpha=28.8°+28.8°	G=0.0
1.00	1.10	430	230		
2.00	2.20	108	57		
3.00	3.30	48	26		
4.00	4.41	27	14		
5.00	5.51	17	9		

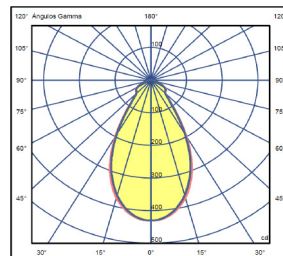

Aluminium optic 20°

H[m]	D[m]	Max lux	Med lux	Alpha=10.1°+10.1°	G=0.0
1.00	0.36	2047	1259		
2.00	0.71	512	315		
3.00	1.07	227	140		
4.00	1.43	128	79		
5.00	1.79	82	50		



Volta

suspension lamp

6. Installation

Single canopy

Surface



Recessed with remote driver



Ø 45 mm drill in
dropped ceiling

Clusters


Linear




7. Recommended use & Installation height

Suitable for general lighting, as well as for direct illumination above dining tables, countertops, bars, or desks. We **recommend positioning** the light source approximately **85 cm above the surface**. For more accurate information, refer to the photometric report.

Standard Acrylic Lens

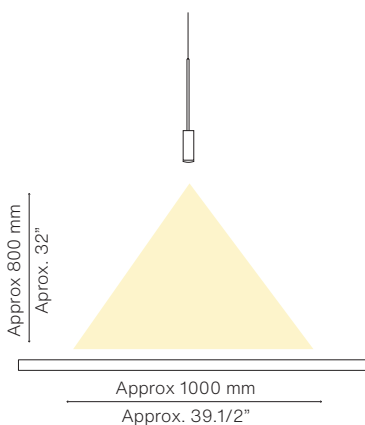

Embedded Aluminium Lens

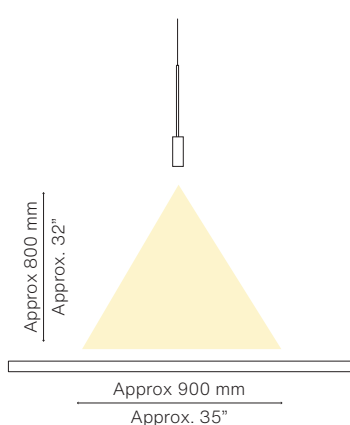

8. Ordering Codes

Lamping 3534S

LED 6,2W

(Ang. 85° embedded nylon lens / >90 CRI / 350mA)

100V - 240V

2700K / Typ* 725 lumens

3000K / Typ* 763 lumens

*Integrated LED module (included)

*Alternative 60°exposed acrylic lens (included)

DIM: NON DIMMABLE

(Optional: TRIAC, DALI, CASAMBI)

Optional optic lens: embedded aluminium optic lens 20°

Canopy: Single Surface

Finishes

Body & Head:

26 Black & 61 Satin Gold

26 Black

87 Bronze


Canopy:

26 Black

87 Bronze

Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
max 3000 mm max 118.1/8" Ø116 mm Ø4.5/8" 27 mm 1.1/8" Ø35 mm Ø1.3/8" 100 mm 3.7/8" 280 mm 11"	Black	Black / Black	VOL_3534S_262626W	VOL_3534S_262626M
	White	Black / Black	VOL_3534S_742626W	VOL_3534S_742626M
	Black	Black / Satin Gold	VOL_3534S_262661W	VOL_3534S_262661M
	White	Black / Satin Gold	VOL_3534S_742661W	VOL_3534S_742661M
	Bronze	Bronze / Bronze	VOL_3534S_878787W	VOL_3534S_878787M

Lens Ordering Codes:	Black	1 unit of 123530263
One 30° embedded lens per head	Satin Gold	1 unit of 123530613
	Bronze	1 unit of 123530873



8. Ordering Codes

Lamping 3534R

LED 6,2W

(Ang. 85° embedded nylon lens / >90 CRI / 350mA)

230V

2700K / Typ* 725 lumens

3000K / Typ* 763 lumens

*Integrated LED module (included)

*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic lens: embedded aluminium optic lens 20°

Canopy: Single Recessed

Finishes

Body & Head:

26 Black & 61 Satin Gold

26 Black

87 Bronze

Canopy:

26 Black

87 Bronze




Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
VOL_3534R 	Black	Black / Black	VOL_3534R_262626W	VOL_3534R_262626M
	White	Black / Black	VOL_3534R_742626W	VOL_3534R_742626M
	Black	Black / Satin Gold	VOL_3534R_262661W	VOL_3534R_262661M
	White	Black / Satin Gold	VOL_3534R_742661W	VOL_3534R_742661M
	Bronze	Bronze / Bronze	VOL_3534R_878787W	VOL_3534R_878787M

Lens Ordering Codes:

One 30° embedded lens per head

Black	1 unit of 123530263
Satin Gold	1 unit of 123530613
Bronze	1 unit of 123530873



8. Ordering Codes

Lamping L73S3S

LED 3x6,2W

(Ang. 85° embedded nylon lens />90 CRI / 350mA)

230V

2700K / Typ* 3x725 lumens

3000K / Typ* 3x763 lumens

*Integrated LED module (included)

*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic lens: embedded aluminium optic lens 20°

Canopy: Multiple Surface

Finishes

Body & Head:

26 Black & 61 Satin Gold


26 Black

87 Bronze

Canopy:

26 Black

87 Bronze




Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
VOL_L73S3S 	Black	Black / Black	VOL_L73S3S_262626W	VOL_L73S3S_262626M
	White	Black / Black	VOL_L73S3S_742626W	VOL_L73S3S_742626M
	Black	Black / Satin Gold	VOL_L73S3S_262661W	VOL_L73S3S_262661M
	White	Black / Satin Gold	VOL_L73S3S_742661W	VOL_L73S3S_742661M
	Bronze	Bronze / Bronze	VOL_L73S3S_878787W	VOL_L73S3S_878787M

Lens Ordering Codes:

One 30° embedded lens per head

Black	3 units of 123530263
Satin Gold	3 units of 123530613
Bronze	3 units of 123530873



8. Ordering Codes

Lamping L92S4S

LED 4x6,2W

(Ang. 85° embedded nylon lens />90 CRI / 350mA)

230V

2700K / Typ* 4x725 lumens

3000K / Typ* 4x763 lumens

*Integrated LED module (included)

*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic lens: embedded aluminium optic lens 20°

Canopy: Multiple Surface

Finishes

Body & Head:

26 Black & 61 Satin Gold


26 Black

87 Bronze

Canopy:

26 Black

87 Bronze




Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
VOL_L92S4S 	Black	Black / Black	VOL_L92S4S_262626W	VOL_L92S4S_262626M
	White	Black / Black	VOL_L92S4S_742626W	VOL_L92S4S_742626M
	Black	Black / Satin Gold	VOL_L92S4S_262661W	VOL_L92S4S_262661M
	White	Black / Satin Gold	VOL_L92S4S_742661W	VOL_L92S4S_742661M
	Bronze	Bronze / Bronze	VOL_L92S4S_878787W	VOL_L92S4S_878787M

Lens Ordering Codes:

One 30° embedded lens per head

Black	4 units of 123530263
Satin Gold	4 units of 123530613
Bronze	4 units of 123530873



8. Ordering Codes

Lamping L165S6S

LED 6x6,2W

(Ang. 85° embedded nylon lens />90 CRI / 350mA)

230V

2700K / Typ* 6x725 lumens

3000K / Typ* 6x763 lumens

*Integrated LED module (included)

*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic lens: embedded aluminium optic lens 20°

Canopy: Multiple Surface

Finishes

Body & Head:

26 Black & 61 Satin Gold

26 Black

87 Bronze

Canopy:

26 Black

87 Bronze



Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
VOL_L165S6S 	Black	Black / Black	VOL_L165S6S_262626W	VOL_L165S6S_262626M
	White	Black / Black	VOL_L165S6S_742626W	VOL_L165S6S_742626M
	Black	Black / Satin Gold	VOL_L165S6S_262661W	VOL_L165S6S_262661M
	White	Black / Satin Gold	VOL_L165S6S_742661W	VOL_L165S6S_742661M
	Bronze	Bronze / Bronze	VOL_L165S6S_878787W	VOL_L165S6S_878787M

Lens Ordering Codes:


One 30° embedded lens per head

Black	6 units of 123530263
Satin Gold	6 units of 123530613
Bronze	6 units of 123530873

Volta

suspension lamp

9. Certifications & Standards



Warranty: 2 years

100% made in Spain

10. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.