

# Tik

bollard light



## Table of contents

|                                               |        |
|-----------------------------------------------|--------|
| 1. Product overview                           | Page 2 |
| 2. Finishes and materials                     | Page 2 |
| 3. Light Source & dimming                     | Page 2 |
| 4. Installation                               | Page 3 |
| 5. Photometric Data and Technical Information | Page 3 |
| 6. Ordering codes                             | Page 4 |
| 7. Certifications & standards                 | Page 5 |
| 8. Maintenance & Cleaning                     | Page 5 |

## Versions



TIK\_4098X  
Page 4



TIK\_4099X  
Page 4

# Tik

bollard light

---

## 1. Product overview

Metallic outdoor bollard light available in two heights: 494 mm and 804 mm. Features a PMMA lens diffuser (60° beam angle) and integrated LED, providing direct light. The cylindrical tube encloses the light source and is non-adjustable.

Built-in driver for direct mains connection. Surface-mounted on a solid base. A double-layer coating ensures high resistance.



## 2. Finishes and Materials



88 Grey Stone  
96 Anthracite  
89 Pale Green

## 3. Light Source & Dimming

### Lamping

LED 6,2W (2700K / Ang. 60° / >90 CRI / 350mA) 230V / Typ 725 lumens

Optic lens: (PMMA) lens diffuser 60°.

\*Integrated LED module (included).

### Dimming options:

Standard: TRIAC

Optional: DALI

## 4. Installation

### Built-in driver for direct mains connection

Surface-mounted on a solid base (concrete or similar).  
Not suitable for installation on soil or grass.



### 60° beam angle


Acrylic optic. It provides diffuse, uniform illumination and is visible as a decorative light line when viewed from the side.



## 5. Photometric Data and Technical Information

Photometric data corresponds to the output of each individual lamp.  
Access to photometric files in download area.

2D / 3D / BIM Files available. Access to files in download area here.

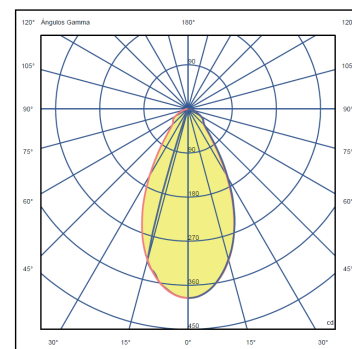

## 6. Ordering Codes

### Lamping 4098X

LED 6,2W (2700K / Ang. 60° / >90 CRI / 350mA)

230V / Typ 725 lumens

**Optic lens:** (PMMA) lens diffuser 60°

**DIM:** TRIAC (Optional DALI)


### Finishes:

88 Grey Stone

89 Pale Green

96 Anthracite



| Drawing                                                                                                 | Mounting                                                                    | Setting | Finish Body | Ordering Code |
|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------|-------------|---------------|
| TIK_4098X<br>IP65<br> | Bollard light.<br>Hard wired (no plug).<br>Surface mounted on a solid base. | Outdoor | Grey Stone  | TIK_4098X_88W |
|                                                                                                         |                                                                             | Outdoor | Pale Green  | TIK_4098X_89W |
|                                                                                                         |                                                                             |         | Anthracite  | TIK_4098X_96W |

### Lamping 4099X

LED 6,2W (2700K / Ang. 60° / >90 CRI / 350mA)

230V / Typ 725 lumens

**Optic lens:** (PMMA) lens diffuser 60°

**DIM:** Optional DALI


### Finishes:

88 Grey Stone


89 Pale Green

96 Anthracite

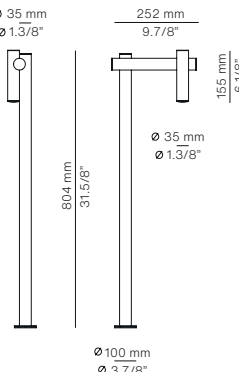

| Drawing                                                                                                  | Mounting                                                                    | Setting | Finish Body | Ordering Code |
|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------|-------------|---------------|
| TIK_4099X<br>IP65<br> | Bollard light.<br>Hard wired (no plug).<br>Surface mounted on a solid base. | Outdoor | Grey Stone  | TIK_4099X_88W |
|                                                                                                          |                                                                             | Outdoor | Pale Green  | TIK_4099X_89W |
|                                                                                                          |                                                                             |         | Anthracite  | TIK_4099X_96W |

## 7. Certifications & Standards



Warranty: 2 years  
100% made in Spain

---

## 8. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.