


# OUTDOOR



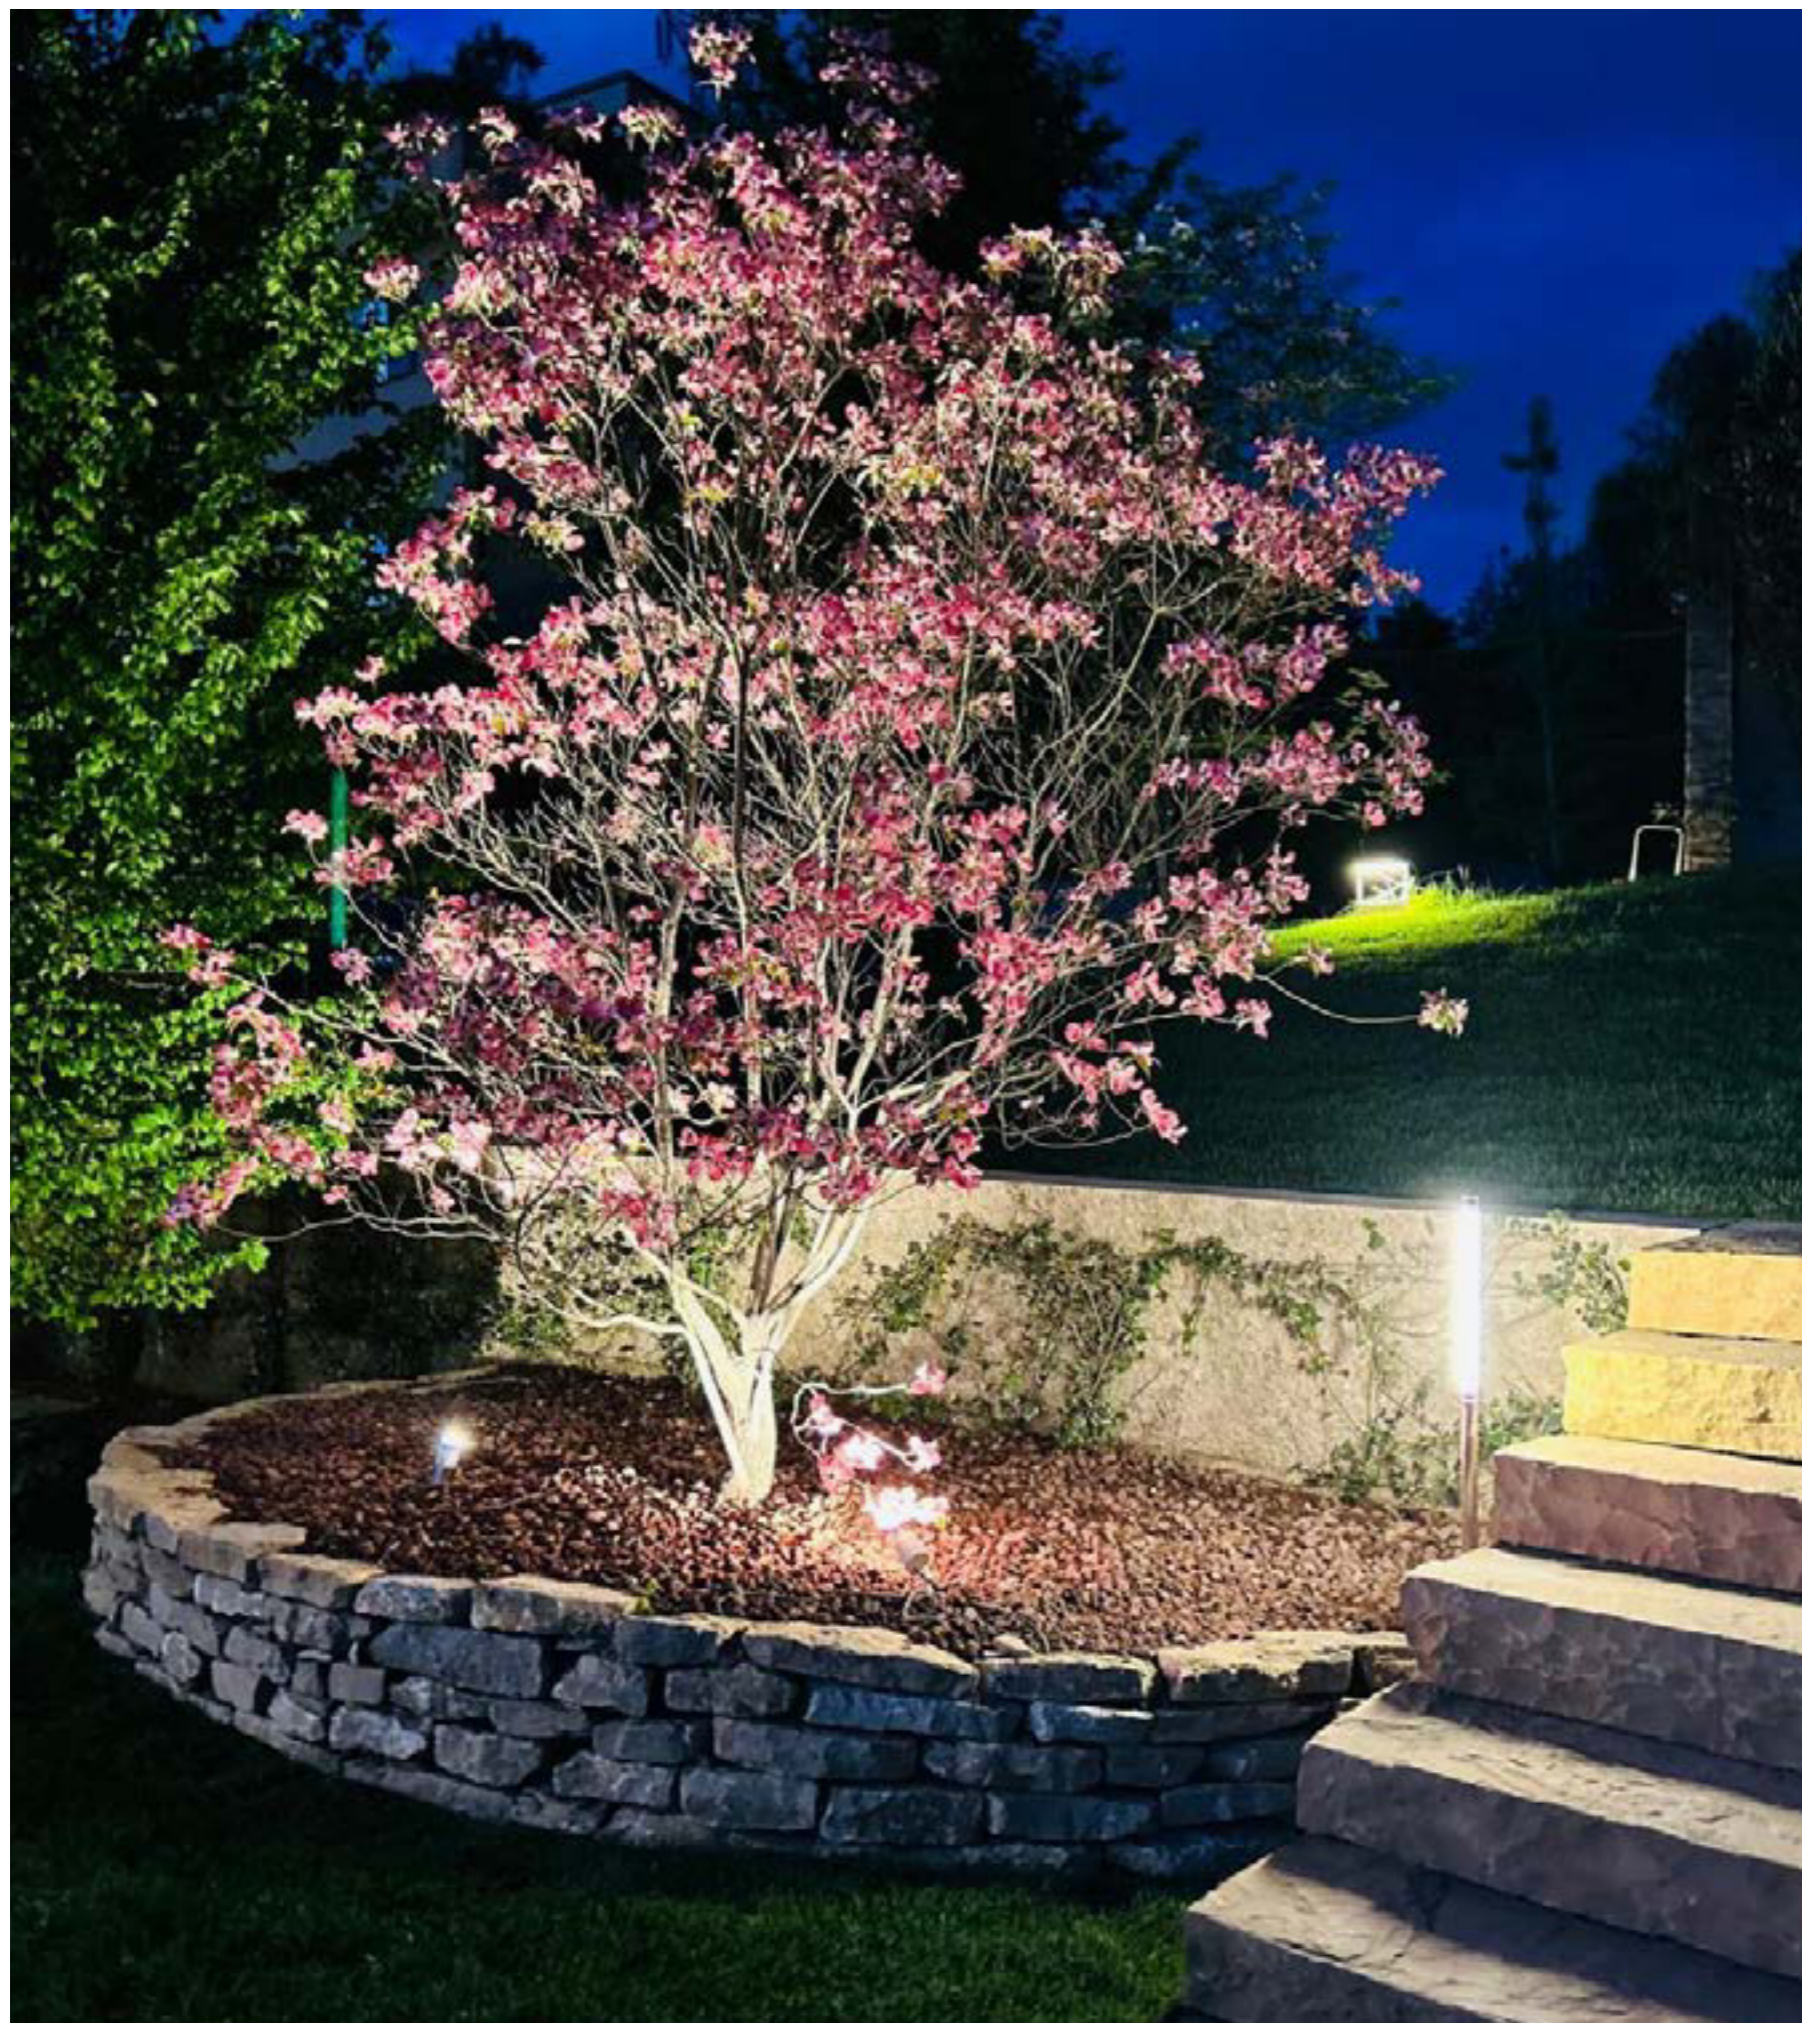

A good outdoor lighting design can really boost the vibe of a space and make people feel more comfortable and at ease. It can also bring out special architectural features, making the place even more inviting. But remember, outdoor lighting isn't just about looking pretty, it's mostly about safety. A well-lit environment helps people stay safe by clearly highlighting obstacles, stairs, and passageways.

Un buon progetto di illuminazione esterna può davvero dare un impulso all'atmosfera di uno spazio e far sentire le persone più comode e a proprio agio. Può anche far risaltare particolari caratteristiche architettoniche, rendendo il luogo ancora più invitante. Ma ricordate che l'illuminazione esterna non riguarda solo l'aspetto estetico, ma soprattutto la sicurezza. Un ambiente ben illuminato aiuta le persone a stare al sicuro, evidenziando chiaramente ostacoli, scale e passaggi.

## MATERIALS THAT MATTER: DURABILITY MEETS DESIGN

### MATERIALS

*We are committed to creating products with a long-lasting life, and it all begins with the right materials.*

- **316L Stainless Steel and marine-grade brass** excel in coastal locales, where salt spray would corrode lesser metals within months. Their natural resistance to chlorides and humidity keeps fixtures looking pristine.
- **Marine grade coating** is a type of surface treatment designed to protect materials (usually metal or wood) from weathering, chemicals and UV radiation in marine or highly corrosive environments. Marine grade paint can last for years without the need for touch-ups.
- **Anodising aluminium** is an electrochemical treatment used to create a protective layer of aluminium oxide on the surface of the metal, making it more resistant to corrosion, wear, scratches and weathering. When we speak of 20 micron outdoor anodising, we are referring to a process specifically designed to offer durable protection in outdoor environments, including more aggressive ones such as coastal areas. Anodised aluminium can be coloured and retains its appearance over time.
- **UV-stabilized polycarbonate or ASA plastics** are your friend under relentless sun—they won't yellow, crack or become brittle over the seasons.

### IP

When planning, always look for the IP code: the first digit (4–6) rates **dust and solid ingress**, the second (4–8) rates **water resistance**. Covered verandas might safely use IP44 fixtures, but pool decks and exposed walls should aim for IP65 or higher. And remember: a single compromised lens or cracked seal can let moisture in and drastically shorten a fixture's lifespan.


### MATERIALI

*Lavoriamo per creare prodotti che durino a lungo, e tutto inizia con i materiali giusti.*

- **Acciaio inox 316L e ottone marino** sono ideali in ambienti costieri, dove la salsedine corroderà rapidamente materiali inferiori. Questi metalli resistono naturalmente ai cloruri e all'umidità.
- **Verniciatura "marine grade"** è un tipo di trattamento superficiale pensato per proteggere materiali (in genere metallo o legno) da agenti atmosferici, chimici e raggi UV in ambienti marini o altamente corrosivi. La vernice marine grade può durare anni senza necessità di ritocchi.
- **Anodizzazione dell'alluminio** è un trattamento elettrochimico che serve a creare uno strato protettivo di ossido di alluminio sulla superficie del metallo, rendendolo più resistente alla corrosione, ai graffi e agli agenti atmosferici. Quando si parla di anodizzazione per esterno a 20 micron, si fa riferimento a un processo specificamente progettato per offrire una protezione durevole in ambienti esterni, inclusi quelli più aggressivi come le zone costiere. Può essere colorato e mantiene l'aspetto a lungo nel tempo.
- **Policarbonato UV-stabilizzato o plastica ASA** sono la scelta giusta sotto il sole cocente: non ingialliscono né si spezzano col tempo.

### IP

Controlla sempre il codice IP: la prima cifra (4–6) indica la protezione da **corpi solidi**, la seconda (4–8) da **liquidi**. Verande coperte possono utilizzare apparecchi IP44, ma per bordi piscina o pareti esposte serve almeno IP65. Ricorda: una sola guarnizione danneggiata può compromettere tutto il sistema.

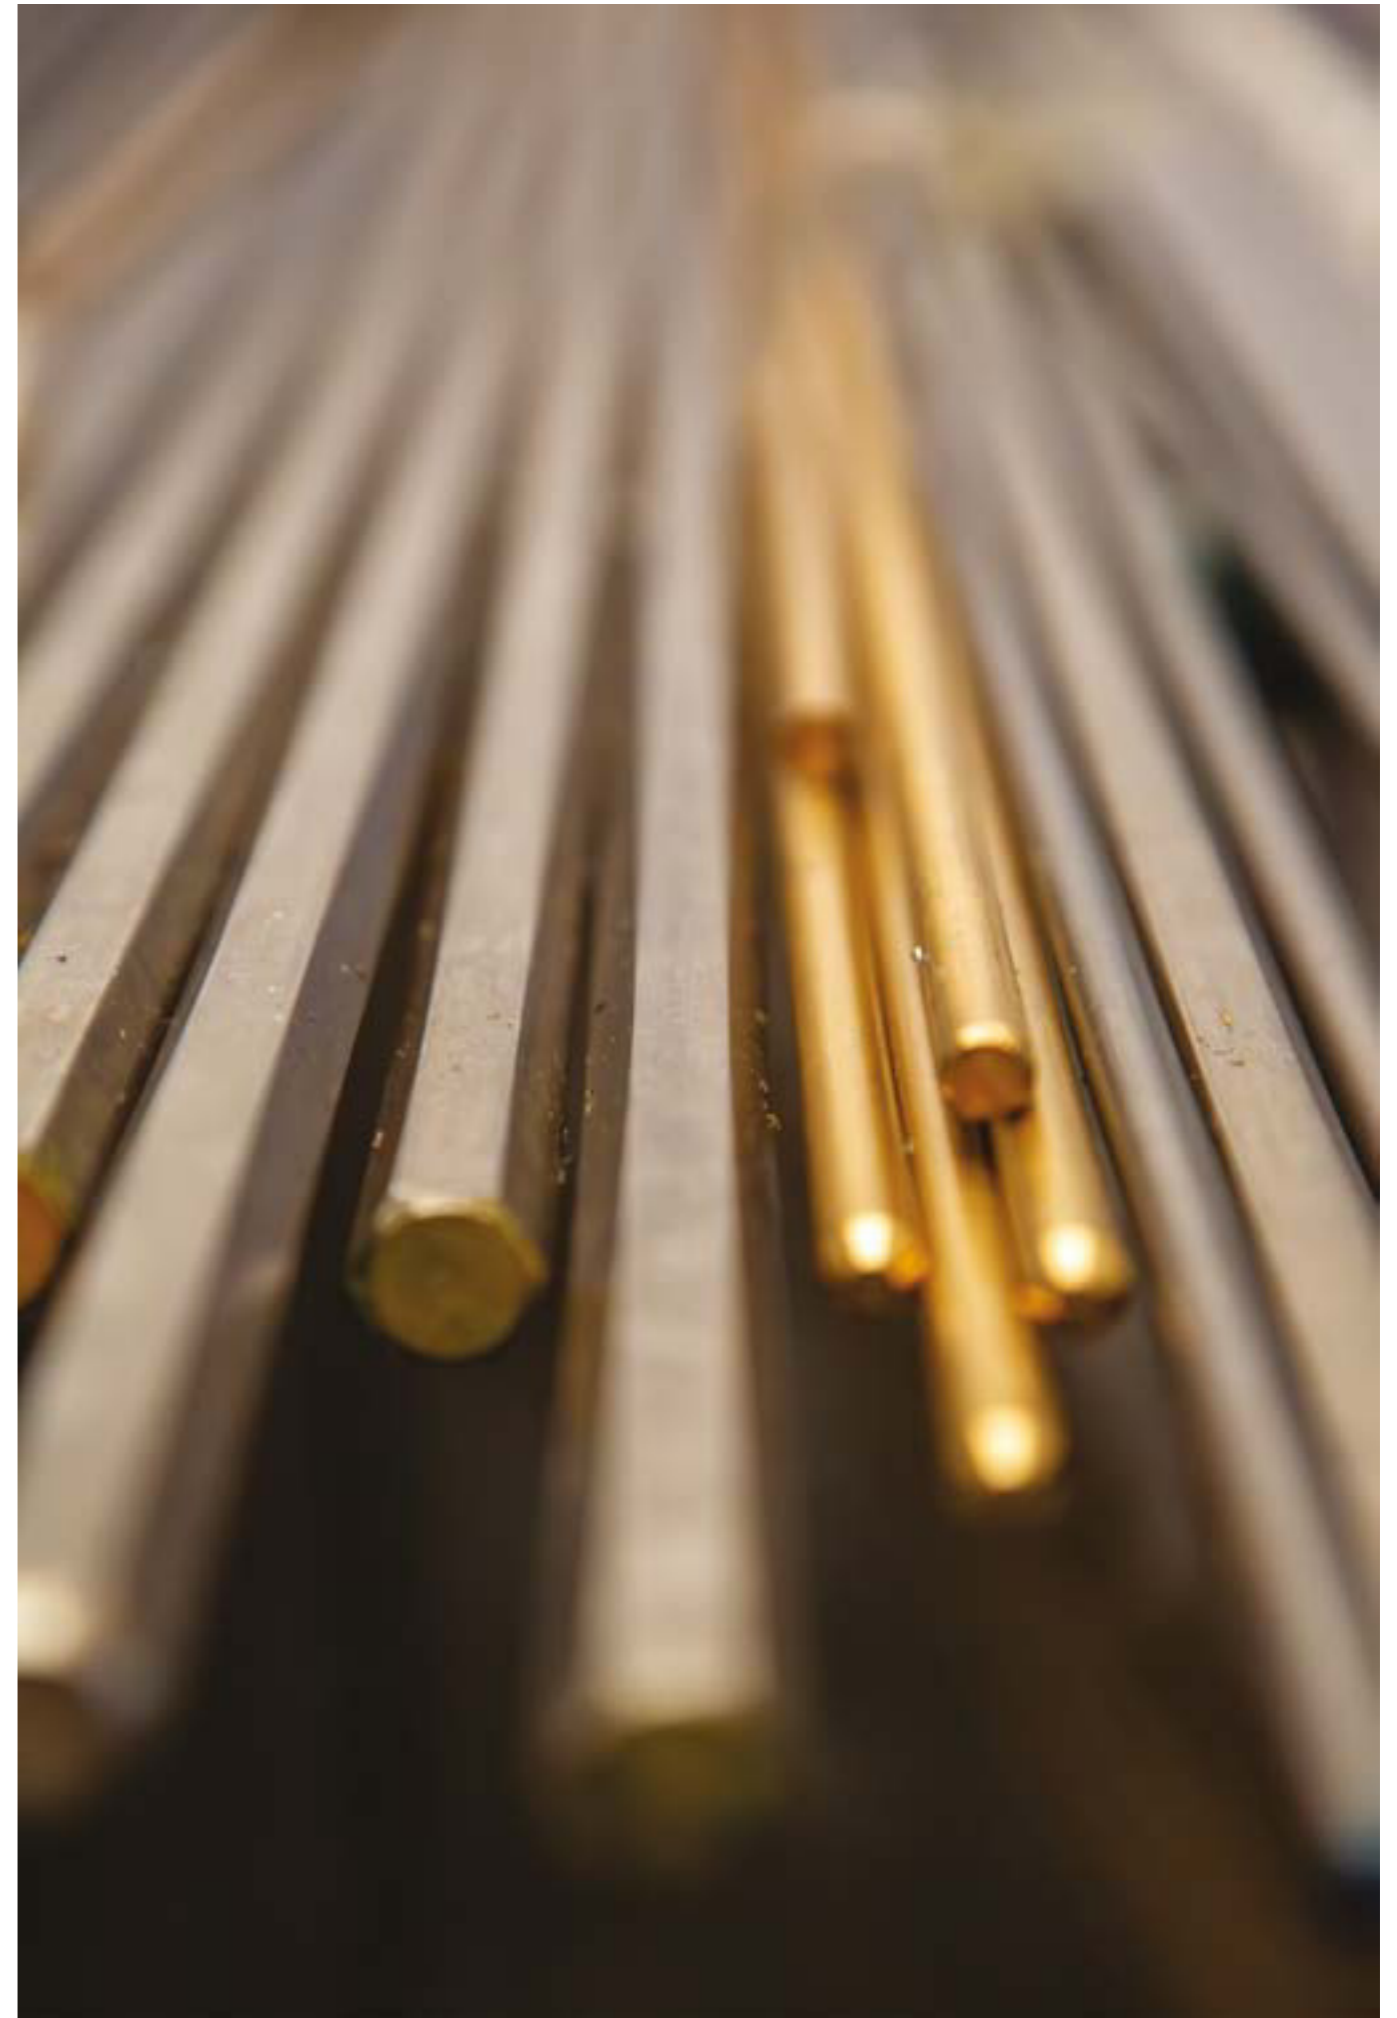

# LAYOUT

Product Name	Technical drawings	Tipology symbol	
TRILLI			
Product Code	Technical data	Technical symbols	Product picture

## PRODUCT SPECIFICATIONS

Characters in bold are used for codes and specifications which are necessary to identify the product code to be specified in the order.

I caratteri in grassetto sono utilizzati per i codici e le specifiche sono utilizzati per identificare il codice prodotto da includere nell'ordine.

Color code	Light color	Gross Lumen Package
0000	4000K	12000lm
0001	3000K	12000lm
0002	2700K	12000lm

## SYMBOLS

- Suspension
- Cable
- Track
- Wall
- Ceiling
- Recessed Wall
- Recessed Ceiling
- Table
- Floor
- Converter included
- Converter not included
- Cable length
- Dimmer included
- CRI Color Rendering Index
- Reparable fixture
- Rotation
- Beam angle
- IP65 Protection class
- Cut Out
- Walk over fitting
- Drive over fitting
- Surface Temperature

## MARKS

- Fixture on Class II, with double or reinforced insulation
- SELV fixture with remote transformer
- Fixture ready for installation on normally inflammable surfaces

## ACCESSORIES CODES

- /DIM Dimmer
- /DIM Dimmer
- /DALI Dimmer

## LIGHT COLOR CODES

- /W** Natural White Led 4000K
- /WW** Warm white Led 3000K
- /XW** Extra white Led 2700K

## IP

**1st digit:** protection against penetration by solid bodies

- 0** No protection
- 1** Protected against solid matters (over 50mm)
- 2** Protected against solid matters (over 12mm)
- 3** Protected against solid matters (over 2,5mm)
- 4** Protected against solid matters (over 1mm)
- 5** Dust proof
- 6** Fully dust proof

**2nd digit:** protection against penetration by water

- 0** No protection
- 1** Protected against drops of water falling vertically
- 3** Rain proof fixture
- 4** Splash proof fixture
- 5** Water jet proof
- 6** Wave proof
- 7** Watertight immersion fixture

# INDEX

## OUTDOOR




**Cerchio**  
138



**Drive**  
162



**Drum**  
226



**Jazz**  
214



**Eclipse IP**  
122



**Kross**  
146



**Kross Mini**  
148



**Raccordi di luce Joy**  
78



**Raccordi di luce Joy**  
78



**Raccordi di luce Joy**  
78




**Raccordi di luce Joy**  
84



**Raccordi di luce Joy System**  
86



**Raccordi di luce Joy System**  
86



**Raccordi di luce Joy System**  
90



**Roc**  
220



**Soft**  
174



**Spillo**  
70



**Spook**  
42



**Step Mini**  
180

## OUTDOOR



**Top IP**  
132



**Trilli**  
108



**Tris**  
168



**Vision 1**  
58



**Vision 2**  
60



**Vision 3**  
62




**Vista**  
154



**Vista Mini**  
156



**Wanda**  
14



**Wanda System**  
32



**Zeppelin Mini**  
204



**Zeppelin Mini Plus**  
206



**Zeppelin**  
192



**Zeppelin Plus**  
198



**Zeppelin Maxi COB**  
202



**Zeppelin Maxi**  
200




**Zeppelin Adjustable**  
208

# WANDA





## WANDA




IP67 adjustable light bar for wall and ceiling or suspension applications with diffused light made of transparent anti-UV coextruded methacrylate and terminals in stainless steel. Wanda is offered in different modular lengths from 18 cm up to 298 cm and in three shades of light, 2700K, 3000K, and 4000K, with CRI>90. This simple yet effective illumination offers creative solutions for various environments, from offices and kitchens to outdoor poolside and gardens.

*Barra luminosa orientabile IP67 per applicazioni a parete e a soffitto o a sospensione con luce diffusa in metacrilato coestruso trasparente anti-UV e terminali in acciaio inox. Wanda è disponibile in diverse lunghezze modulari da 18 cm a 298 cm e in tre tonalità di luce, 2700K, 3000K e 4000K, con CRI>90. Questa illuminazione semplice ma efficace offre soluzioni creative per diversi ambienti, da uffici e cucine a bordi di piscine e giardini esterni.*

*Verstellbarer IP67-Lichtbalken für Wand-, Decken- oder Hängeanwendungen mit diffusem Licht aus transparentem, UV-beständigem, koextrudiertem Methacrylat und Anschlüssen aus Edelstahl. Wanda wird in verschiedenen modularen Längen von 18 cm bis 298 cm und in drei Lichtfarben, 2700K, 3000K und 4000K, mit einem CRI>90 angeboten. Diese einfache, aber effektive Beleuchtung bietet kreative Lösungen für verschiedene Umgebungen, von Büros und Küchen bis hin zu Außenpools und Gärten.*





# WANDA

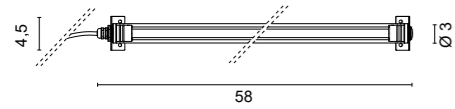

**4536.33/** 0,50 Kg

**.33** Stainless Steel AISI 316L


<b>/W</b>	4000K	LED 24V 7,5W	920lm
<b>/WW</b>	3000K	LED 24V 7,5W	825lm
<b>/XW</b>	2700K	LED 24V 7,5W	780lm

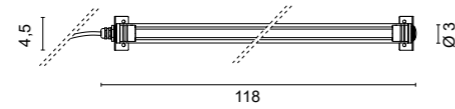

**4537.33/** 1,00 Kg

**.33** Stainless Steel AISI 316L



<b>/W</b>	4000K	LED 24V 16,5W	2024lm
<b>/WW</b>	3000K	LED 24V 16,5W	1815lm
<b>/XW</b>	2700K	LED 24V 16,5W	1716lm

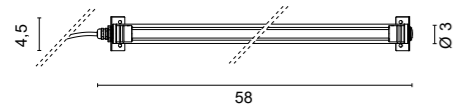

**4538.33** 0,50 Kg

**.33** Stainless Steel AISI 316L

LED 24V 7,2W

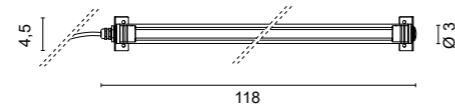

**4539.33** 1,00 Kg

**.33** Stainless Steel AISI 316L

LED 24V 16,5W



## DRIVERS

### ON/OFF

Cod.	0155	0156	0169	0157	0161/100	0161/150
	24V-13W	24V-20W	24V-60W	24V-75W	24V-100W	24V-150W

### IP67 DRIVERS

Cod.	0033/IP	0034/IP	0038/IP	0035/IP
	24V 14,4W	24V 70W	24V 100W	24V 160W

### DIMMABLE DRIVERS

Cod.	0717/DIM60/V	0717/DIM60	0717/DIM100	0717/DIM150
	24V-60W 1... 10V	24V-60W PUSH - DALI	24V-100W 1... 10V - PUSH - DALI	24V-150W 1... 10V - PUSH - DALI

### DIMMABLE DRIVERS - PHASE CUT-OFF

Cod.	0727/DIM30	0727/DIM50	0717/DIM100/T	0717/DIM150/T
	24V-30W TRIAC	24V-50W TRIAC	24V-100W TRIAC	24V-150W TRIAC

Only Parallel Connection

### DRIVER RGB

0164	0167	0163	0165	0166
120W	22W	IR Sensor	IR Remote controller	Sync Cable

IN 230V - OUT 3 X 24V

### LED EMERGENCY UNIT

0115/EM
INVERTER + BATTERY + LED INDICATOR

## CUSTOM SIZE

Table of available lengths. Measures are referred to complete fixtures including closing heads.


cm	watt	2700K	lm	3000K	lm	4000K	lm	RGB
18	1,5W	A4536.33/18/XW	152	A4536.33/18/WW	165	A4536.33/18/W	184	A4536.33/18RGB
28	3W	A4536.33/28/XW	312	A4536.33/28/WW	330	A4536.33/28/W	368	A4536.33/28RGB
38	4,5W	A4536.33/38/XW	468	A4536.33/38/WW	495	A4536.33/38/W	552	A4536.33/38RGB
48	6W	A4536.33/48/XW	624	A4536.33/48/WW	660	A4536.33/48/W	736	A4536.33/48RGB
58	7,5W	4536.33/XW	780	4536.33/WW	825	4536.33/W	920	4538.33
68	9W	A4536.33/68/XW	936	A4536.33/68/WW	990	A4536.33/68/W	1104	A4536.33/68RGB
78	10,5W	A4536.33/78/XW	1092	A4536.33/78/WW	1155	A4536.33/78/W	1288	A4536.33/78RGB
88	12W	A4536.33/88/XW	1248	A4536.33/88/WW	1320	A4536.33/88/W	1472	A4536.33/88RGB
98	13,5W	A4536.33/98/XW	1404	A4536.33/98/WW	1485	A4536.33/98/W	1656	A4536.33/98RGB
108	15W	A4536.33/108/XW	1560	A4536.33/108/WW	1650	A4536.33/108/W	1840	A4536.33/108RGB
118	16,5W	4537.33/XW	1716	4537.33/WW	1815	4537.33/W	2024	4539.33
128	18W	A4536.33/128/XW	1872	A4536.33/128/WW	1980	A4536.33/128/W	2208	A4536.33/128RGB
138	19,5W	A4536.33/138/XW	2028	A4536.33/138/WW	2145	A4536.33/138/W	2392	A4536.33/138RGB
148	21W	A4536.33/148/XW	2184	A4536.33/148/WW	2310	A4536.33/148/W	2576	A4536.33/148RGB
158	22,5W	A4536.33/158/XW	2340	A4536.33/158/WW	2475	A4536.33/158/W	2760	A4536.33/158RGB
168	24W	A4536.33/168/XW	2496	A4536.33/168/WW	2640	A4536.33/168/W	2944	A4536.33/168RGB
178	25,5W	A4536.33/178/XW	2652	A4536.33/178/WW	2805	A4536.33/178/W	3128	A4536.33/178RGB
188	27W	A4536.33/188/XW	2808	A4536.33/188/WW	2970	A4536.33/188/W	3312	A4536.33/188RGB
198	28,5W	A4536.33/198/XW	2964	A4536.33/198/WW	3135	A4536.33/198/W	3496	A4536.33/198RGB
208	30W	A4536.33/208/XW	3120	A4536.33/208/WW	3300	A4536.33/208/W	3680	A4536.33/208RGB
218	31,5W	A4536.33/218/XW	3276	A4536.33/218/WW	3465	A4536.33/218/W	3864	A4536.33/218RGB
228	33W	A4536.33/228/XW	3432	A4536.33/228/WW	3630	A4536.33/228/W	4048	A4536.33/228RGB
238	34,5W	A4536.33/238/XW	3588	A4536.33/238/WW	3795	A4536.33/238/W	4232	A4536.33/238RGB
248	36W	A4536.33/248/XW	3744	A4536.33/248/WW	3960	A4536.33/248/W	4416	A4536.33/248RGB
258	37,5W	A4536.33/258/XW	3900	A4536.33/258/WW	4125	A4536.33/258/W	4600	A4536.33/258RGB
268	39W	A4536.33/268/XW	4056	A4536.33/268/WW	4290	A4536.33/268/W	4784	A4536.33/268RGB
278	40,5W	A4536.33/278/XW	4212	A4536.33/278/WW	4455	A4536.33/278/W	4968	A4536.33/278RGB
288	42W	A4536.33/288/XW	4368	A4536.33/288/WW	4620	A4536.33/288/W	5152	A4536.33/288RGB
298	43,5W	A4536.33/298/XW	4524	A4536.33/298/WW	4785	A4536.33/298/W	5336	A4536.33/298RGB

## FINISHES CODES



**.33** Stainless Steel AISI 316L




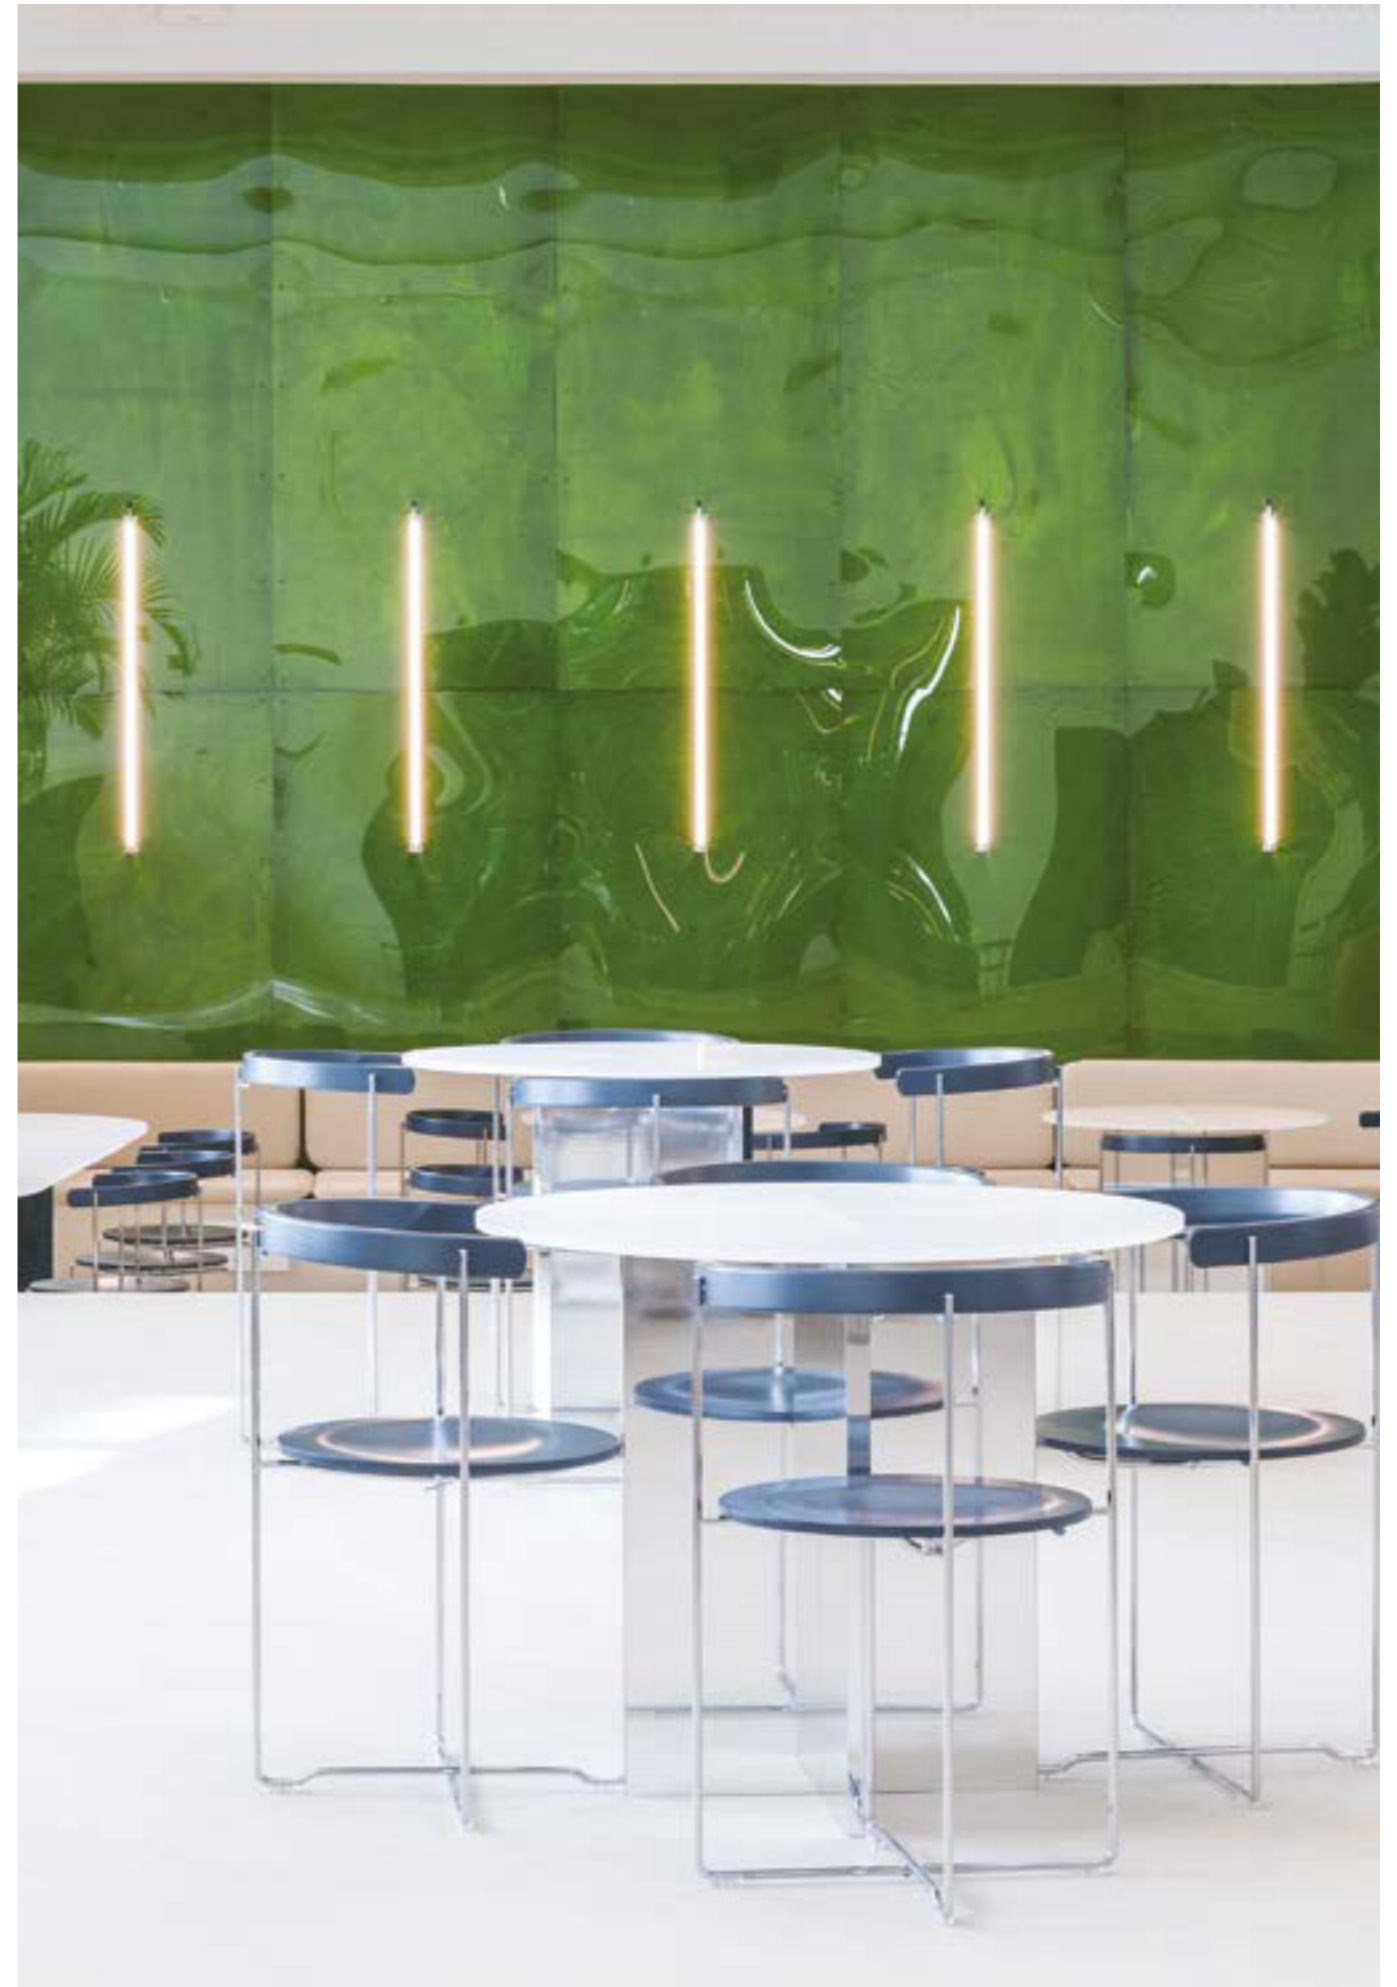



Cobra studios design, HUGUES DELAUNAY & KENNY DECOMMER



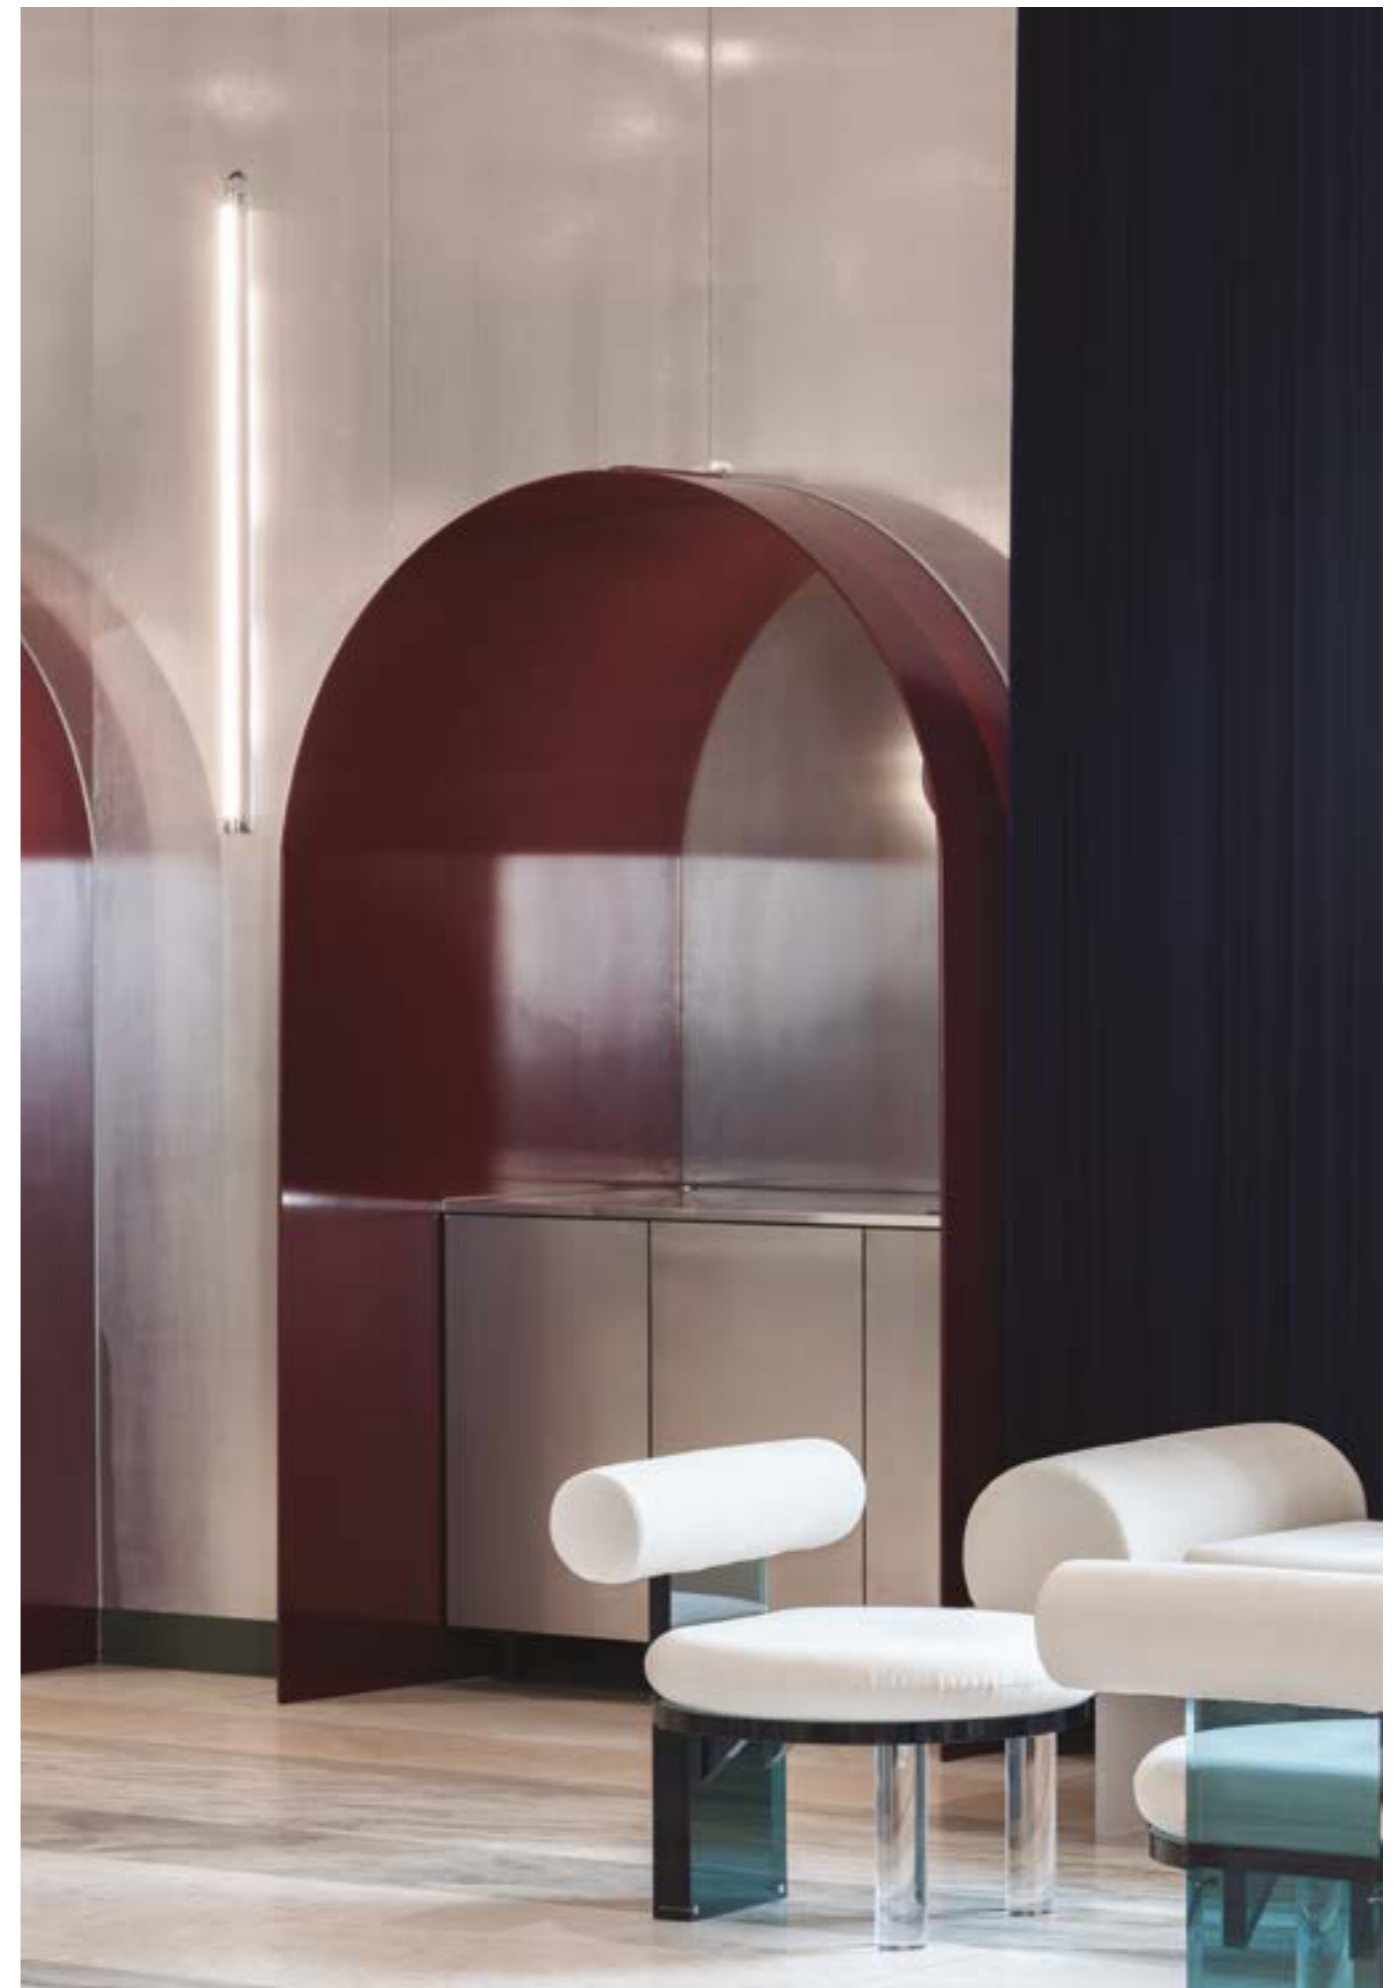










# WANDA SYSTEM

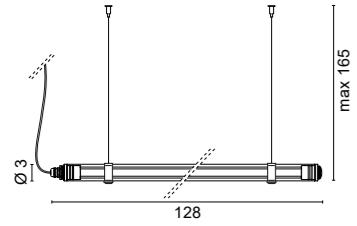


**1642.33** 0,70 Kg

<b>.33</b>	Stainless Steel AISI 316L		
<b>/W</b>	4000K	LED 24V 18W	2208lm
<b>/WW</b>	3000K	LED 24V 18W	1980lm
<b>/XW</b>	2700K	LED 24V 18W	1872lm



Suspension fixing kit supplied with the lamp

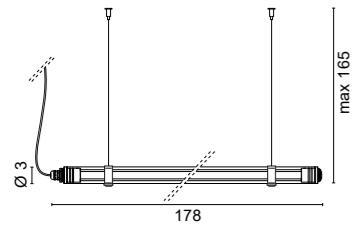


**1644.33** 1,53 Kg

<b>.33</b>	Stainless Steel AISI 316L		
<b>/W</b>	4000K	LED 24V 25,5W	3128lm
<b>/WW</b>	3000K	LED 24V 25,5W	2805lm
<b>/XW</b>	2700K	LED 24V 25,5W	2652lm




Suspension fixing kit supplied with the lamp

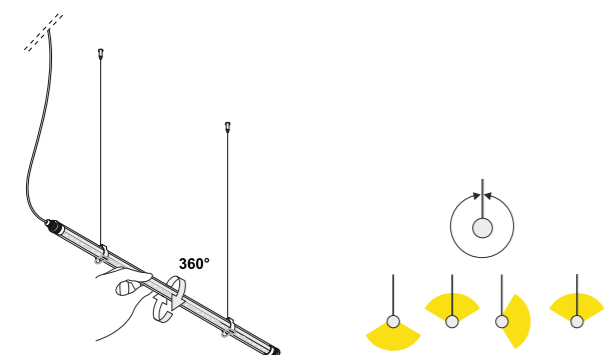

## FINISHES CODES



**.33** Stainless Steel  
AISI 316L

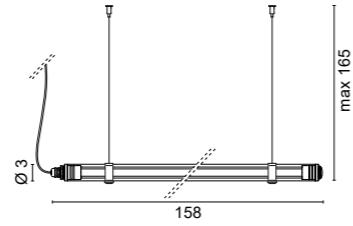


**1643.33** 1,36 Kg

<b>.33</b>	Stainless Steel AISI 316L		
<b>/W</b>	4000K	LED 24V 22,5W	2760lm
<b>/WW</b>	3000K	LED 24V 22,5W	2475lm
<b>/XW</b>	2700K	LED 24V 22,5W	2340lm



Suspension fixing kit supplied with the lamp

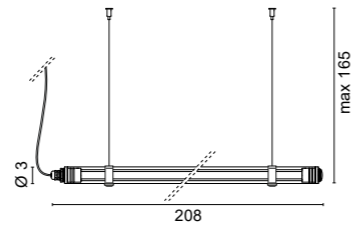


**1645.33** 1,79 Kg

<b>.33</b>	Stainless Steel AISI 316L		
<b>/W</b>	4000K	LED 24V 30W	3680lm
<b>/WW</b>	3000K	LED 24V 30W	3300lm
<b>/XW</b>	2700K	LED 24V 30W	3120lm




Suspension fixing kit supplied with the lamp

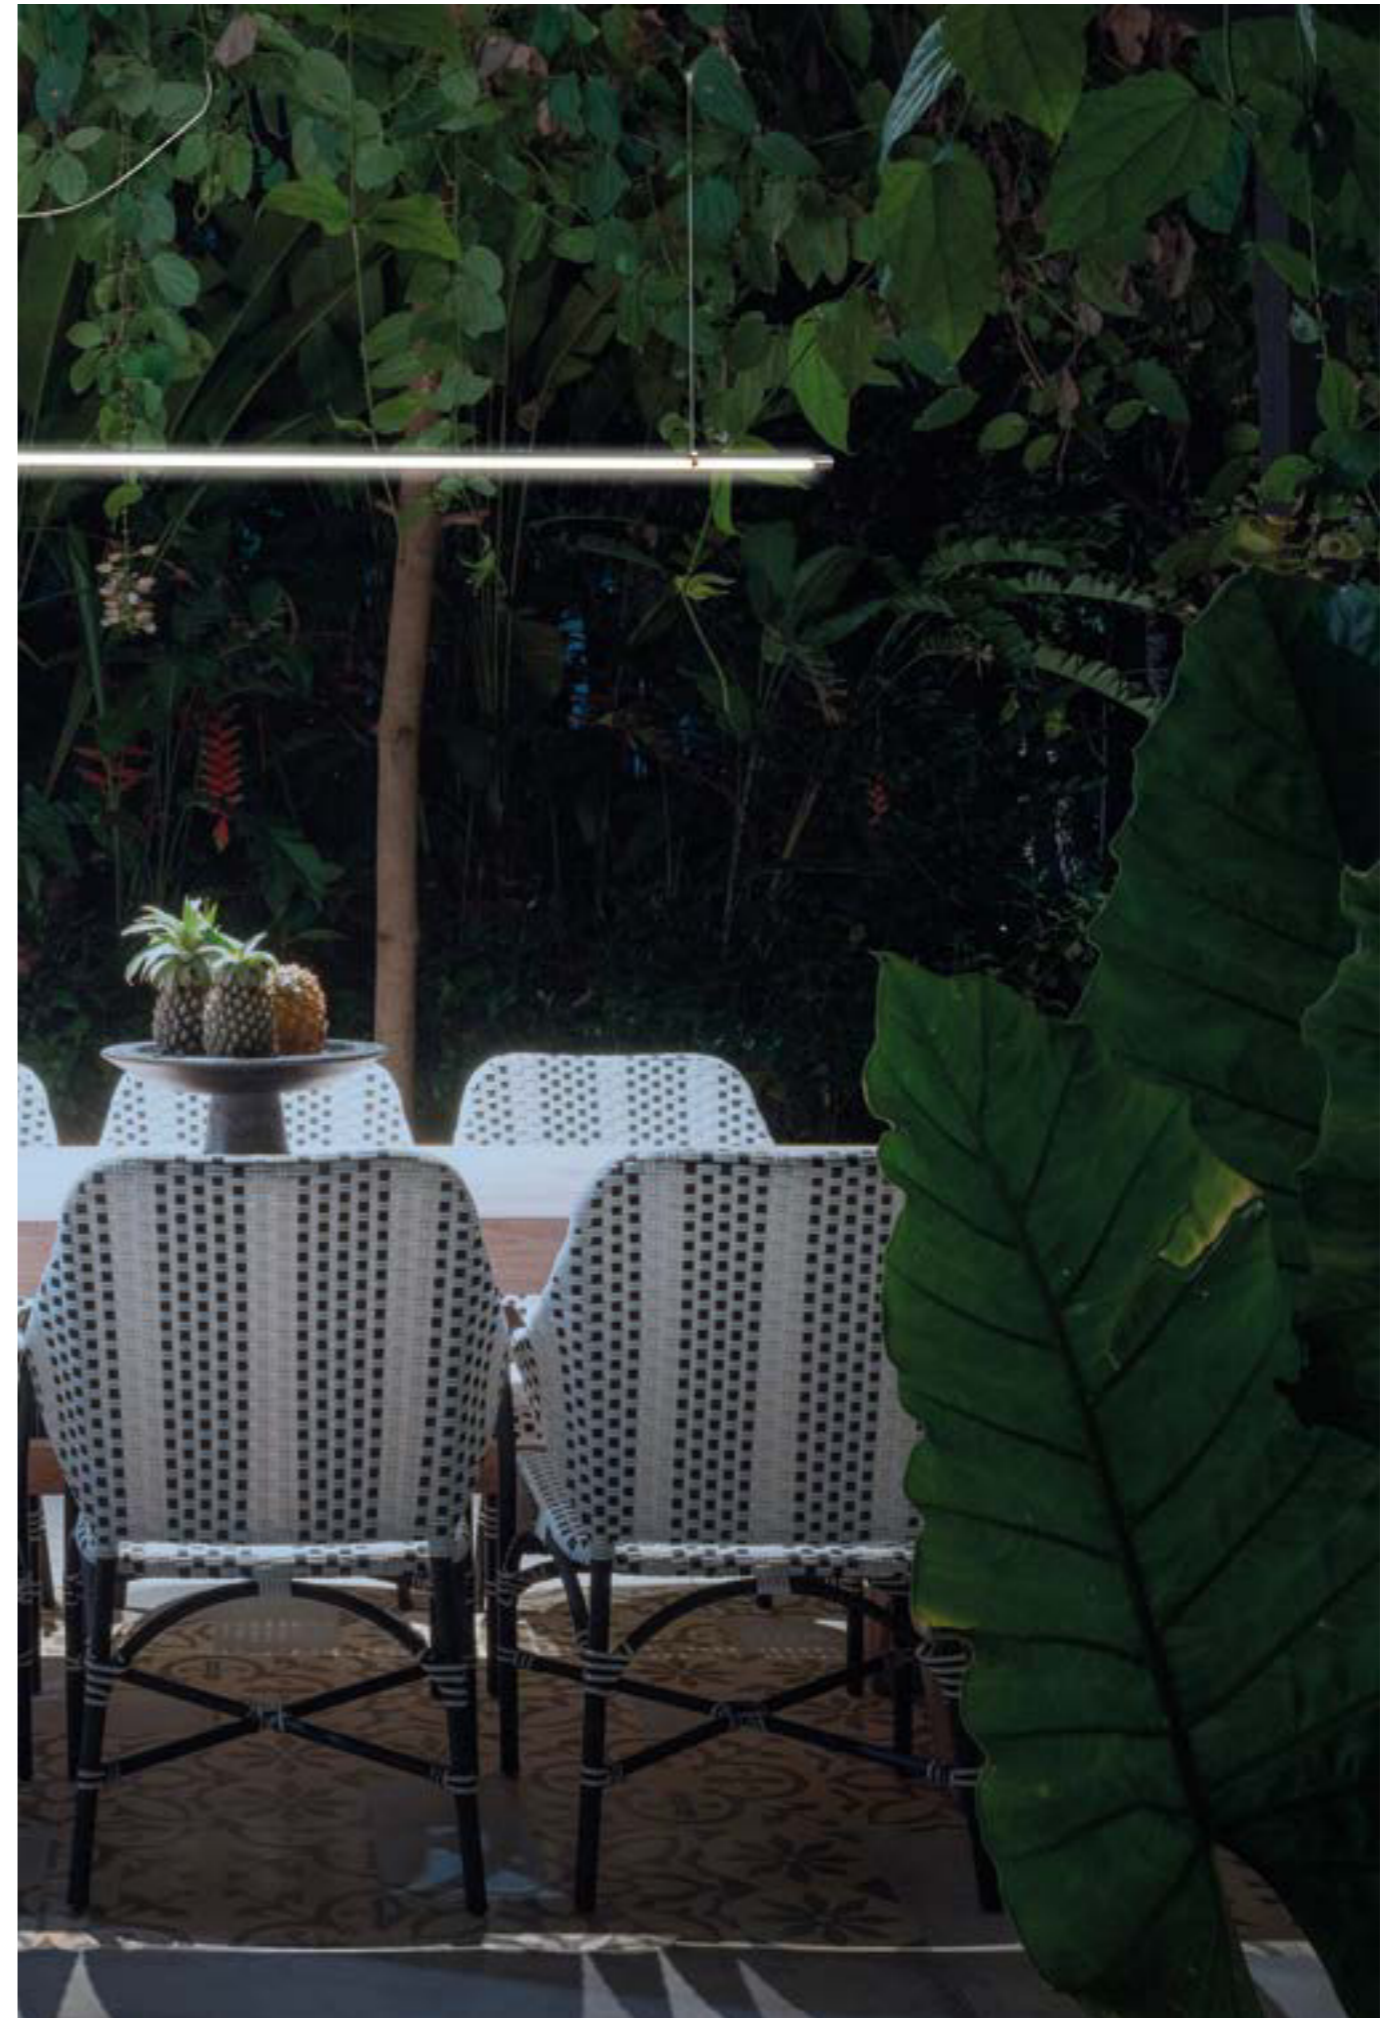

## CEILING ROSES FOR SUSPENSION SYSTEM 24V

WANDA system




Ceiling rose with **30W** driver

50/60Hz 220-230V

### 0990/30

0,50Kg

- .01 White ■
- .02 Black ■
- .23 Satin Aluminium ■




Ceiling rose with **60W** driver

50/60Hz 220-230V

### 0993/60

0,60Kg

- .01 White ■
  - .02 Black with white base ■
- /P DIMMER
- /V DIMMER
- /D DIMMER




Ceiling rose with **60W** driver

50/60Hz 220-230V

### 0990/60

0,60Kg

- .01 White ■
  - .02 Black ■
  - .85 Painted Silver ■
  - .86 Painted Gold ■
  - .87 Painted Copper ■
  - .88 Painted Bronze ■
- /P DIMMER  MAX 60W
- /V DIMMER  MAX 60W
- /D DIMMER  MAX 60W




Ceiling rose with **100W** driver

50/60Hz 220-230V

### 0990/100

1,30Kg

- .01 White ■
  - .02 Black ■
  - .85 Painted Silver ■
  - .86 Painted Gold ■
  - .87 Painted Copper ■
  - .88 Painted Bronze ■
- /P DIMMER  MAX 100W
- /V DIMMER  MAX 100W
- /D DIMMER  MAX 100W
- /T DIMMER  MAX 100W




Ceiling rose with **150W** driver

50/60Hz 220-230V

### 0990/150

1,30Kg

- .01 White ■
  - .02 Black ■
  - .85 Painted Silver ■
  - .86 Painted Gold ■
  - .87 Painted Copper ■
  - .88 Painted Bronze ■
- /P DIMMER  MAX 150W
- /V DIMMER  MAX 150W
- /D DIMMER  MAX 150W
- /T DIMMER  MAX 150W




Ceiling rose with **200W** driver

50/60Hz 220-230V

### 0990/200

2,30 kg

- .01 White ■
  - .02 Black ■
  - .85 Painted Silver ■
  - .86 Painted Gold ■
  - .87 Painted Copper ■
  - .88 Painted Bronze ■
- /P DIMMER  MAX 2x100W
- /V DIMMER  MAX 2x100W
- /D DIMMER  MAX 2x100W
- /T DIMMER  MAX 2x100W

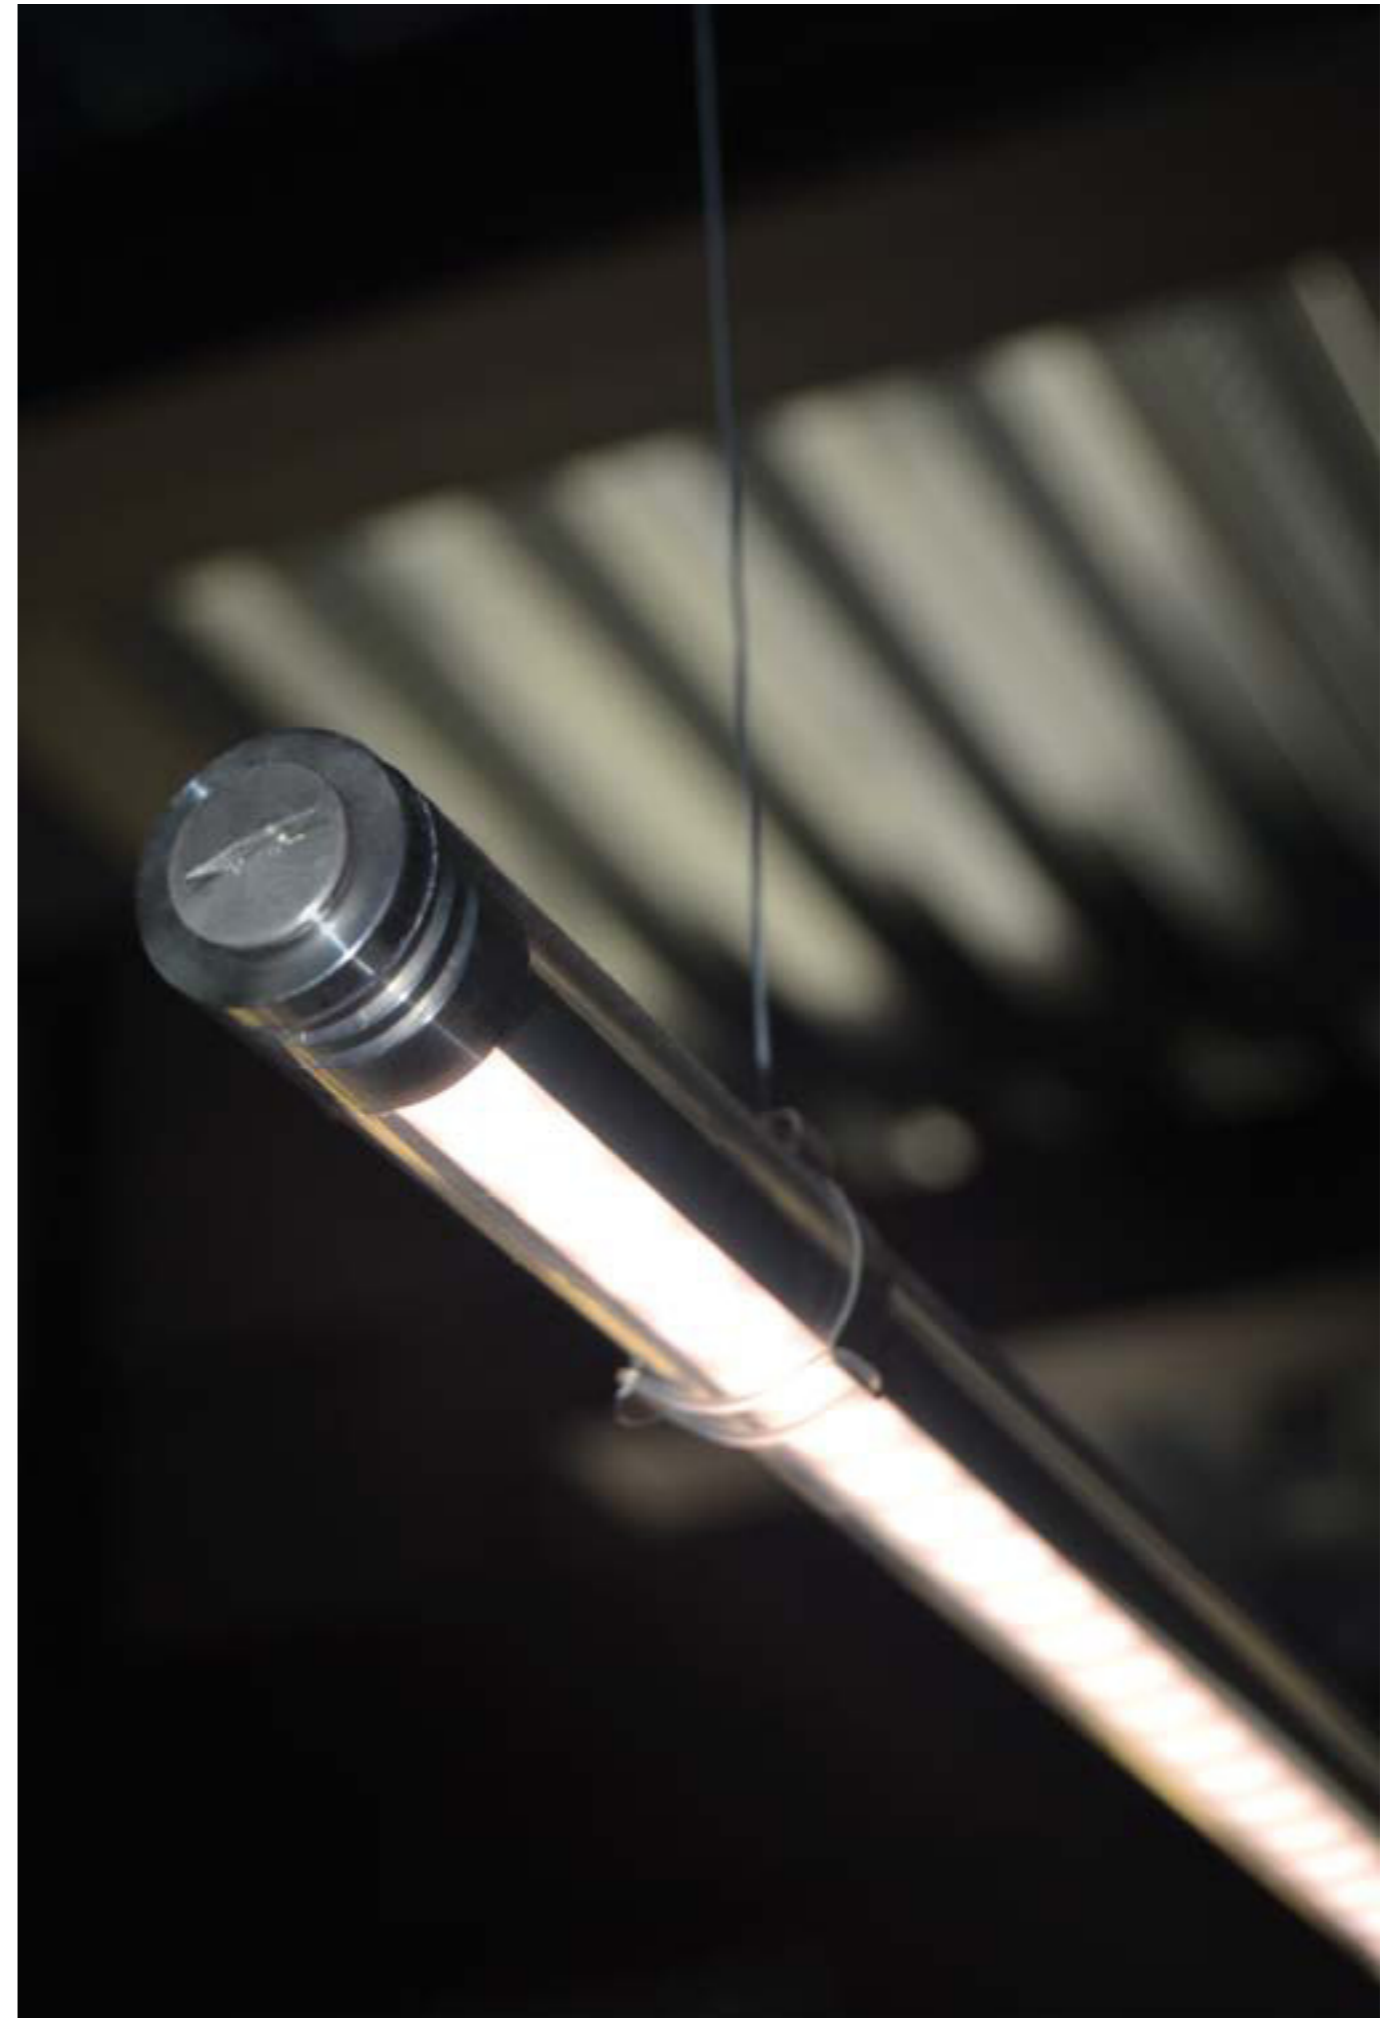





# SPOOK





## SPOOK



LED linear trampleable IP67 in coextruded transparent and opal methacrylate.

Modular anodized aluminium blind boxes (reinforced anodizing for outdoor).

To be installed into floor or wall and possibility to compose endless light lines.

*LED lineare calpestabile IP67 in metacrilato coestruso trasparente e opale.*

*Scatole cieche modulari in alluminio anodizzato (anodizzazione rinforzata per esterni).*

*Da installare a pavimento o a parete e possibilità di comporre infinite linee luminose.*


*Begehbarer LED Einbaulinie IP67, Struktur aus transparentem und opalisiertem fließgepresstem Methakrylat.*

*Modularen Einbaugehäuse aus Aluminium (verstärktem Eloxierung für Außenbereich) für wand-oder Bode-*

*neinsetzung. Montage als endlose Linearsystem möglich.*



# SPOOK

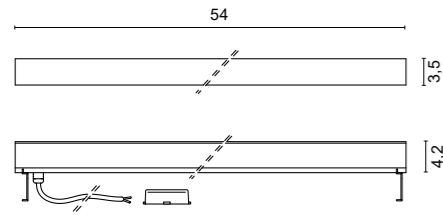

**6417** 0,80 Kg


**.01** White

**/W** 4000K LED 24V 4,8W 540lm

**/WW** 3000K LED 24V 4,8W 510lm



IP67 connector included

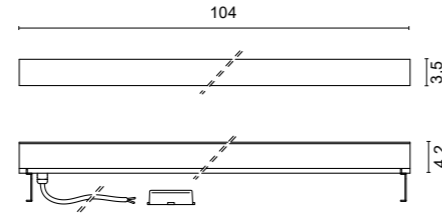

**6418** 1,60 Kg


**.01** White

**/W** 4000K LED 24V 9,6W 1080lm

**/WW** 3000K LED 24V 9,6W 1020lm



IP67 connector included

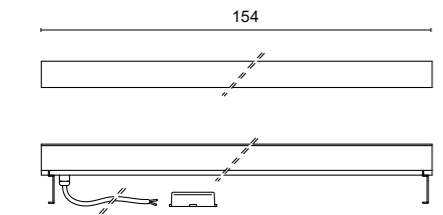

**6419** 2,30 Kg

**.01** White

**/W** 4000K LED 24V 14,4W 1620lm

**/WW** 3000K LED 24V 14,4W 1530lm



IP67 connector included

## FINISHES CODES



**.01** White



## CUSTOM SIZE

Table of available lengths Measures are referred to complete fixtures including closing heads

cm	watt	3000K	lm	4000K	lm
14	1W	A6417.01/14/WW	102	A6417.01/14/W	108
24	1,9W	A6417.01/24/WW	204	A6417.01/24/W	216
34	2,9W	A6417.01/34/WW	306	A6417.01/34/W	324
44	3,8W	A6417.01/44/WW	408	A6417.01/44/W	432
54	4,8W	6417.01/WW	510	6417.01/W	540
64	5,8W	A6417.01/64/WW	612	A6417.01/64/W	648
74	6,7W	A6417.01/74/WW	714	A6417.01/74/W	756
84	7,7W	A6417.01/84/WW	816	A6417.01/84/W	864
94	8,6W	A6417.01/94/WW	918	A6417.01/94/W	972
104	9,6W	6418.01/WW	1020	6418.01/W	1080
114	10,6W	A6417.01/114/WW	1122	A6417.01/114/W	1188
124	11,5W	A6417.01/124/WW	1224	A6417.01/124/W	1296
134	12,5W	A6417.01/134/WW	1326	A6417.01/134/W	1404
144	13,4W	A6417.01/144/WW	1428	A6417.01/144/W	1512
154	14,4W	6419.01/WW	1530	6419.01/W	1620

## DRIVERS

### ON/OFF

Cod.	0155	0156	0157	0160	0161/100	0162
	24V-13W	24V-20W	24V-75W	24V-60W	24V-100W	24V-150W

### DIMMABLE

Cod.	0717/DIM60	0717/DIM60/V	0717/DIM100
	24V-60W PUSH - DALI	24V-60W 1...10V	24V-100W 1...10V - PUSH - DALI

### IP67 DRIVER

Cod.	0033/IP	0034/IP	0036/IP
	24V 14,4W	24V 70W	24V 160W


### LED EMERGENCY UNIT

**0115/EM** INVERTER + BATTERY + LED INDICATOR

Only Parallel Connection



CONFIGURATION EXAMPLE

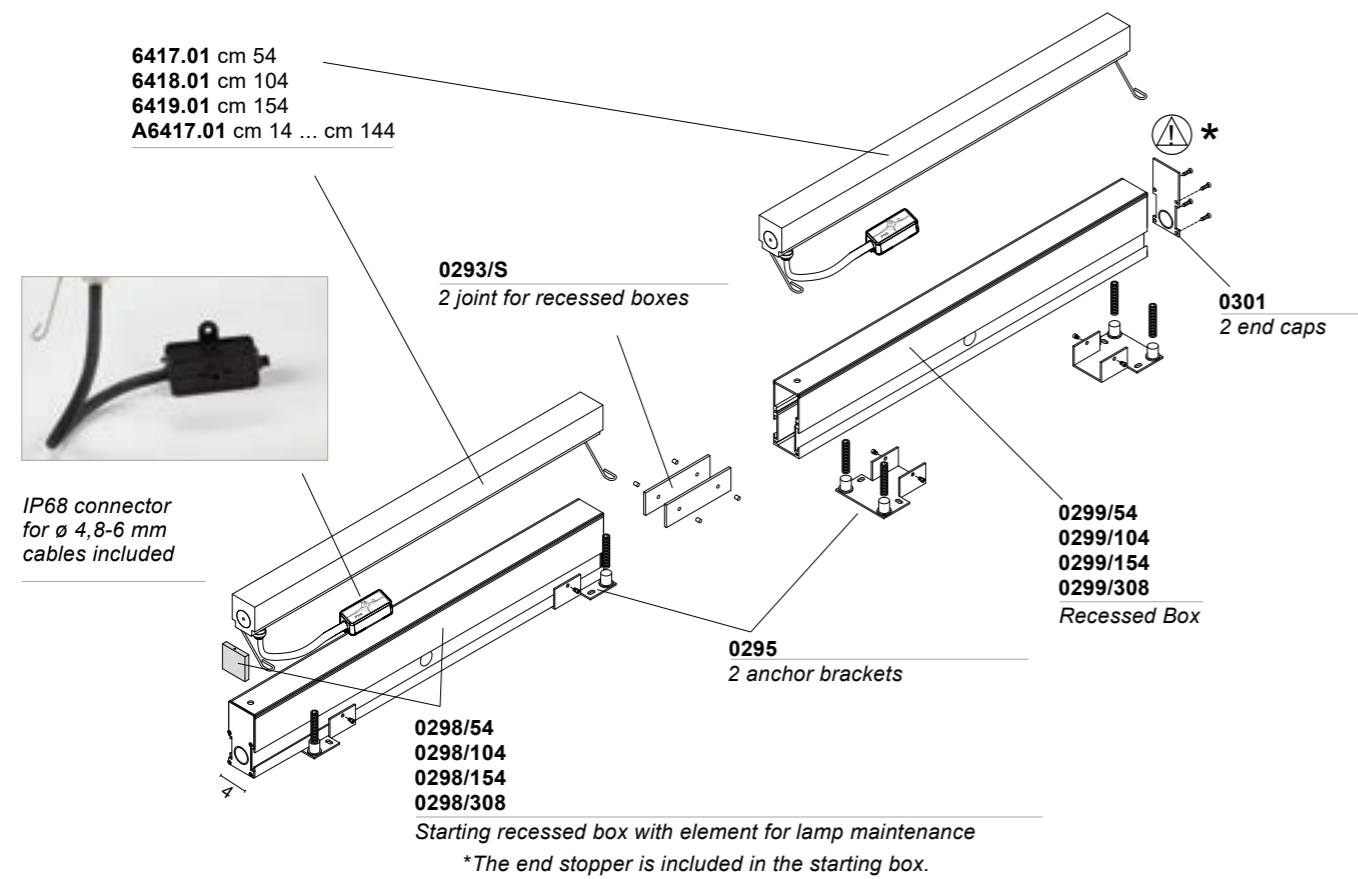

ACCESSORIES



Element  
**0298**  
Starting recessed box with caps and element for lamp maintenance.

/54	55,1 X 4 X 9 cm	0,9 kg
/104	105,1 X 4 X 9 cm	1,7 kg
/154	155,1 X 4 X 9 cm	2,6 kg
/308	309,1 X 4 X 9 cm	5,7 kg



Element  
**0299**  
Recessed box  
The end stoppers are included in the starting box

/54	55,1 X 4 X 9 cm	0,8 kg
/104	105,1 X 4 X 9 cm	1,6 kg
/154	155,1 X 4 X 9 cm	2,5 kg
/308	309,1 X 4 X 9 cm	5,7 kg



Element  
**0295**  
2 anchor brackets for recessed box




Element  
**0293/S**  
2 joints for recessed box



Element  
**0301**  
2 end caps for recessed box



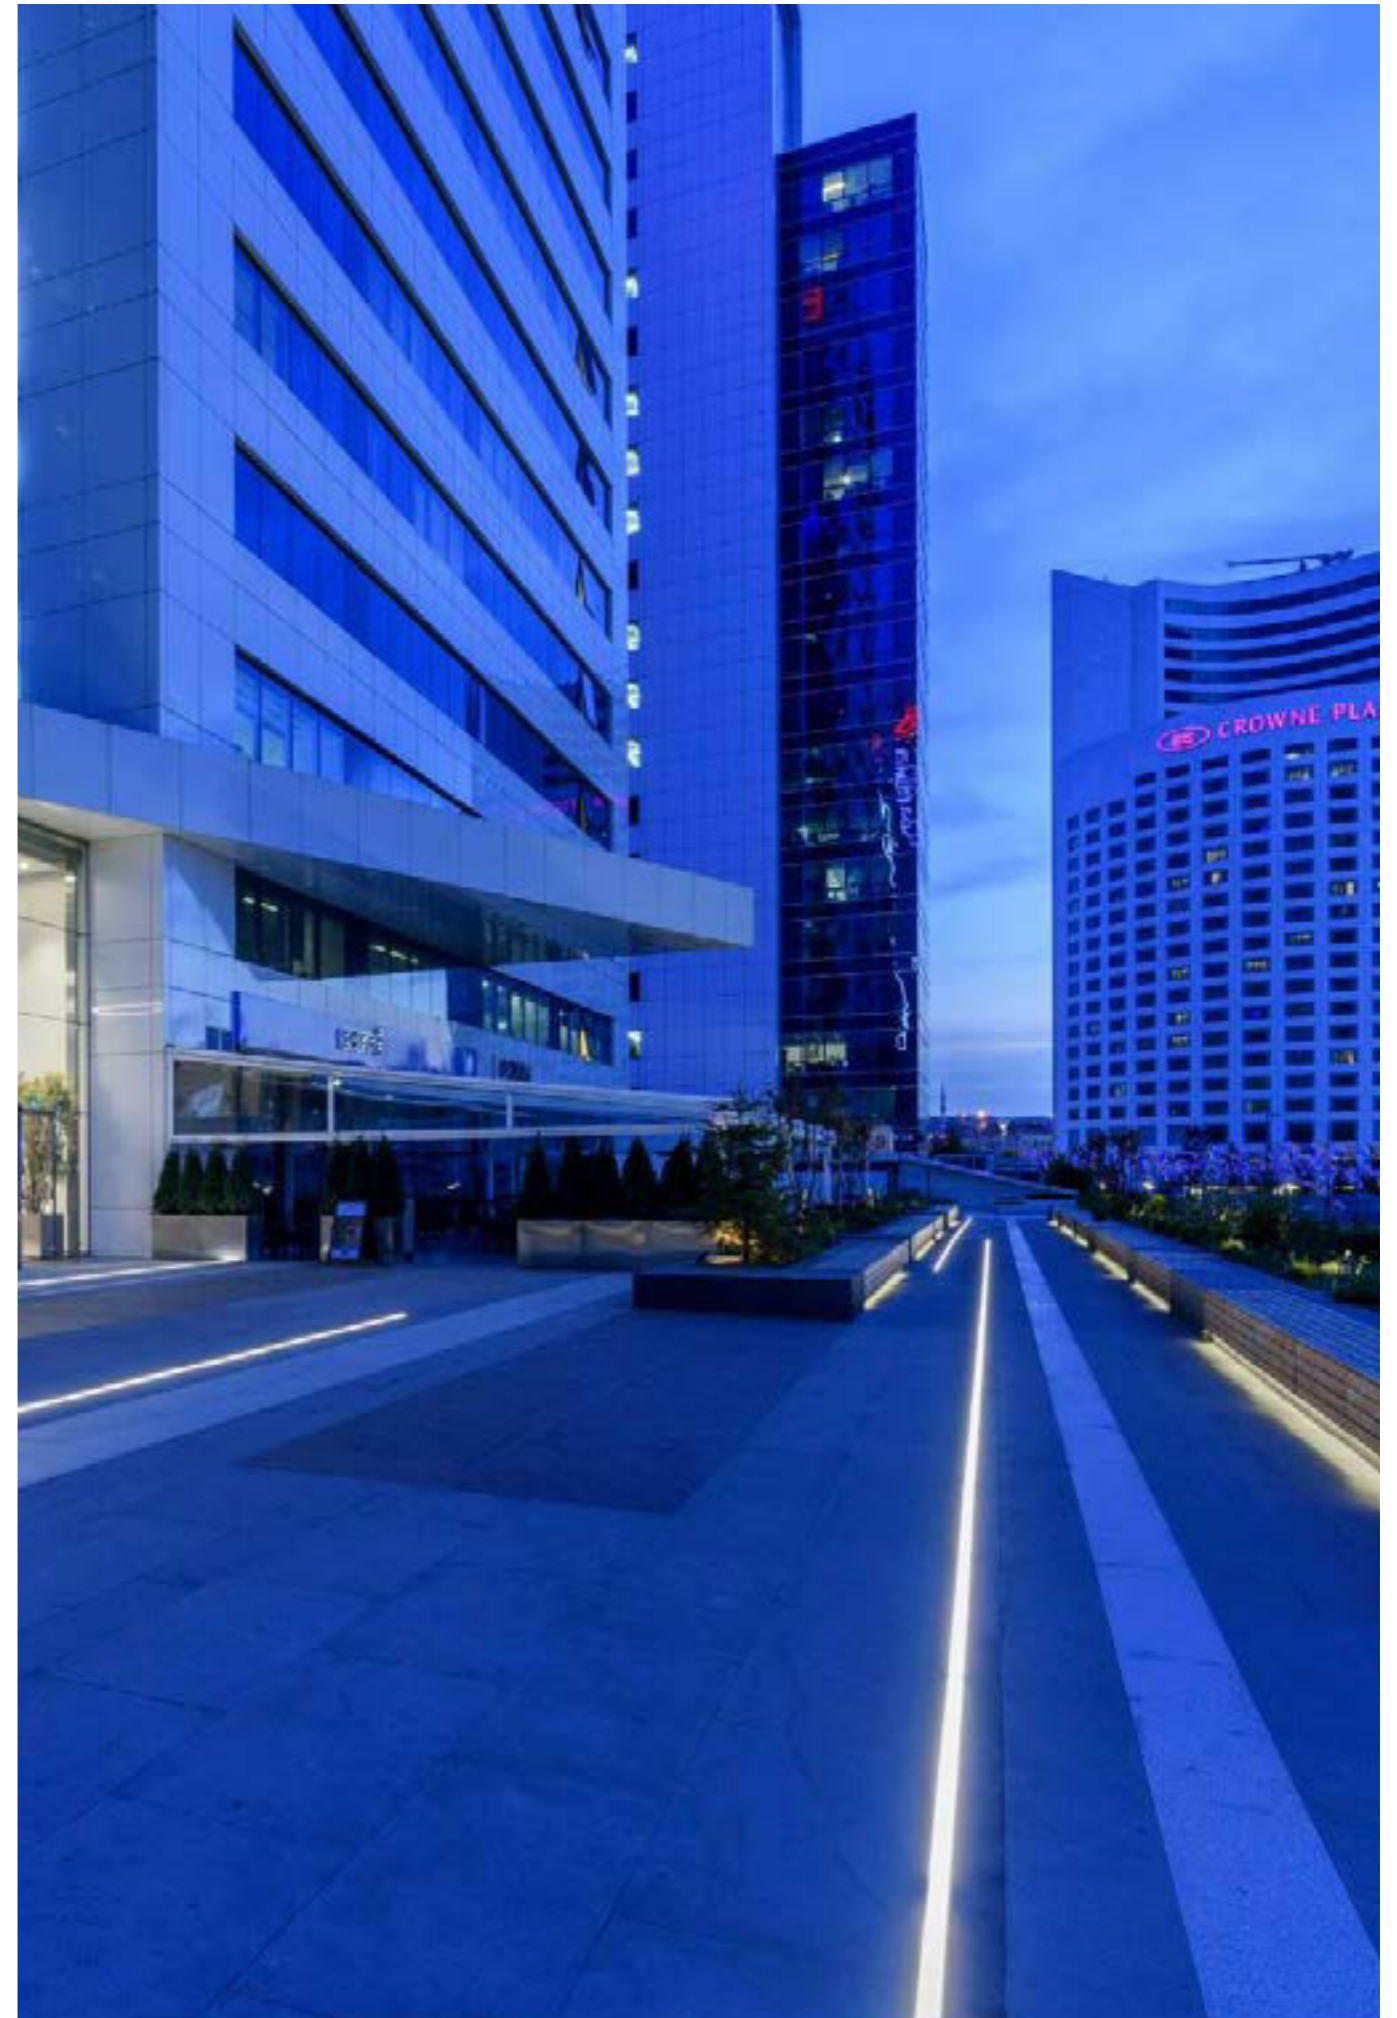









OUTDOOR


# VISION

Design U.T. EgoLuce





## VISION



Series of adjustable outdoor projectors in anodized aluminium (reinforced anodizing for outdoor) with bracket in stainless steel AISI 316L. Supplied with neoprene cable.




To be installed on tile, pavements, walls, ceiling or temporary positioning on soft ground.

*Serie di proiettori orientabili per esterni in alluminio anodizzato (anodizzazione rinforzata per esterni) con staffa in acciaio inox AISI 316L. Forniti con cavo in neoprene. Da installare su piastrelle, marciapiedi, pareti, soffitto o da posizionare temporaneamente su terreni morbidi.*

*Serie von verstellbaren Außenprojektoren aus eloxiertem Aluminium (verstärkte Eloxierung für den Außenbereich) mit Halterung aus rostfreiem Stahl AISI 316L. Geliefert mit Neoprenkabel. Zur Installation auf Fliesen, Gehwegen, Wänden, Decken oder zur vorübergehenden Aufstellung auf weichem Untergrund.*



# VISION 1



**4529**

0,20 Kg

<b>.34</b>	Painted Corten	■
<b>.39</b>	Painted Anthracite	■
<b>.45</b>	Anodized Aluminium	■

<b>/W</b>	4000K	/11	/25	/45	LED 1,5W 500mA	180lm
<b>/WW</b>	3000K	/11	/25	/45	LED 1,5W 500mA	162lm
<b>/XW</b>	2700K	/11	/25	/45	LED 1,5W 500mA	153lm



## ACCESSORIES

Kit  
**0247**

Stake for temporary ground installation




Connector  
**0243**


IP Connector



## FINISHES CODES

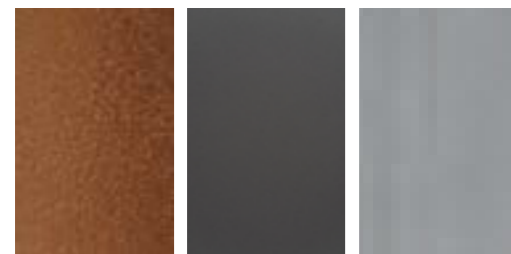

**.39** Painted Corten    **.39** Painted Anthracite    **.45** Anodized Aluminium

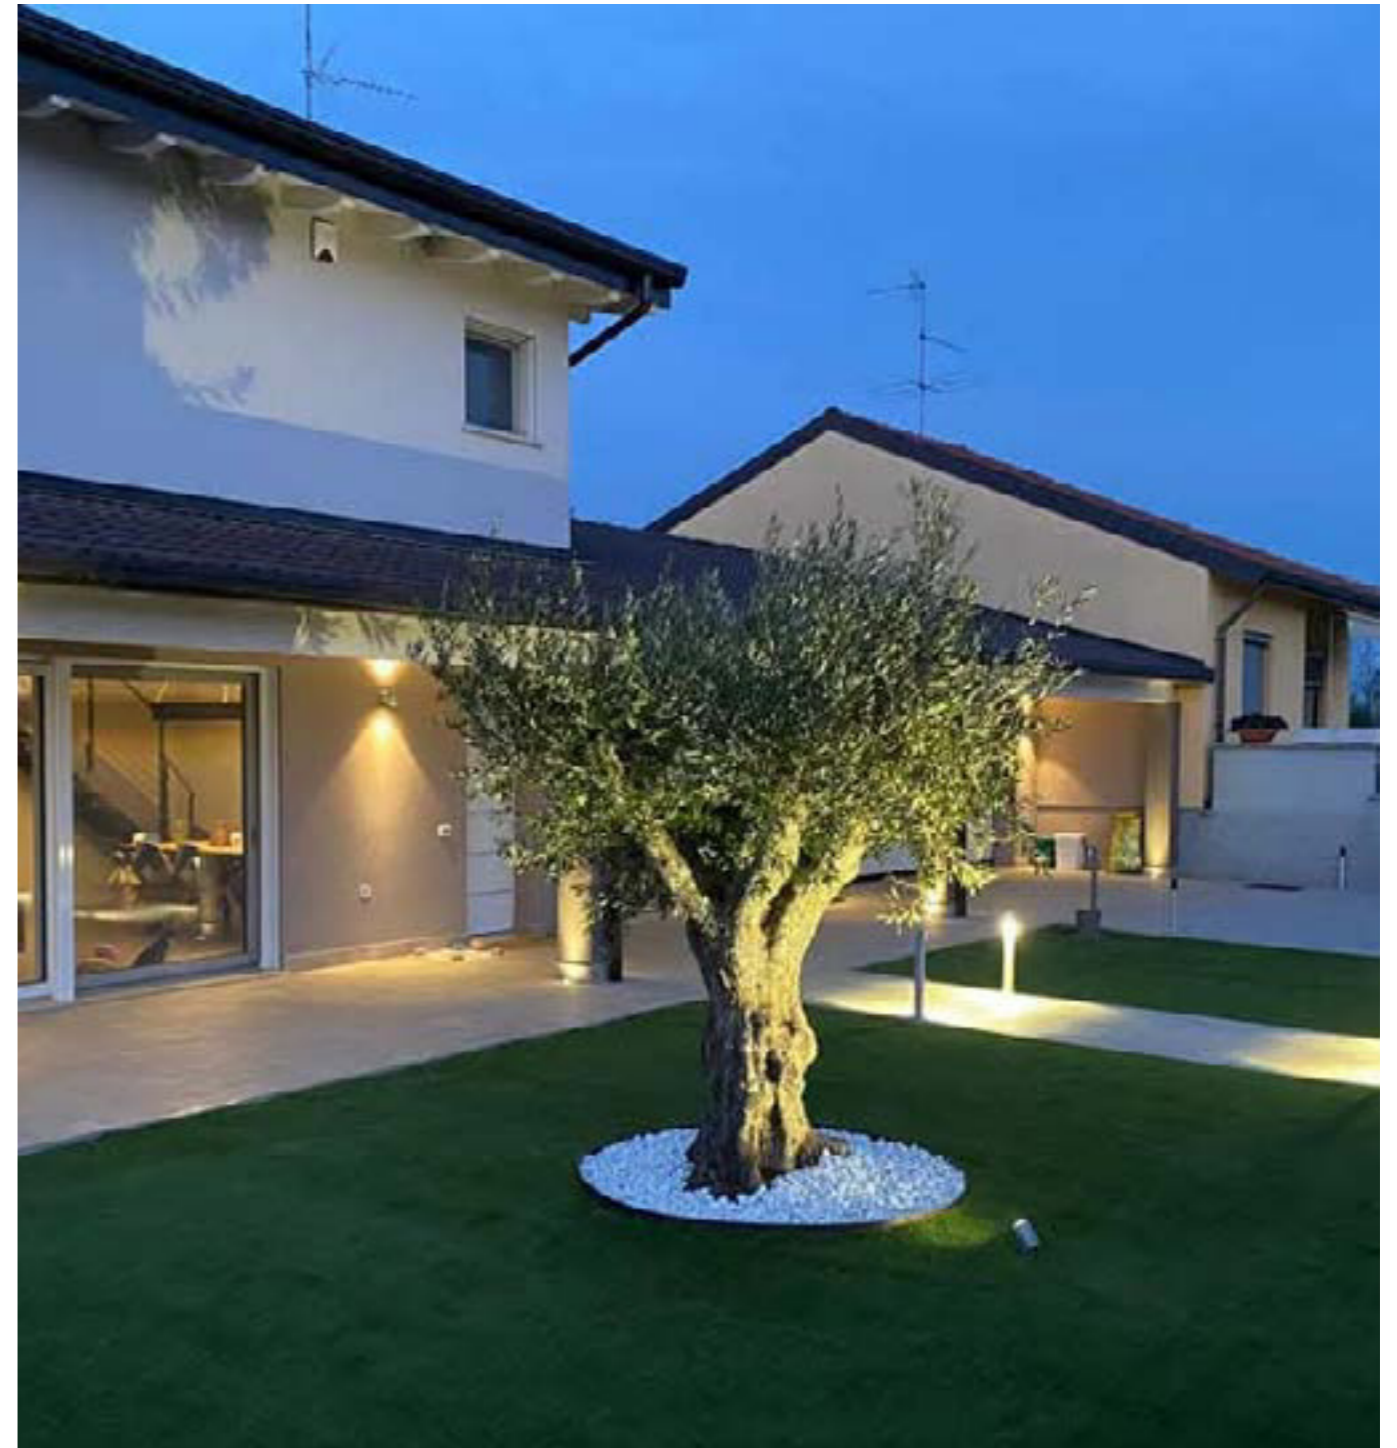

## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA	0127 500mA
<b>4529</b>	1-6	1-10	1-6

### IP67 DRIVER



Cod.	0031/IP 350mA	0143/IP 500mA
<b>4529</b>	1-12	1-7

### DIMMABLE

Cod.	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
<b>4529</b>	2-11	2-11	1-21	1-21

Only serial connection

# VISION 2

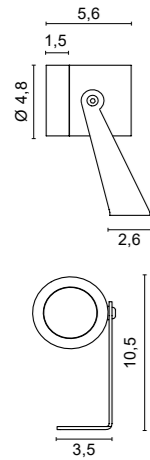

**4530**

0,35 Kg

<b>.34</b>	Painted Corten	
<b>.39</b>	Painted Anthracite	
<b>.45</b>	Anodized Aluminium	
<b>/W</b>	4000K /18 /40 /60	LED 5,9W 350mA 885lm
<b>/WW</b>	3000K /18 /40 /60	LED 5,9W 350mA 836lm
<b>/XW</b>	2700K /18 /40 /60	LED 5,9W 350mA 800lm



## ACCESSORIES

Kit  
**0247**

Stake for temporary ground installation




Connector  
**0243**

IP Connector



## FINISHES CODES

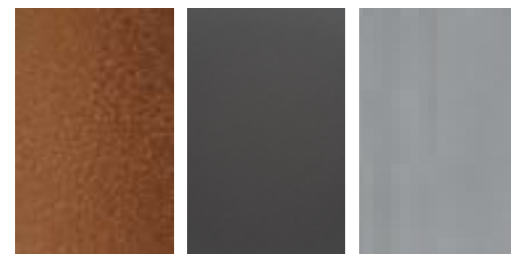

**.39** Painted Corten  
**.39** Painted Anthracite  
**.45** Anodized Aluminium



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA	0127 500mA	0147/COB 500mA
<b>4530</b>	1	1-2	1-2	1-2

### IP67 DRIVER



Cod.	0031/IP 350mA
<b>4530</b>	1

### DIMMABLE

Cod.	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
<b>4530</b>	1-2	1-2	1-3	1-3

Only serial connection

# VISION 3

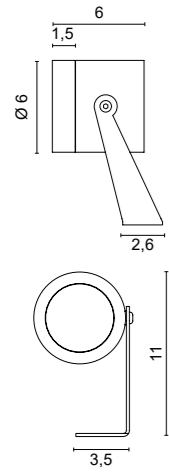

<b>4531</b>						0,50 Kg
<b>.34</b>	Painted Corten					
<b>.39</b>	Painted Anthracite					
<b>.45</b>	Anodized Aluminium					
<b>/W</b>	4000K	/15	/28	/60	LED 8,7W 500mA	1223lm
<b>/WW</b>	3000K	/15	/28	/60	LED 8,7W 500mA	1156lm
<b>/XW</b>	2700K	/15	/28	/60	LED 8,7W 500mA	1106lm

## ACCESSORIES

Kit  
**0247**  
Stake for temporary  
ground installation




Connector  
**0243**

IP Connector



## FINISHES CODES

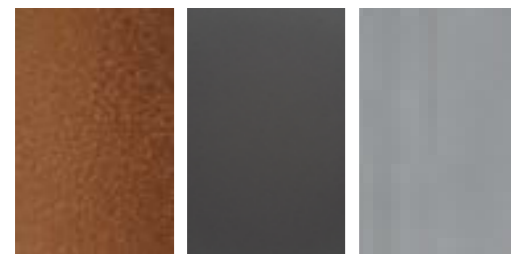

**.39** Painted Corten  
**.39** Painted Anthracite  
**.45** Anodized Aluminium



## DRIVERS

### ON/OFF

Cod.	0149/COB 500mA
<b>4531</b>	1

### DIMMABLE

Cod.	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
<b>4531</b>	1-2	1-2	1-3	1-3

Only serial connection

### IP67 DRIVER

Cod.	0143/IP 500mA
<b>4531</b>	1

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR	
<b>4531</b>	1





INDOOR / OUTDOOR

# SPILLO

Design officinadiarchitettura&design





## SPILLO



IP67 floor lamp providing diffused light with an AISI 316L steel structure and a transparent coextruded UV-resistant methacrylate diffuser.

Light is emitted 360° along the entire length of the diffuser.

Accessories for the installation of SPILLO such as the box plate with steel screws, the IP connector for cables with a diameter of less than 7.0 mm, the stakes for temporary ground installation and the base cover must be ordered separately.

*Lampada da terra IP67 a luce diffusa con struttura in acciaio AISI 316L e diffusore in metacrilato trasparente coestruso resistente ai raggi UV.*

*La luce viene emessa a 360° su tutta la lunghezza del diffusore.*

*Gli accessori per l'installazione di SPILLO, come la piastra di contenimento con viti in acciaio, il connettore IP per cavi di diametro inferiore a 7,0 mm, i picchetti per l'installazione temporanea a terra e il coperchio della base, devono essere ordinati separatamente.*


Stehleuchte IP67 für diffuses Licht mit einer Struktur aus Stahl AISI 316L und einem transparenten, koextrudierten Diffusor aus UV-beständigem Methacrylat.

Der Lichtaustritt erfolgt um 360° über die gesamte Länge des Schirms.

Das Zubehör für die Installation von SPILLO, wie z.B. die Kastenplatte mit Stahlschrauben, der IP-Anschluss für Kabel mit einem Durchmesser von weniger als 7,0 mm, die Pflöcke für die vorübergehende Bodeninstallation und die Sockelabdeckung, muss separat bestellt werden.




# SPILLO

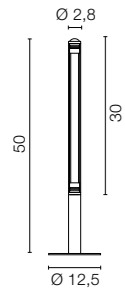

**3542** 0,60Kg

- .33** Matt Steel INOX AISI 316L ■
- .34** Painted corten finishing ■

<b>/W</b>	4000K	LED 24V 6W	650lm
<b>/WW</b>	3000K	LED 24V 6W	576lm
<b>/XW</b>	2700K	LED 24V 3W	520lm

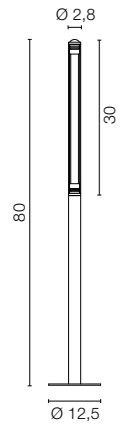


**3543** 0,90 Kg

- .33** Matt Steel INOX AISI 316L ■
- .34** Painted corten finishing ■

<b>/W</b>	4000K	LED 24V 6W	650lm
<b>/WW</b>	3000K	LED 24V 6W	576lm
<b>/XW</b>	2700K	LED 24V 3W	520lm



## FINISHES CODES



- .33** Stainless Steel AISI 316L
- .34** Painted Corten Finishing



# SPILLO



## ACCESSORIES

Kit  
**0246/R**

Draining formwork  
with plate



Box  
**0243**

IP Connector on  
cable



Box  
**0245**

Stakes for temporary  
installation on field



Box  
**0252/S.33**

Basecover



## DRIVERS

### ON/OFF

Cod.	<b>0155</b>	<b>0156</b>	<b>0157</b>	<b>0160</b>
	24V-13W	24V-25W	24V-75W	24V-60W

### IP67 DRIVER


Cod.	<b>0033/IP</b>	<b>0034/IP</b>
	24V 14,4W	24V 70W




INDOOR / OUTDOOR

# RACCORDI DI LUCE JOY

Design officinadiarchitettura&design



## RACCORDI DI LUCE - JOY



Collection of IP65 direct light system, wall, ceiling, and floor lamps, for both outdoor and indoor use, with structure in 304 stainless steel and aluminum with reinforced anodizing for outdoor use or, in the satin steel finish, in AISI 316L stainless steel.

The system is a new and different way of interpreting light: starting from a single power supply point, the modularity of the various elements allows for the creation of multiple configurations bringing the light wherever it is needed.

*Collezione di lampade a luce diretta IP65, a parete, a soffitto e a terra, per esterni e interni, con struttura in acciaio inox 304 e alluminio con anodizzazione rinforzata per esterni o, nella finitura acciaio satinato, in acciaio inox AISI 316L.*



*Il sistema è un modo nuovo e diverso di interpretare la luce: partendo da un unico punto di alimentazione, la modularità dei vari elementi permette di creare molteplici configurazioni portando la luce ovunque sia necessaria.*

*Kollektion von IP65-Direktbeleuchtungssystemen, Wand-, Decken- und Stehlampen, sowohl für den Außen- als auch für den Innenbereich, mit Strukturen aus Edelstahl 304 und Aluminium mit verstärkter Eloxierung für den Außenbereich oder, in der Ausführung aus satiniertem Stahl, aus Edelstahl AISI 316L.*

*Das System ist eine neue und andere Art, Licht zu interpretieren: Ausgehend von einem einzigen Stromanschluss, ermöglicht die Modularität der verschiedenen Elemente die Schaffung von mehreren Konfigurationen, die das Licht dorthin bringen, wo es benötigt wird.*



# RACCORDI DI LUCE - JOY

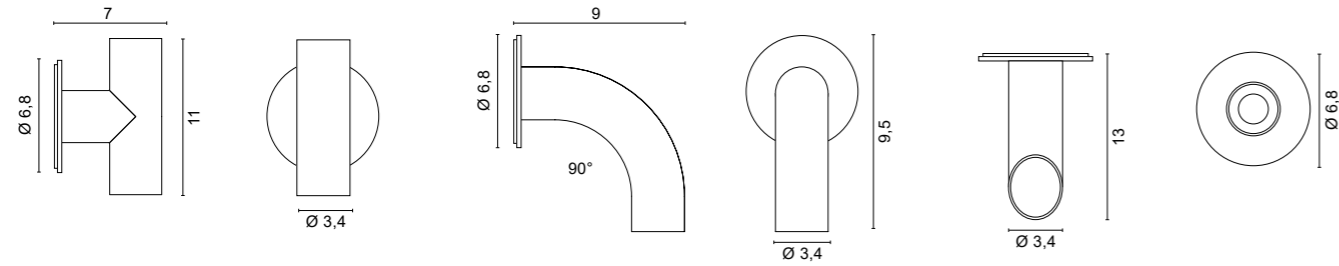

4672		0,31 Kg		4673		0,25 Kg		5690		0,20 Kg	
.01	White	■		.01	White	■		.01	White	■	
.02	Black	■		.02	Black	■		.02	Black	■	
.33	Stainless Steel AISI 316L	■		.33	Stainless Steel AISI 316L	■		.33	Stainless Steel AISI 316L	■	
.34	Painted Corten	■		.34	Painted Corten	■		.34	Painted Corten	■	
/W	4000K LED 3W 500mA		360lm	/W	4000K LED 1,5W 500mA		180lm	/W	4000K LED 1,5W 500mA		180lm
/WW	3000K LED 3W 500mA		324lm	/WW	3000K LED 1,5W 500mA		162lm	/WW	3000K LED 1,5W 500mA		162lm
/XW	2700K LED 3W 500mA		306lm	/XW	2700K LED 1,5W 500mA		153lm	/XW	2700K LED 1,5W 500mA		153lm




## DRIVERS ON/OFF

Cod. LED	0143/IP 500mA	0127 500mA
4672	1-3	1-3
4673	1-7	1-6
5690	1-7	1-6


Only serial connection


## FINISHES CODES

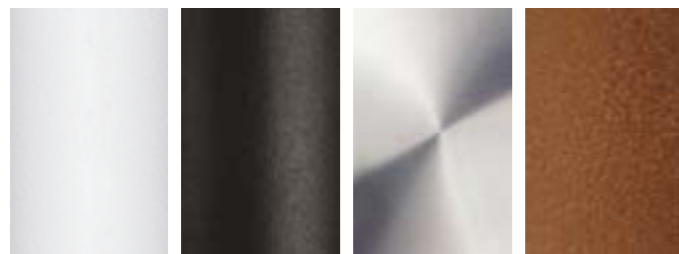


.01 White    .02 Black    .33 Stainless Steel AISI316L    .34 Painted Corten



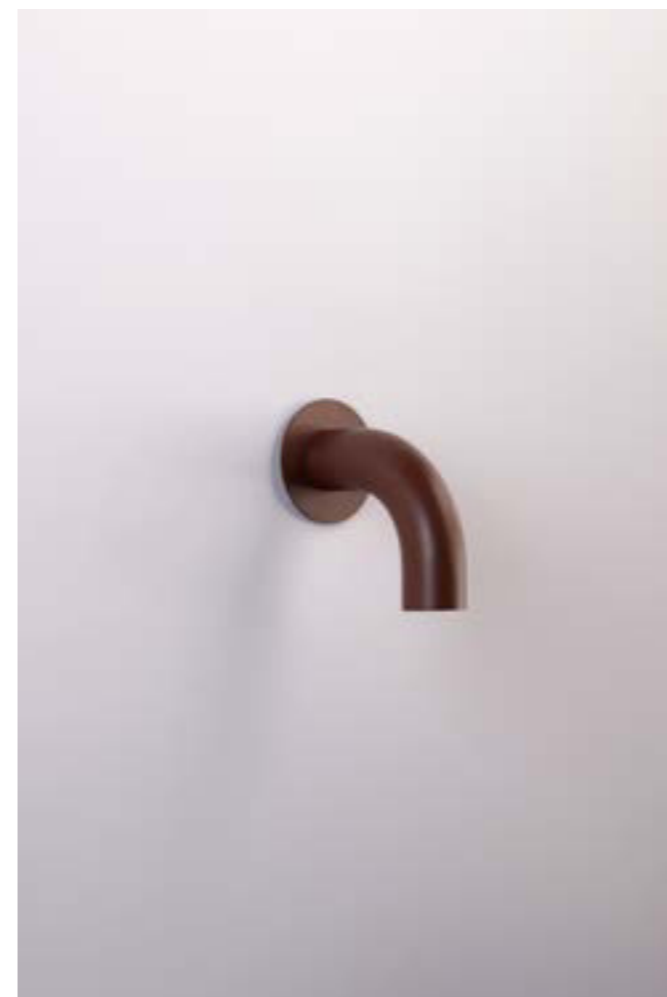

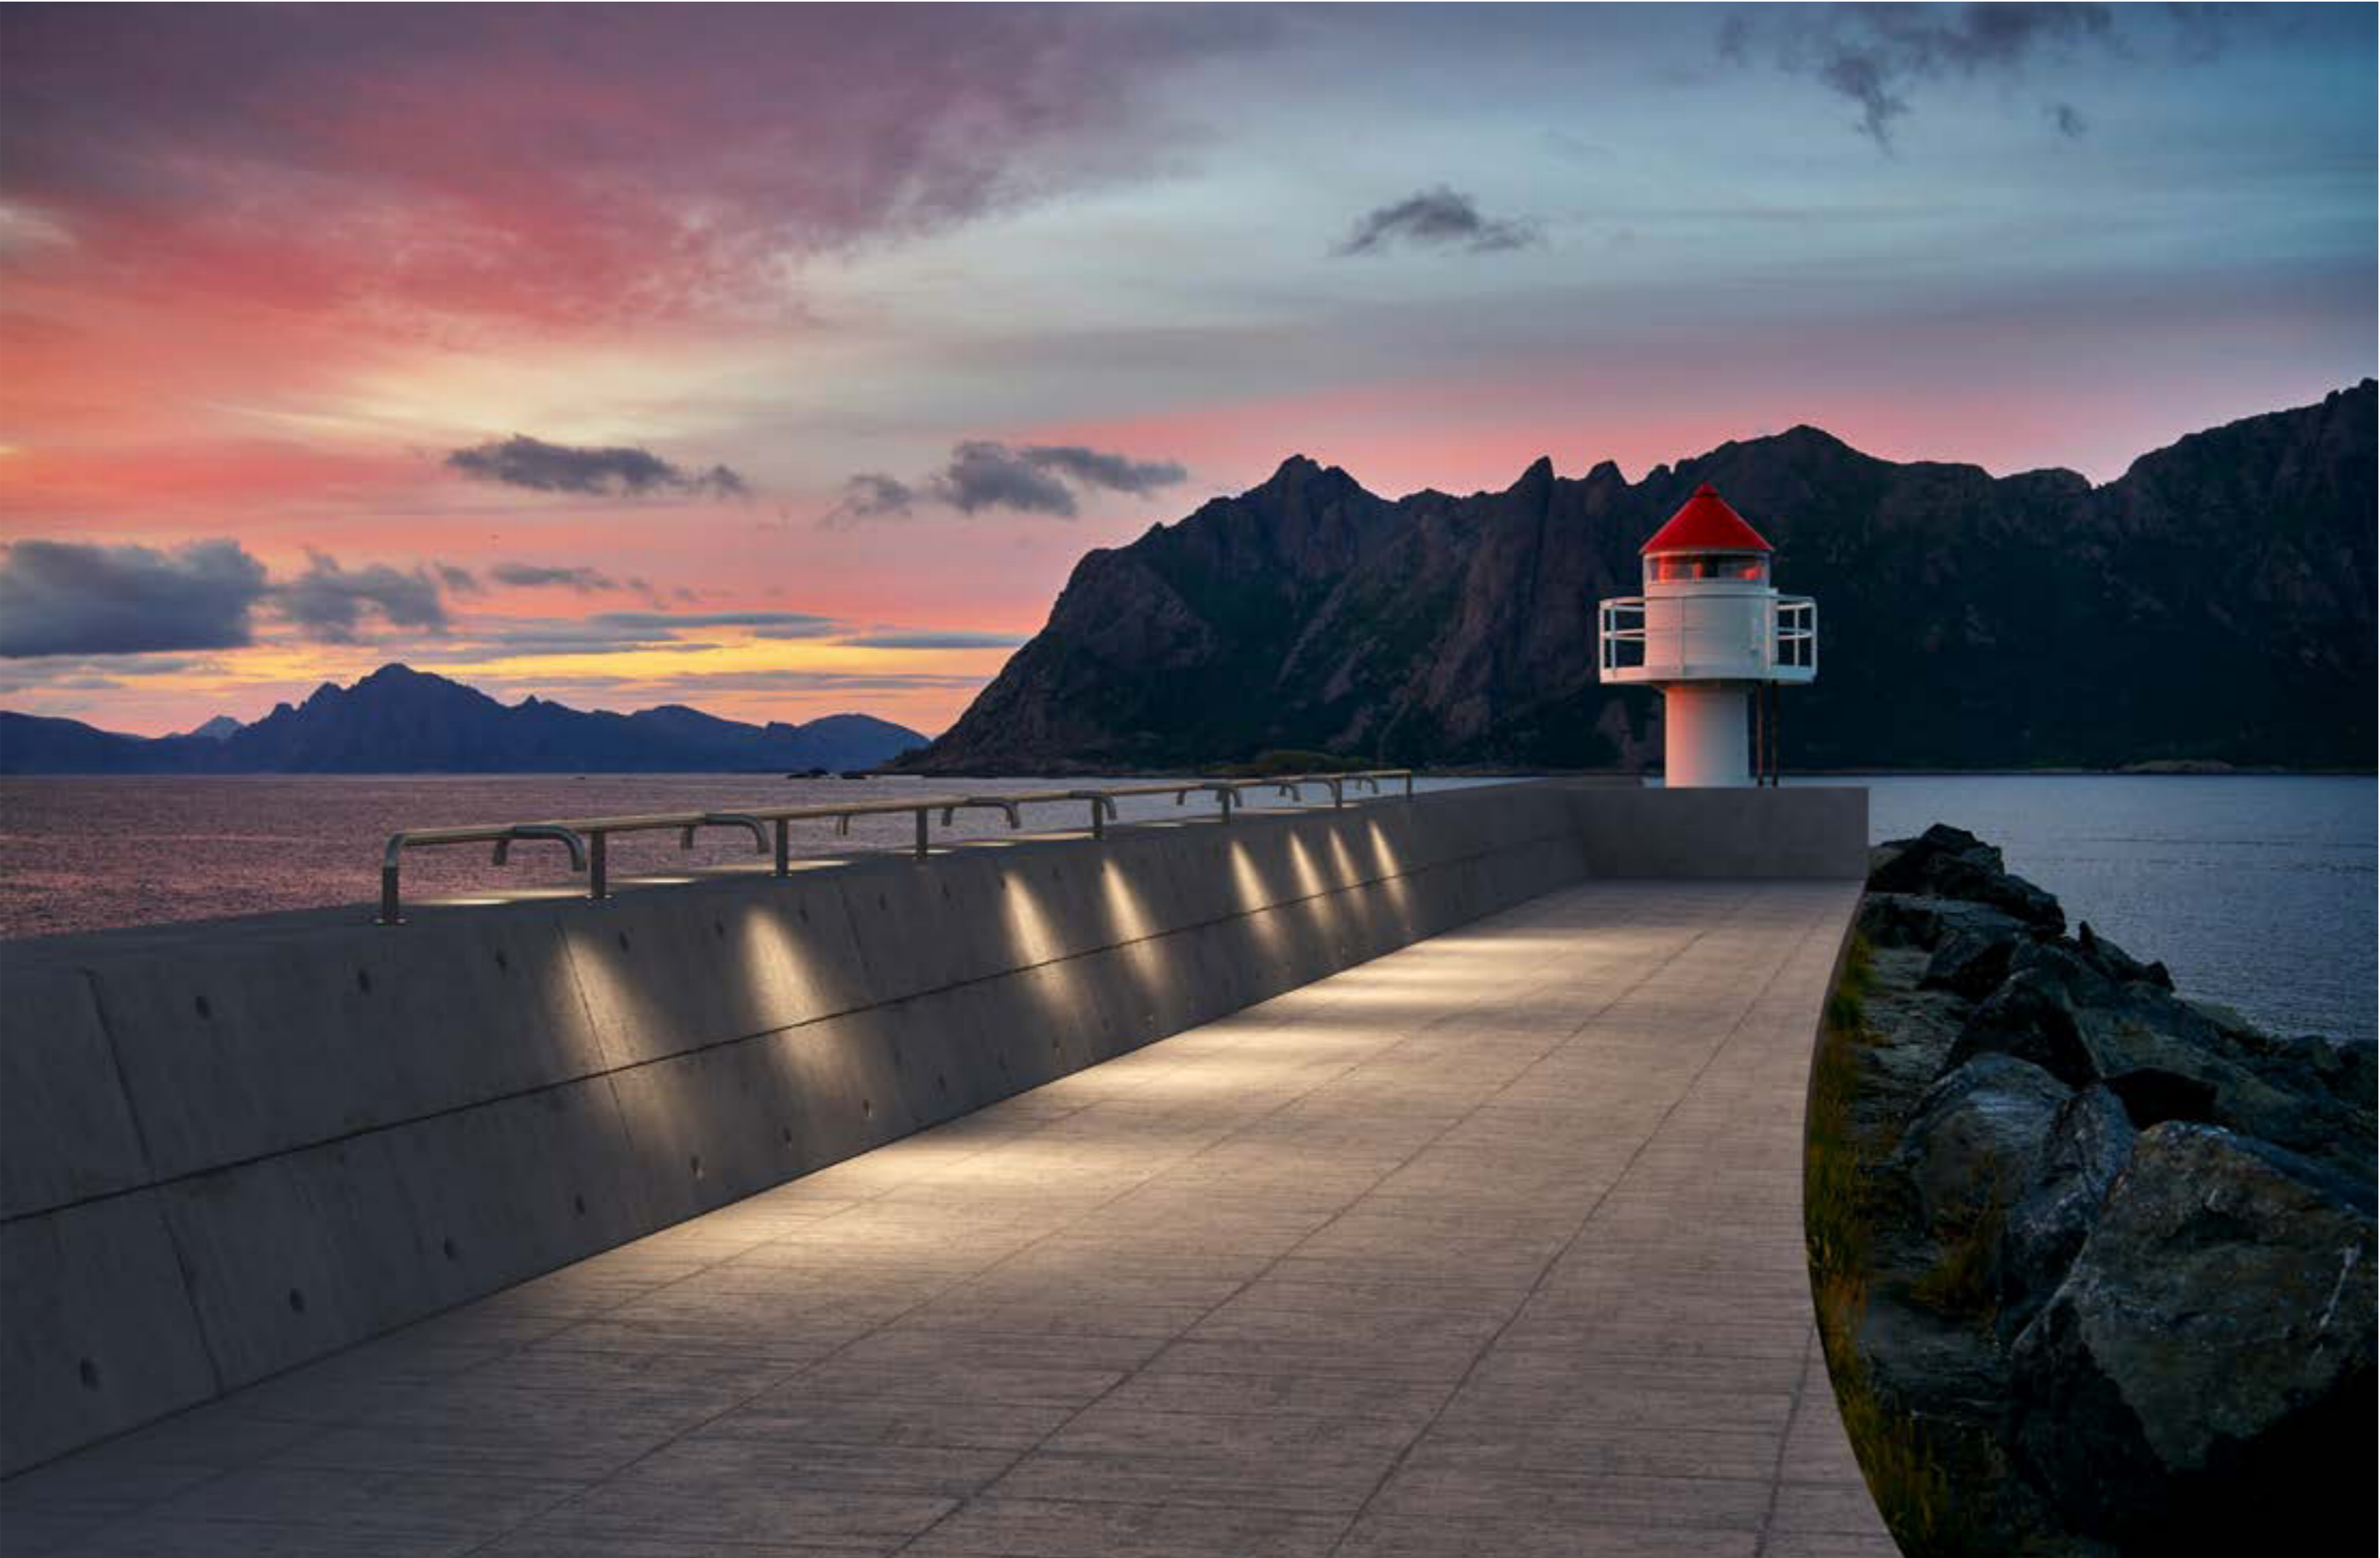

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

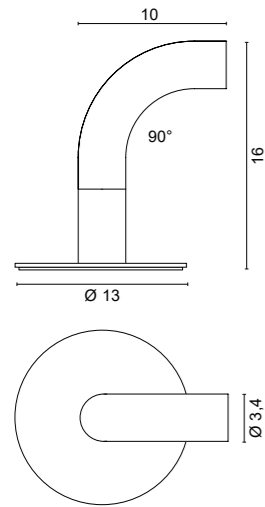

The lamps are supplied without drivers  
These are to be ordered separately and placed remotely

<b>3555</b>		0,60 Kg
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted Corten	■
<b>/W</b>	4000K LED 1,5W 500mA	180lm
<b>/WW</b>	3000K LED 1,5W 500mA	162lm
<b>/XW</b>	2700K LED 1,5W 500mA	153lm



Only Serial Connection

## ACCESSORIES

Box  
**0246/R**

Draining formwork  
with plate




Connector  
**0276**

IP67 connector  
with gel



## FINISHES CODES



**.33** Stainless Steel AISI316L **.34** Painted Corten





## DRIVERS

### ON/OFF

Cod.	0143/IP 500mA	0127 500mA
<b>3547</b>	1-7	1-6

Only serial connection

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

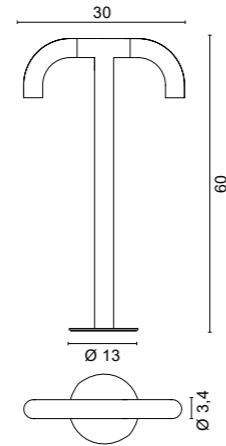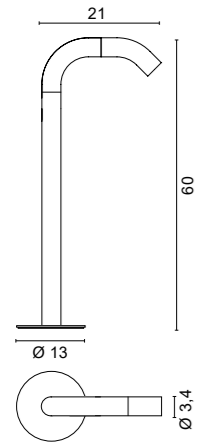

**3556** 1,50 Kg

<b>.33</b>	Stainless Steel AISI 316L	■
<b>.34</b>	Painted Corten	■
<b>/W</b>	4000K LED 1,5W 500mA	180lm
<b>/WW</b>	3000K LED 1,5W 500mA	162lm
<b>/XW</b>	2700K LED 1,5W 500mA	153lm



Only Serial Connection

**3557** 2,00 Kg


<b>.33</b>	Stainless Steel AISI 316L	■
<b>.34</b>	Painted Corten	■
<b>/W</b>	4000K LED 3W 500mA	360lm
<b>/WW</b>	3000K LED 3W 500mA	324lm
<b>/XW</b>	2700K LED 3W 500mA	306lm



Only Serial Connection



## FINISHES CODES



**.33** Stainless Steel AISI316L **.34** Painted Corten



## ACCESSORIES

Box  
**0246/R**

Draining formwork with plate



Connector  
**0276**

IP67 Connector



## DRIVERS

### ON/OFF


Cod.	0143/IP 500mA	0127 500mA
<b>3556</b>	1-6	1-7
<b>3557</b>	1-3	1-3



# RACCORDI DI LUCE SYSTEM - JOY SYSTEM


ILLUMINATOR

ELEMENTS




**7516** Illuminatori 0,08 Kg

<b>.45</b>	Anodized aluminium	
<b>/W</b>	4000K LED 1,5W 500mA	180lm
<b>/WW</b>	3000K LED 1,5W 500mA	162lm
<b>/XW</b>	2700K LED 1,5W 500mA	153lm




**7500** 90° expanding bend

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.06</b>	Green	
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted Corten	




**7501** T Joint expanding bend

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.06</b>	Green	
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted Corten	




**7504** 45° expanding bend

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.06</b>	Green	
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted Corten	



**7505** Joint with 45° cut

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.06</b>	Green	
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted Corten	



**7508** Linear tube

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.06</b>	Green	
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted Corten	

**/20** 20cm  
**/50** 50cm  
**/100** 100cm  
**/150** 150cm



## DRIVERS


### ON/OFF

Cod.	0143/IP	0127
	500mA	500mA
<b>7516</b>	1-7	1-6

Only serial connection




## FINISHES CODES

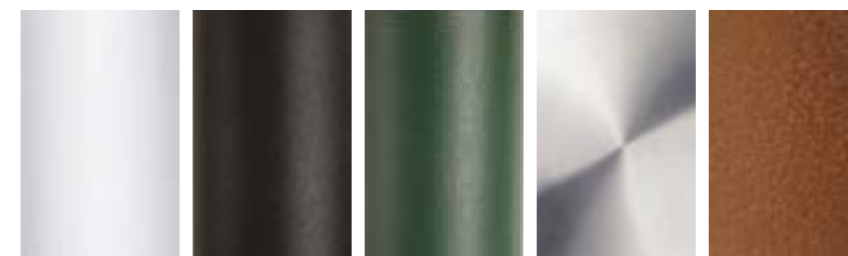

**.01** White **.02** Black **.06** Green **.33** Stainless Steel AISI316L **.34** Painted Corten

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

## ACCESSORIES



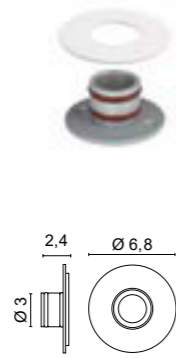


**7510** Junction element  
 .02 Black

**7521** Aluminium wall base with cover disk  
 .01 White  
 .02 Black  
 .06 Green  
 .33 Stainless Steel AISI 316L  
 .34 Painted Corten

**7522** Base with cover disk  
 .01 White  
 .02 Black  
 .06 Green  
 .33 Stainless Steel AISI 316L  
 .34 Painted Corten



## BOX & CONNECTORS



**0213** Box + Perforated plaster

**0216** Plastic box

**0228/R** Draining junction box




**0246/R** Draining formwork with plate

**0276** IP67 Connector









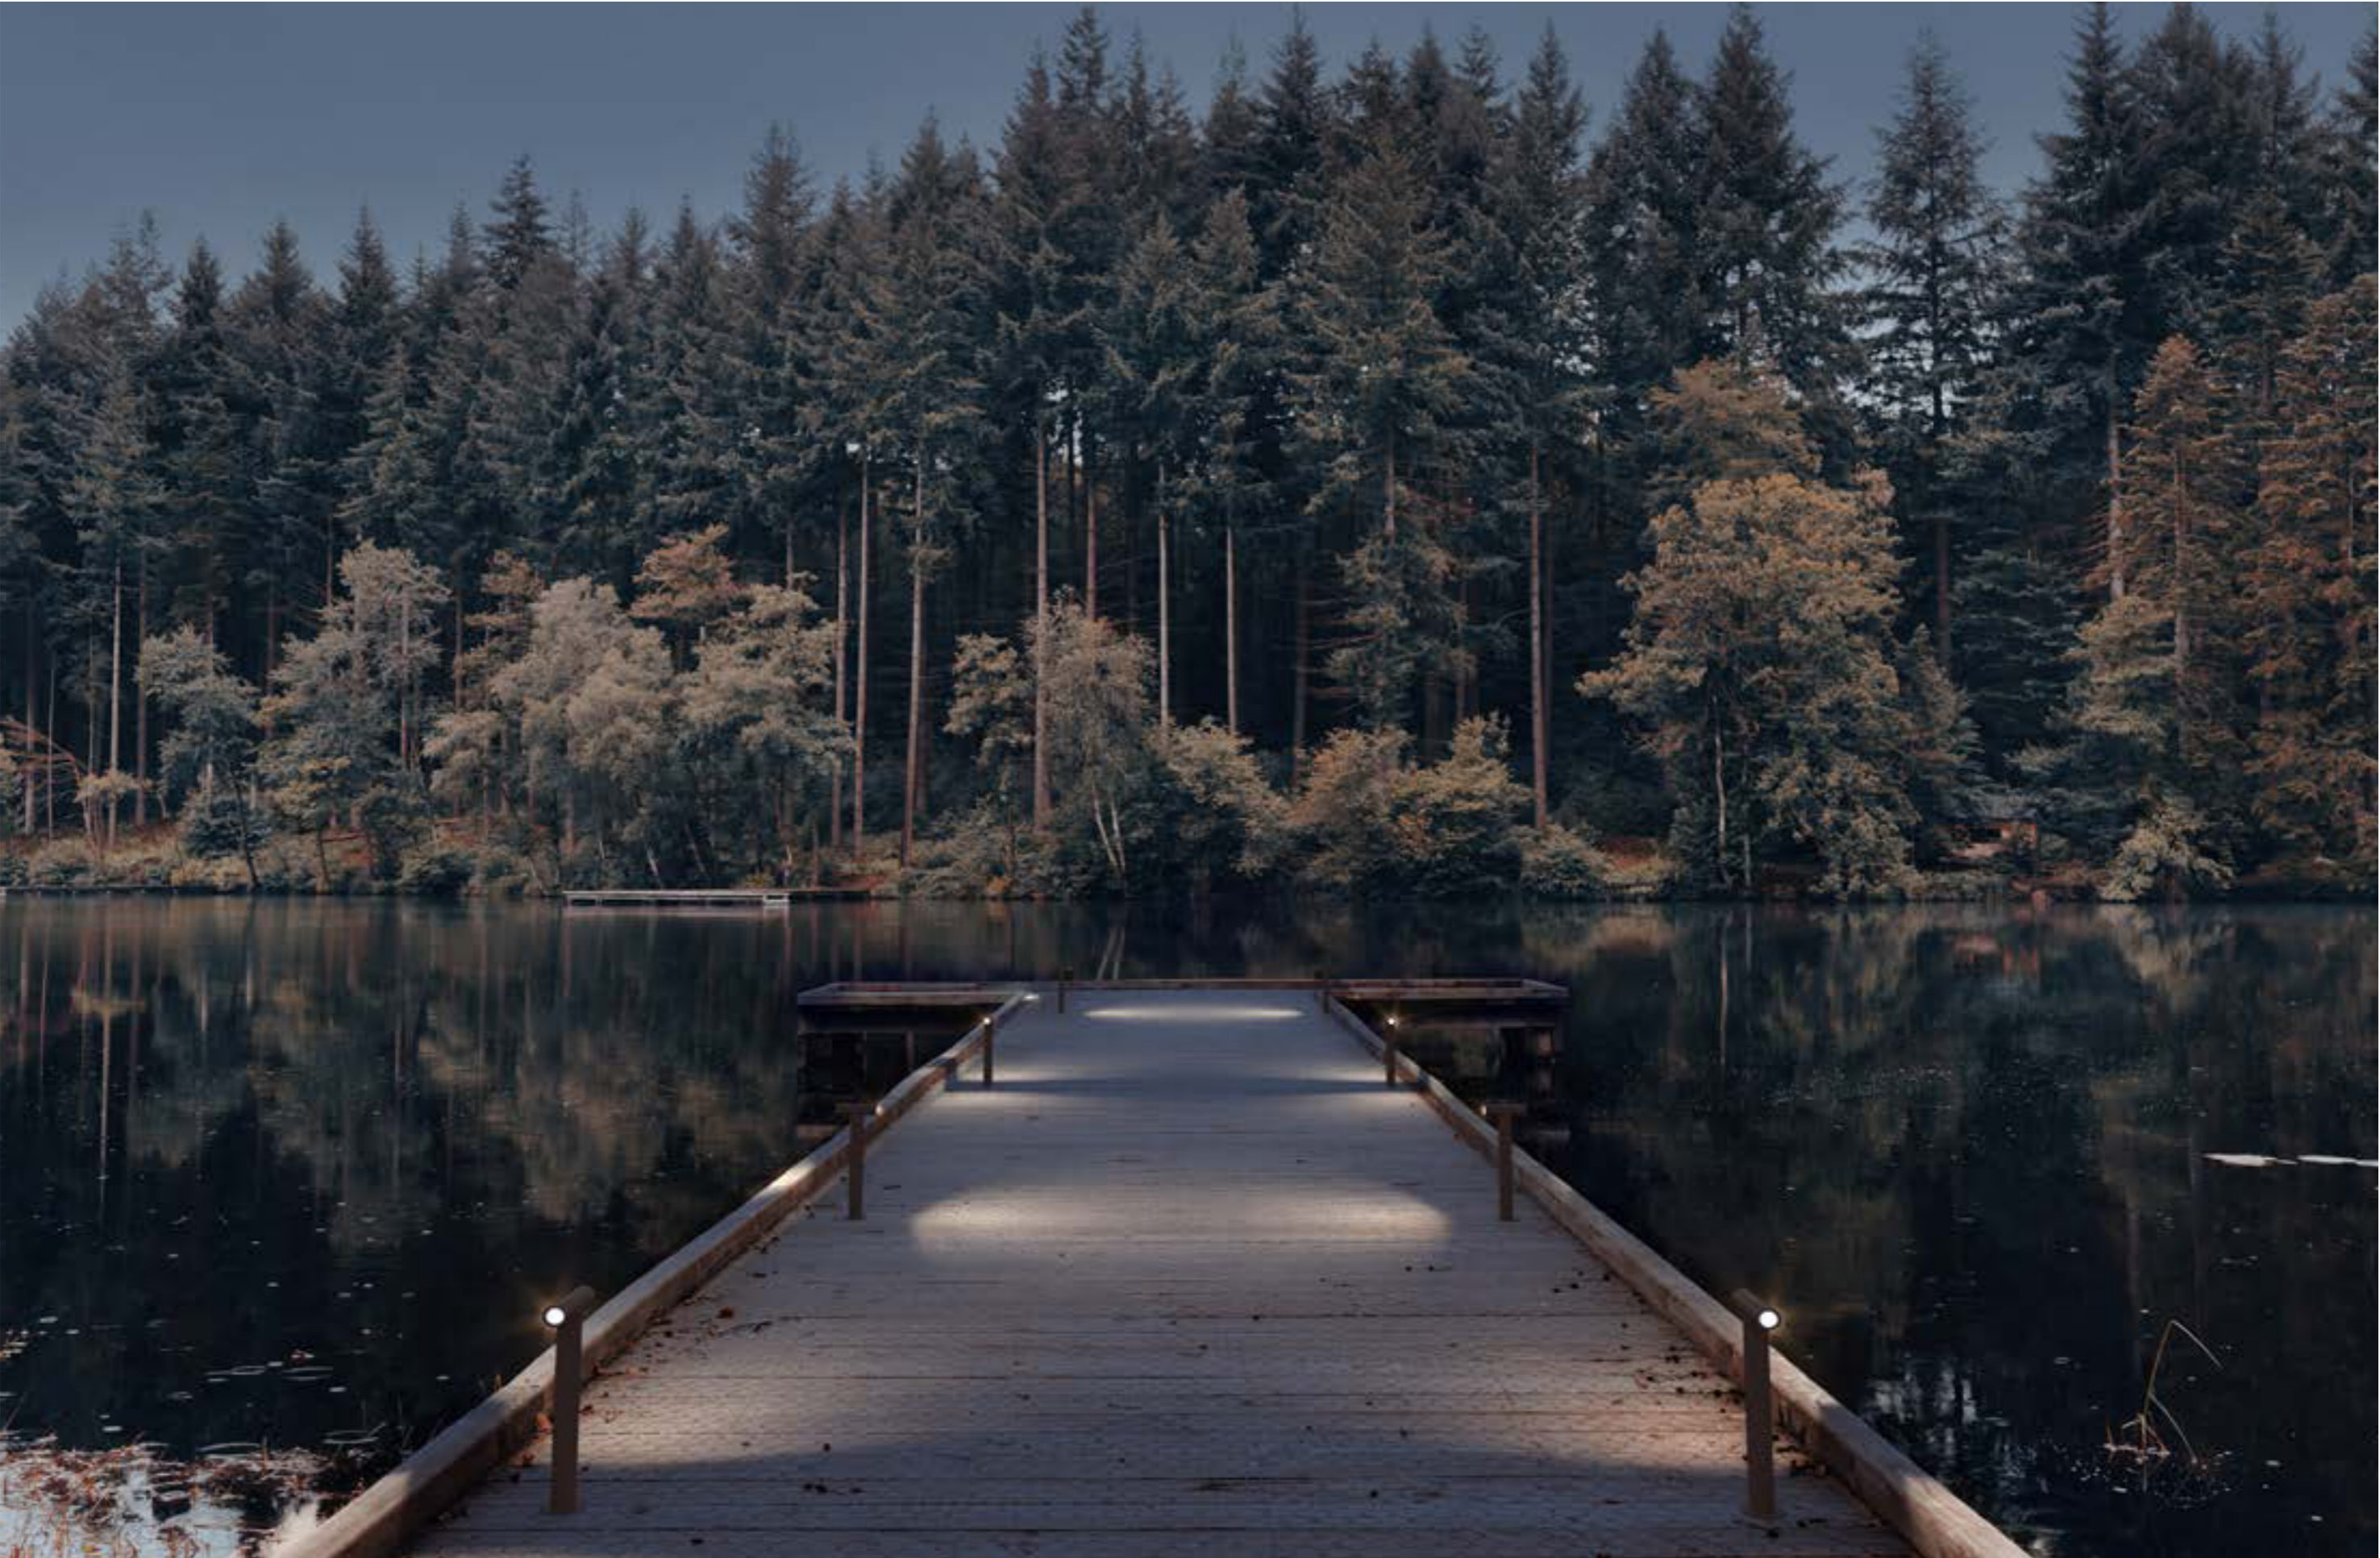

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

EXAMPLES OF MULTIPLE CONFIGURATION

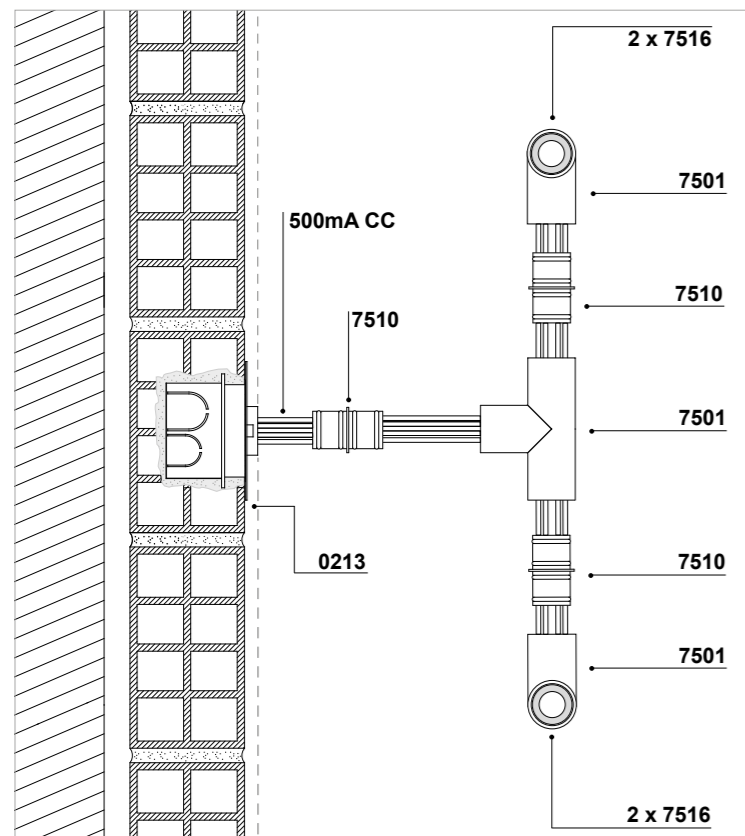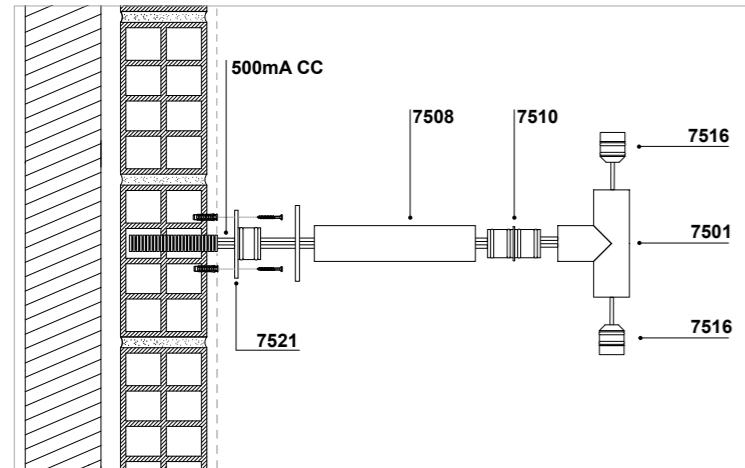





OUTDOOR

# TRILLI

Design Mati



## TRILLI



IP67 floor lamp providing diffused light with natural copper stem and crystal diffuser. It can be installed with a single or multiple lamp base or with a spike.



Accessories, and the driver to be remotely positioned, are to be ordered separately.

*Lampada da terra IP67 a luce diffusa con stelo in rame naturale e diffusore in cristallo. Può essere installata con una base a lampada singola o multipla o con un picchetto. Gli accessori e il driver da posizionare a distanza sono da ordinare separatamente.*

*Stehleuchte IP67 mit diffusem Licht, Stiel aus natürlichem Kupfer und Kristalldiffusor. Sie kann mit einem einzelnen oder mehreren Lampensockeln oder mit einem Erdspieß installiert werden. Das Zubehör und das Driver für die entfernte Positionierung sind separat zu bestellen.*




# TRILLI

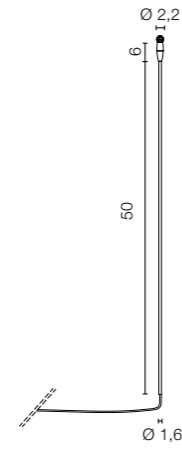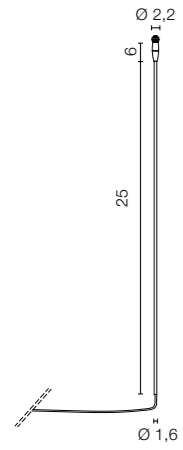


**3547** 0,15 Kg

<b>.38</b>	Shiny Copper	
<b>/W</b>	4000K LED 1W 350mA	129lm
<b>/WW</b>	3000K LED 1W 350mA	117lm
<b>/XW</b>	2700K LED 1W 350mA	110lm




Moldable and adjustable

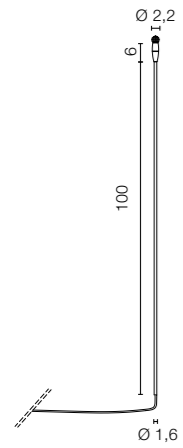

**3549** 0,40 Kg


<b>.38</b>	Shiny Copper	
<b>/W</b>	4000K LED 1W 350mA	129lm
<b>/WW</b>	3000K LED 1W 350mA	117lm
<b>/XW</b>	2700K LED 1W 350mA	110lm




Moldable and adjustable

**3548** 0,25 Kg

<b>.38</b>	Shiny Copper	
<b>/W</b>	4000K LED 1W 350mA	129lm
<b>/WW</b>	3000K LED 1W 350mA	117lm
<b>/XW</b>	2700K LED 1W 350mA	110lm



Moldable and adjustable

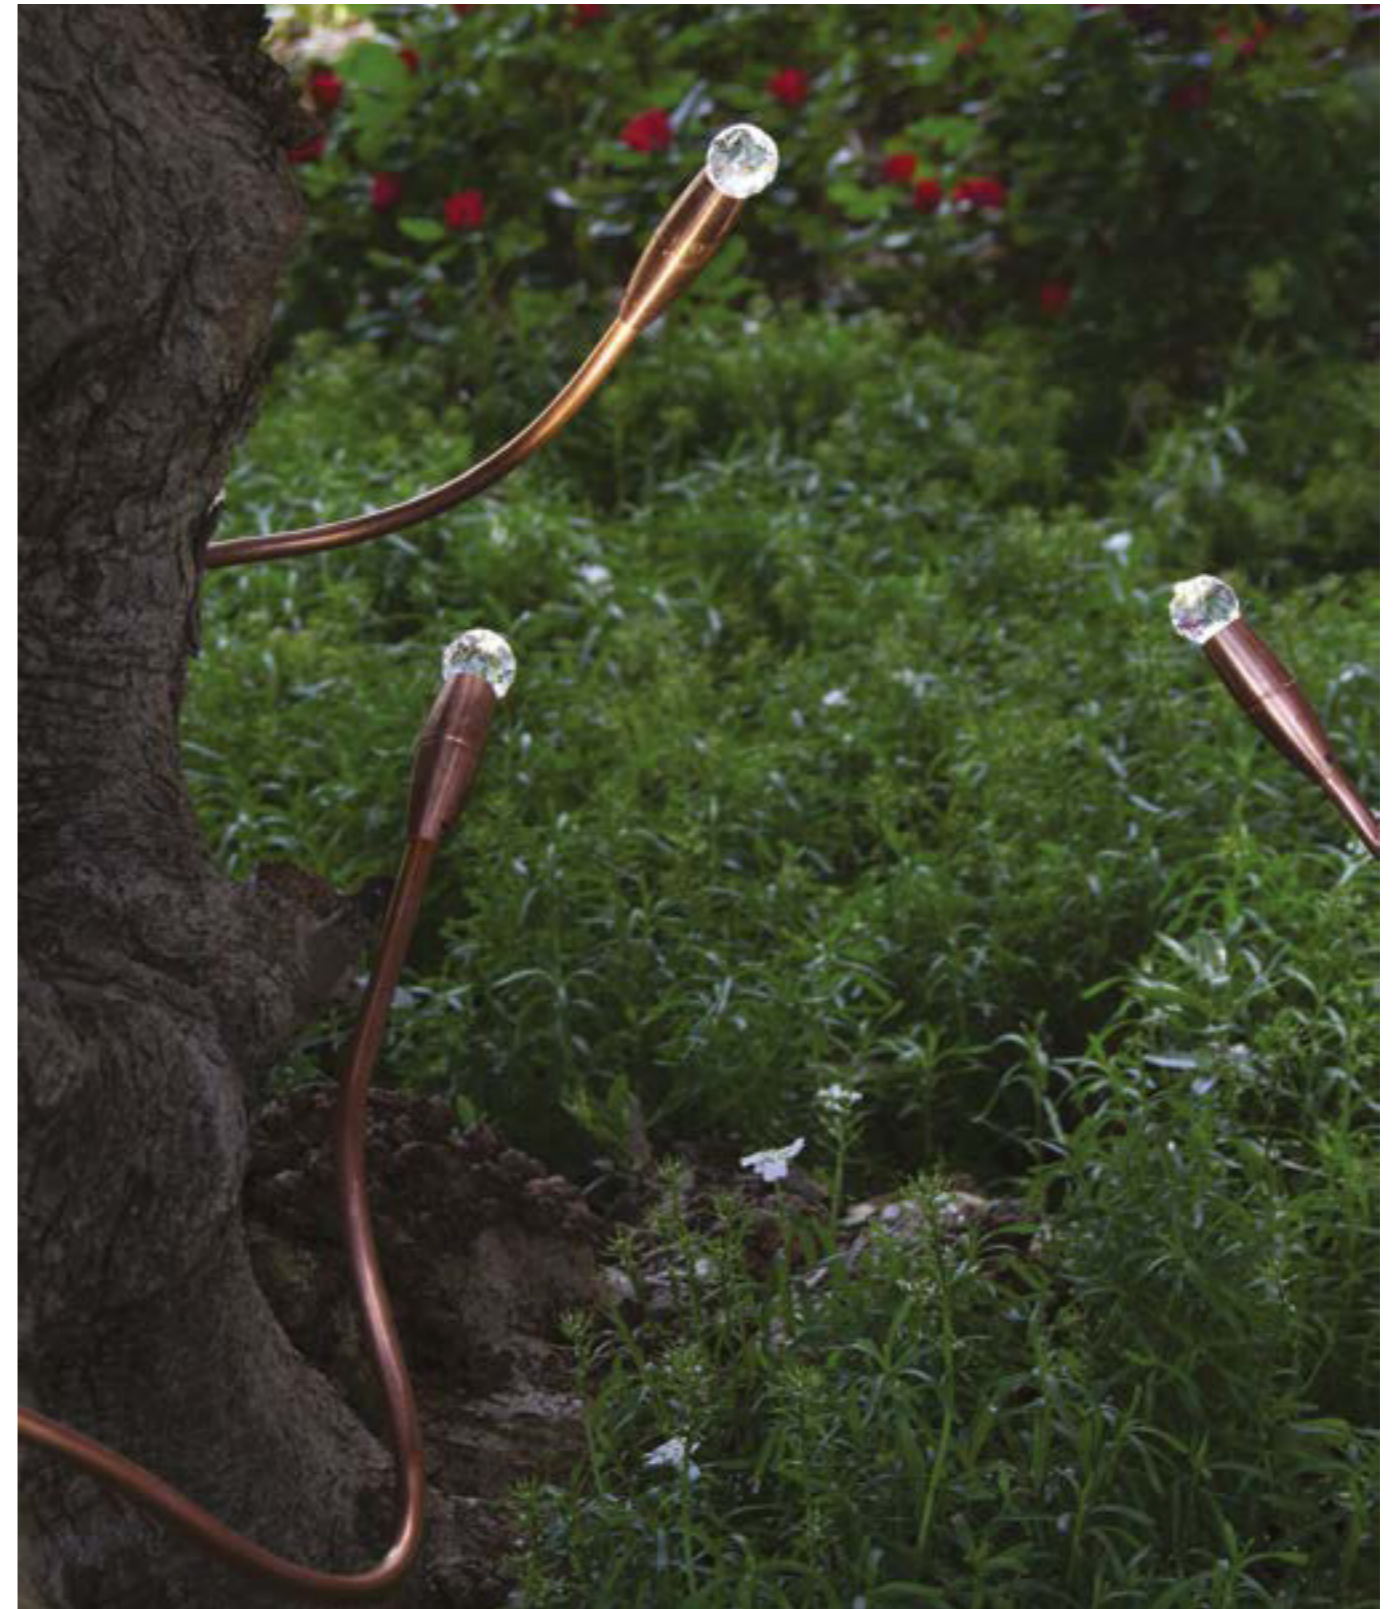

## FINISHES CODES




**.38** Shiny Copper


# TRILLI




## ACCESSORIES




**0259/1** Stake for temporary installation on field




**0243** IP connector on cable




**0246/R** Draining formwork with plate




**0252/1** Installation base for 1 art. Trilli




**0252/2** Installation base for 2 art. Trilli



**0252/3** Installation base for 3 art. Trilli



**0276** IP67 Connector with gel

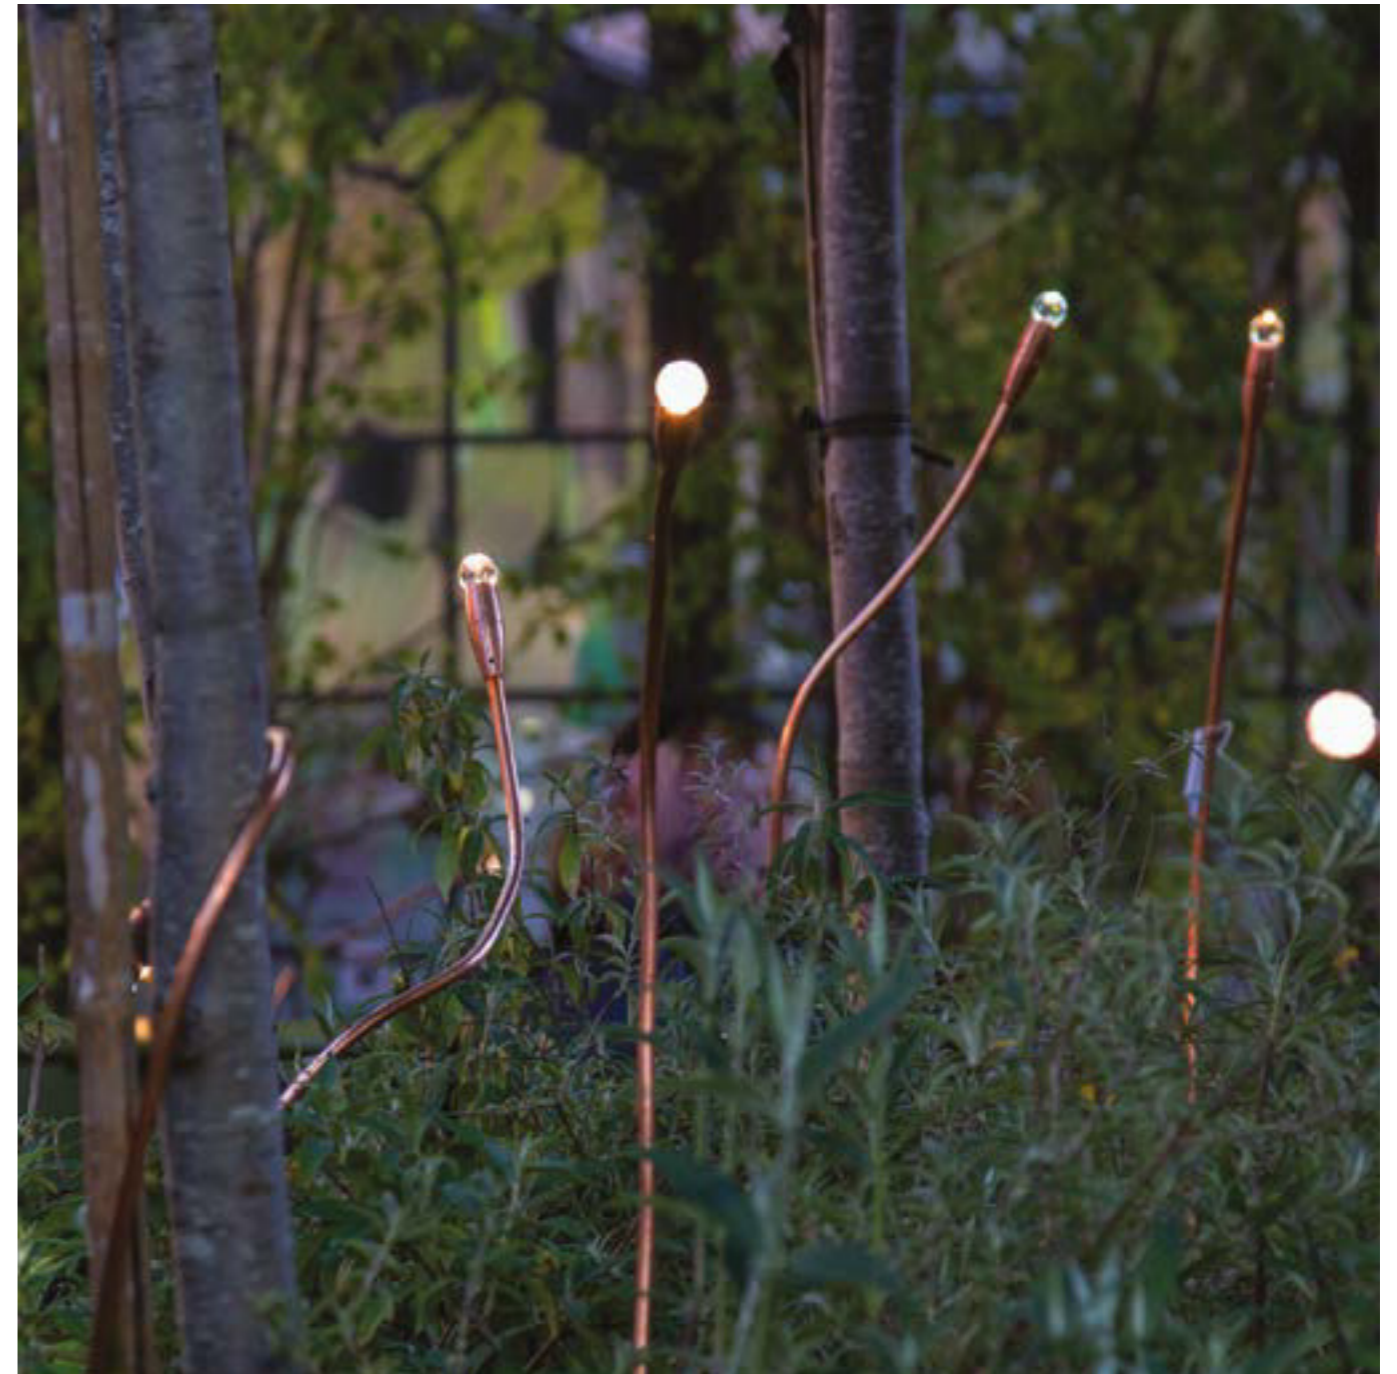

## DRIVERS

### ON/OFF

Cod.	0031/IP 350mA	0125 350m	0128 350mA
<b>3547</b>	1-12	1-6	1-12
<b>3548</b>	1-12	1-6	1-12
<b>3549</b>	1-12	1-6	1-12



### DIMMABLE

Cod.	141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0733/DIM PHASE CUT
<b>3547</b>	4-14	5-14	1-21	1-21	1
<b>3548</b>	4-14	5-14	1-21	1-21	1
<b>3549</b>	4-14	5-14	1-21	1-21	1

Only serial connection





EXAMPLES OF MULTIPLE CONFIGURATION

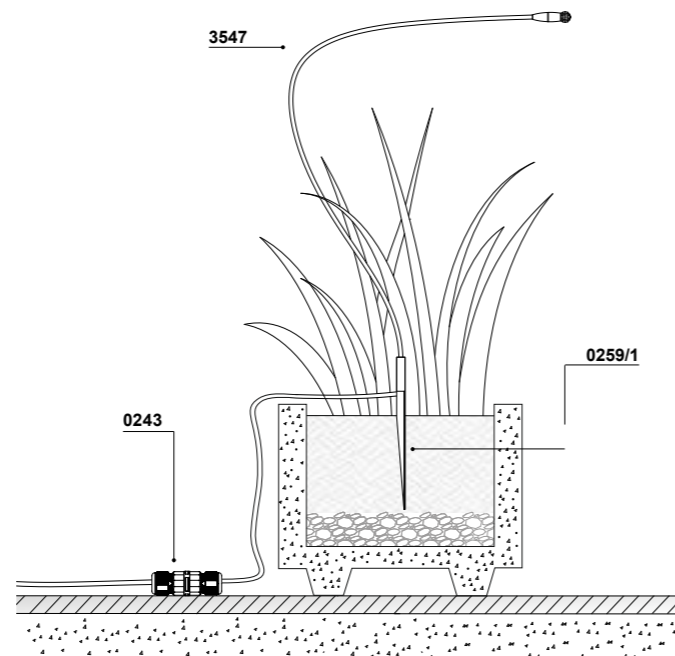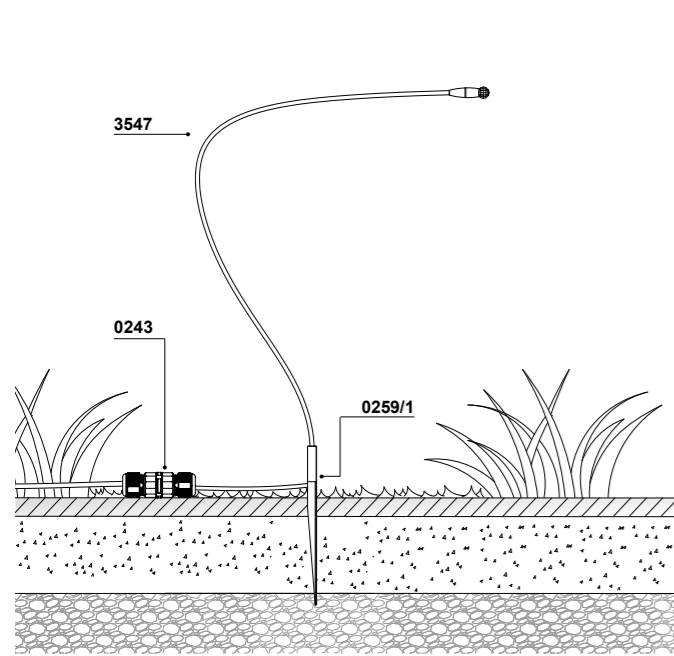

Soft copper pipe, when installed outdoors, will begin a spontaneous reaction with oxygen and water to form its own natural protective layer of copper oxide on its surface. Depending on the composition of the water, the color of this layer varies from turquoise blue to deep green.

The choice of the driver depends on total power consumption. The drivers, to be ordered separately, must be placed remotely.

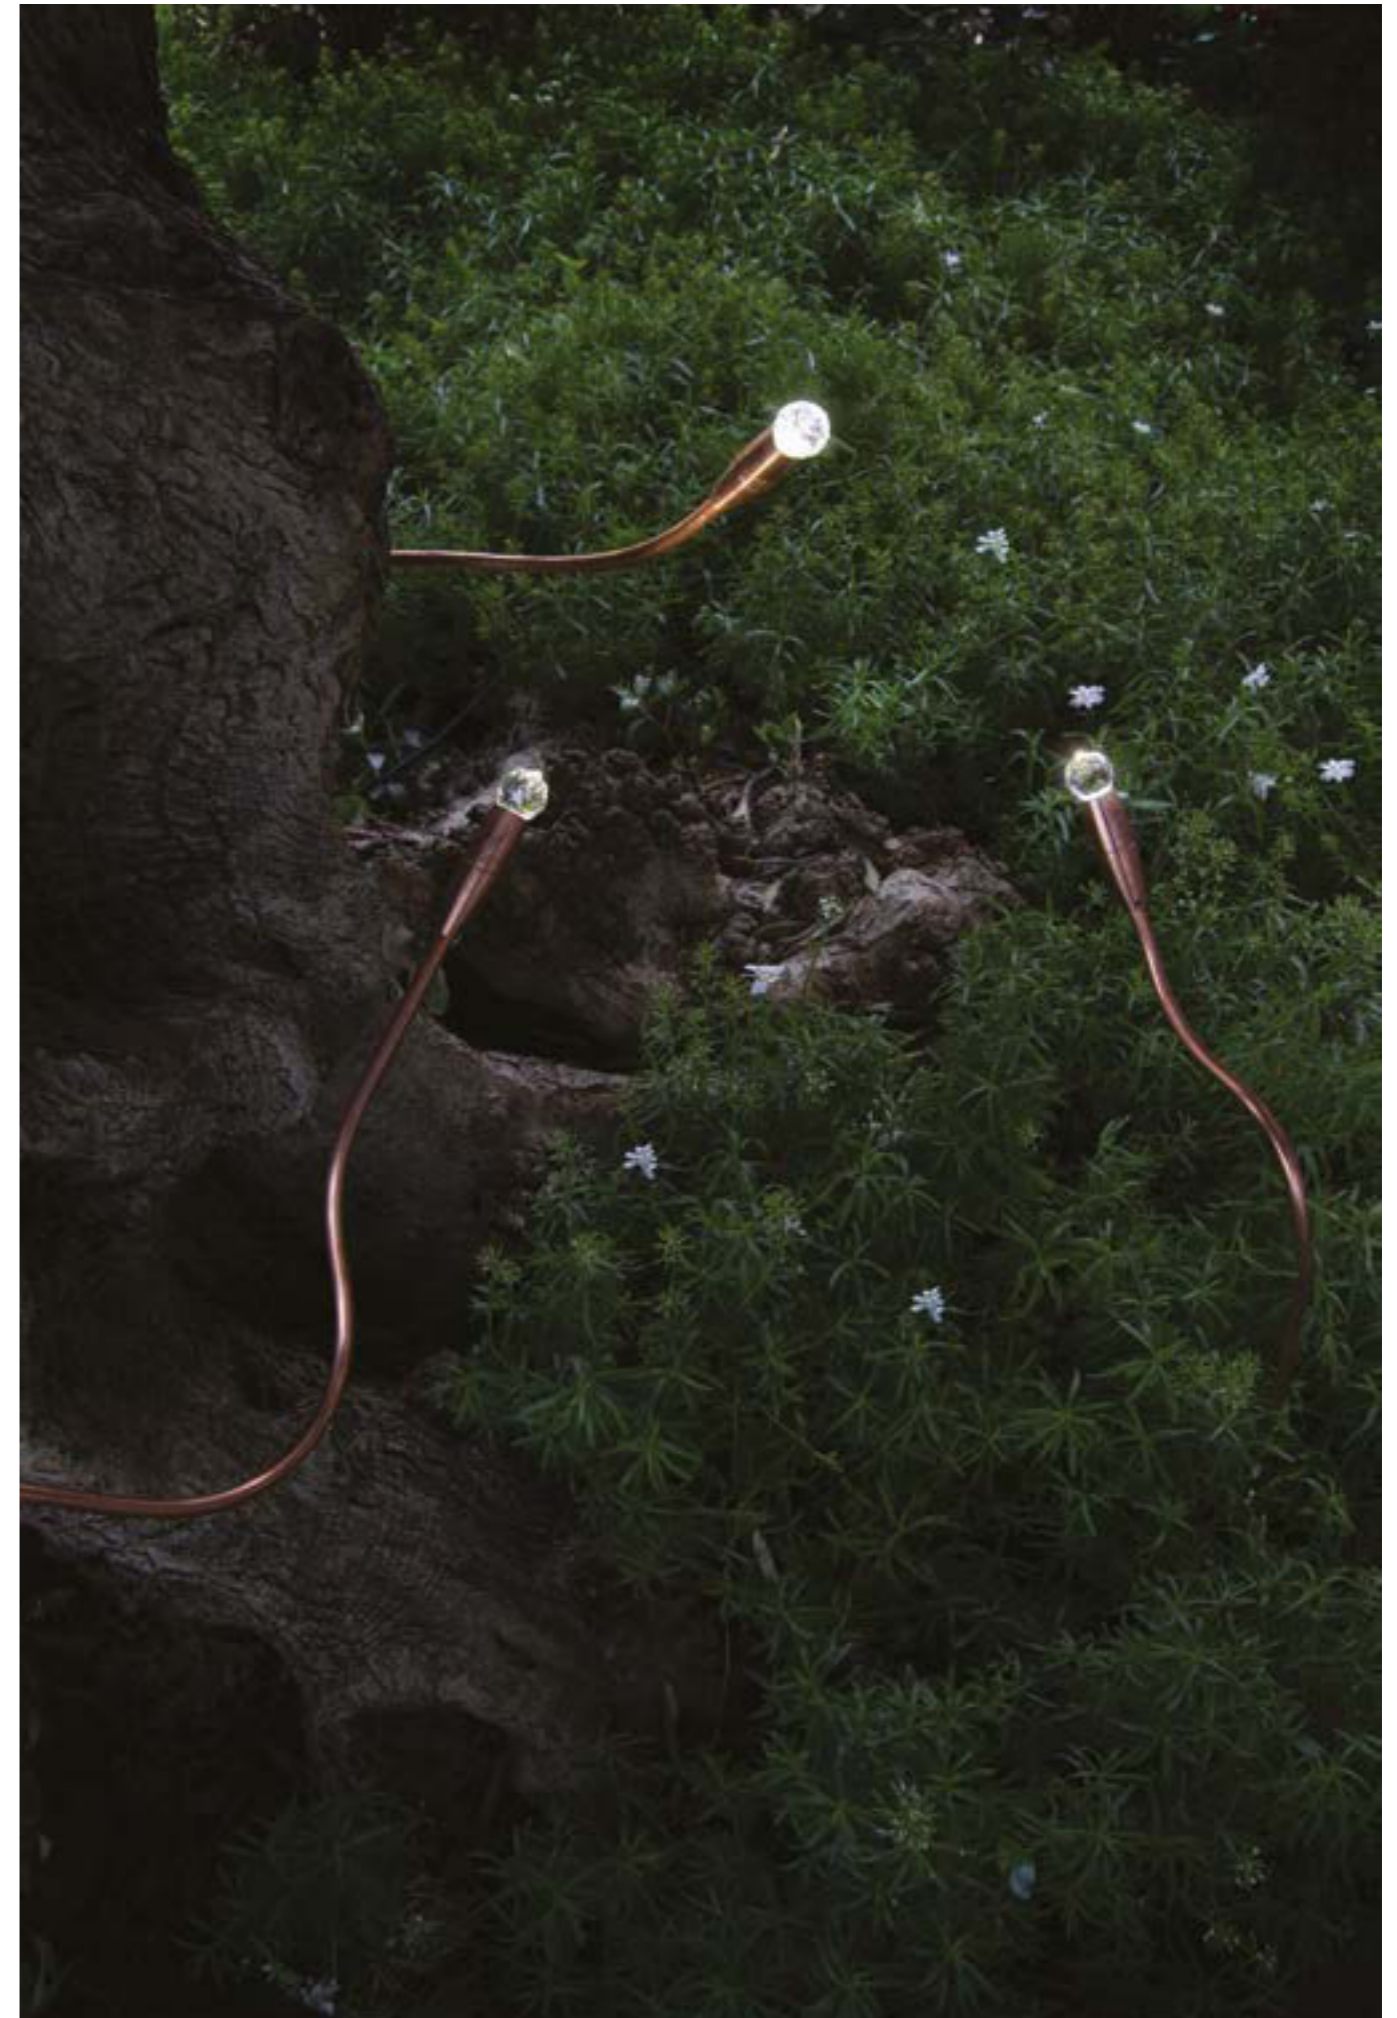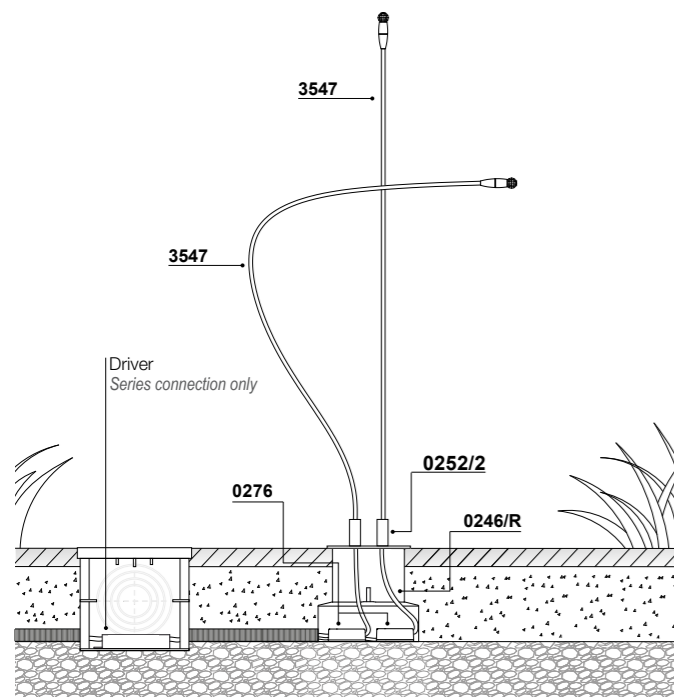







INDOOR

# ECLIPSE IP

Design ABS Studio





## ECLIPSE IP



Outdoor wall lamp with grazing radial emission light.

The body is made of anodized and painted die-cast aluminum, the screen in opal methacrylate.

The front disc is in painted aluminum. Eclipse IP is an outdoor lamp also designed to furnish with one delicate light that seems to caress the wall. It can be installed alone or in series to enrich a facade, a porch or a any exterior wall.


*Lampada da parete per esterni con luce radente a emissione radiale.*

*Il corpo è in alluminio pressofuso anodizzato e verniciato, lo schermo in metacrilato opalino. Il disco frontale è in alluminio verniciato. Eclipse IP è una lampada da esterno pensata anche per arredare con una luce delicata che sembra accarezzare la parete. Può essere installata da sola o in serie per arricchire una facciata, un portico o una qualsiasi parete esterna.*



*Außenwandleuchte mit streifendem radialem Emissionslicht.*

*Der Korpus besteht aus eloxiertem und lackiertem Aluminium-Druckguss, der opale Methacrylatschirm. Die vordere Scheibe ist aus lackiertem Aluminium. Eclipse IP ist eine Außenleuchte, die auch dazu gedacht ist, mit einem zarten Licht zu dekorieren, das die Wand zu streicheln scheint.*

*Es kann allein oder in Reihe installiert werden, um eine Fassade, eine Veranda oder jede andere Außenwand zu bereichern.*

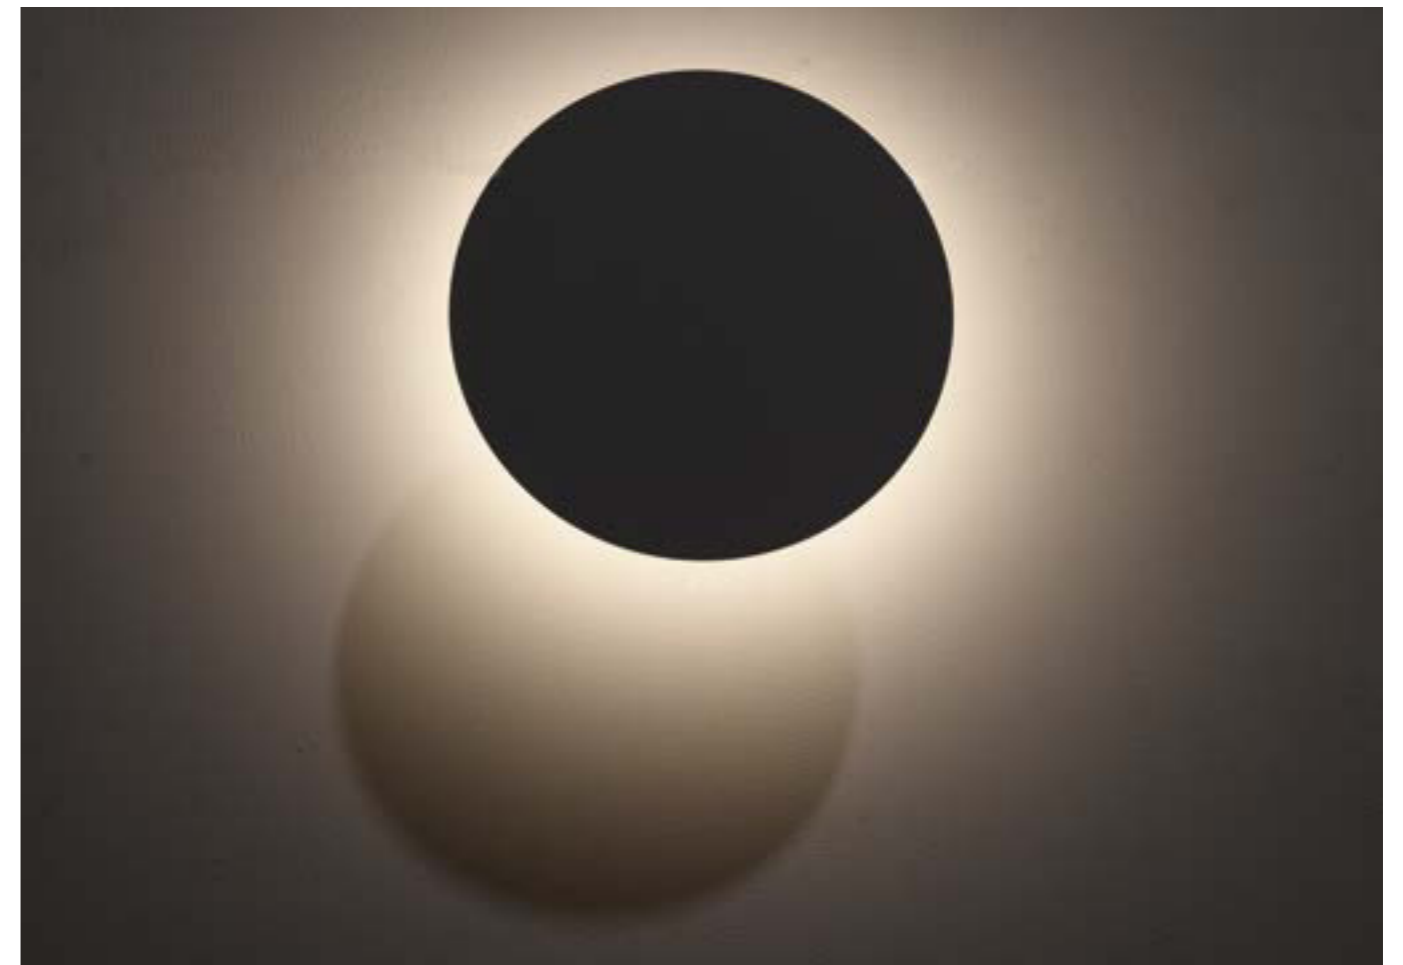


# ECLIPSE IP




**4625** 1,50 Kg

<b>.01</b>	White	
<b>.34</b>	Painted Corten	
<b>.39</b>	Painted Anthracite	

**/WW** 3000K LED 8,7W 670lm



## FINISHES CODES

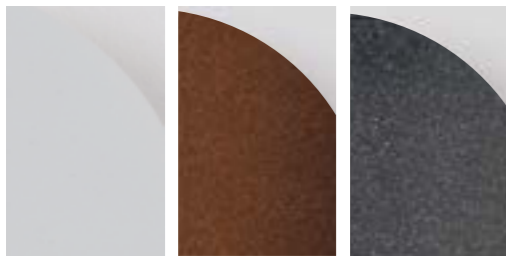

**.01** White **.34** Painted corten **.39** Painted Anthracite











## TOP IP



IP44-rated recessed micro spotlight with direct light and an integrated 500mA LED source, aluminum frame, and three optical apertures of 15°, 25°, and 45°.

The spotlight is available with integrated power LEDs offering 2700K, 3000K, and 4000K white light with a CRI>90.

The shape, with the parabolic reflector integrated into the body, maximizes the quality of the LED source, projecting an extremely clean cone of light, with a design free of smudges or colored reflections.

*Micro faretto da incasso IP44 a luce diretta con sorgente LED integrata a 500mA, struttura in alluminio e tre aperture ottiche da 15°, 25° e 45°.*

*Il faretto è disponibile a catalogo con LED di potenza integrato a luce bianca 2700K, 3000K e 4000K con CRI>90.*

*La forma con la parabola integrata nel corpo è in grado di esaltare al massimo la qualità della sorgente LED proiettando un cono di luce estremamente pulito, con un disegno privo di sbavature o riflessi colorati.*


*IP44-zertifizierter Einbaustrahler mit direktem Licht, integrierter 500-mA-LED-Lichtquelle, Aluminiumrahmen und drei optischen Abstrahlwinkeln von 15°, 25° und 45°.*

*Der Strahler ist mit integrierten Hochleistungs-LEDs erhältlich, die weißes Licht mit 2700 K, 3000 K und 4000 K und einem Farbwiedergabeindex (CRI) > 90 erzeugen.*

*Die Form mit dem im Gehäuse integrierten Parabolreflektor optimiert die Lichtqualität der LED-Lichtquelle und erzeugt einen extrem klaren Lichtkegel ohne Schlieren oder Farbreflexionen.*



## TOP IP

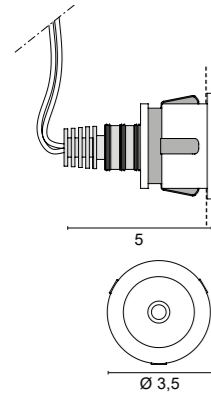

3 cm


### 6740

0,05 Kg

.01	White	
.02	Black	■
.31	Chromed	■
/W	4000K /11 /25 /45	LED 1,5W 500mA 180lm
/WW	3000K /11 /25 /45	LED 1,5W 500mA 162lm
/XW	2700K /11 /25 /45	LED 1,5W 500mA 153lm



## FINISHES CODES

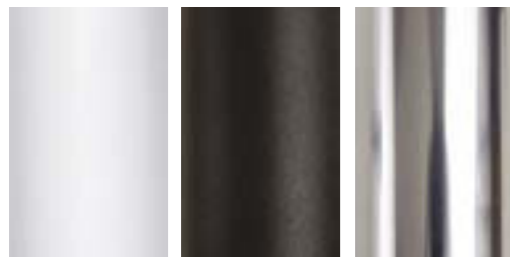

.01 White

.02 Black

.31 Chromed

## ACCESSORIES

Kit  
**0213**

Box + Plaster



Box  
**0216**

Plastic box



## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6740</b>	1-6	1-10	1-6

### DIMMABLE

Cod.	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6740</b>	1-11	1-11	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0143/IP
	500mA
<b>6740</b>	1-7

OUTDOOR

# CERCHIO

Design U.T. EgoLucce





## CERCHIO




IP67 walk-over recessed direct/diffused spotlight with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable

*Faretto da incasso a luce diretta/diffusa IP67 con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm.*

*Begehrbarer Direkt-/Diffusor-Einbaustrahler IP67 mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel*




# CERCHIO

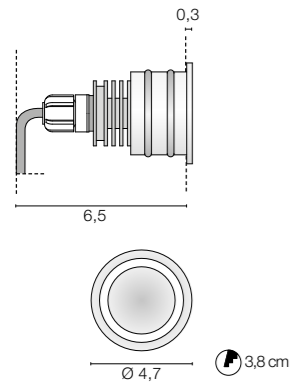

**6389** 0,20 Kg

<b>.33</b>	Stainless Steel AISI 316L		
<b>/B</b>	LED BLU	max 1W 350mA	
<b>/W</b>	4000K	max 1,5W 500mA	221lm
<b>/WW</b>	3000K	max 1,5W 500mA	210lm
<b>/XW</b>	2700K	max 1,5W 500mA	199lm



**.33/B**



**.33/W**



**.33/WW**



**.33/XW**

## FINISHES CODES



**.33** Stainless Steel  
AISI 316L



## ACCESSORIES

Kit  
**0250**

Kit draining junction  
+ IP connector



Box  
**0217**

Plastic box



## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6389</b>	1-6	1-10	1-6

### DIMMABLE


Cod.	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6389</b>	1-11	1-11	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0033/IP	0143/IP
	350mA	500mA
<b>6389</b>	1-10	1-7

# CERCHIO RGB

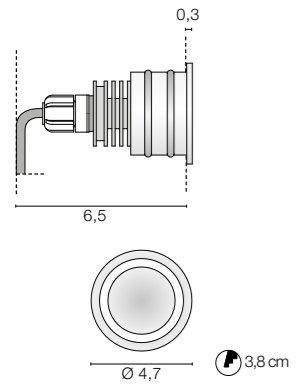

**6390** 0,30 Kg


**.33** Stainless Steel AISI 316L

3 x 250mA

## FINISHES CODES



**.33** Stainless Steel  
AISI 316L

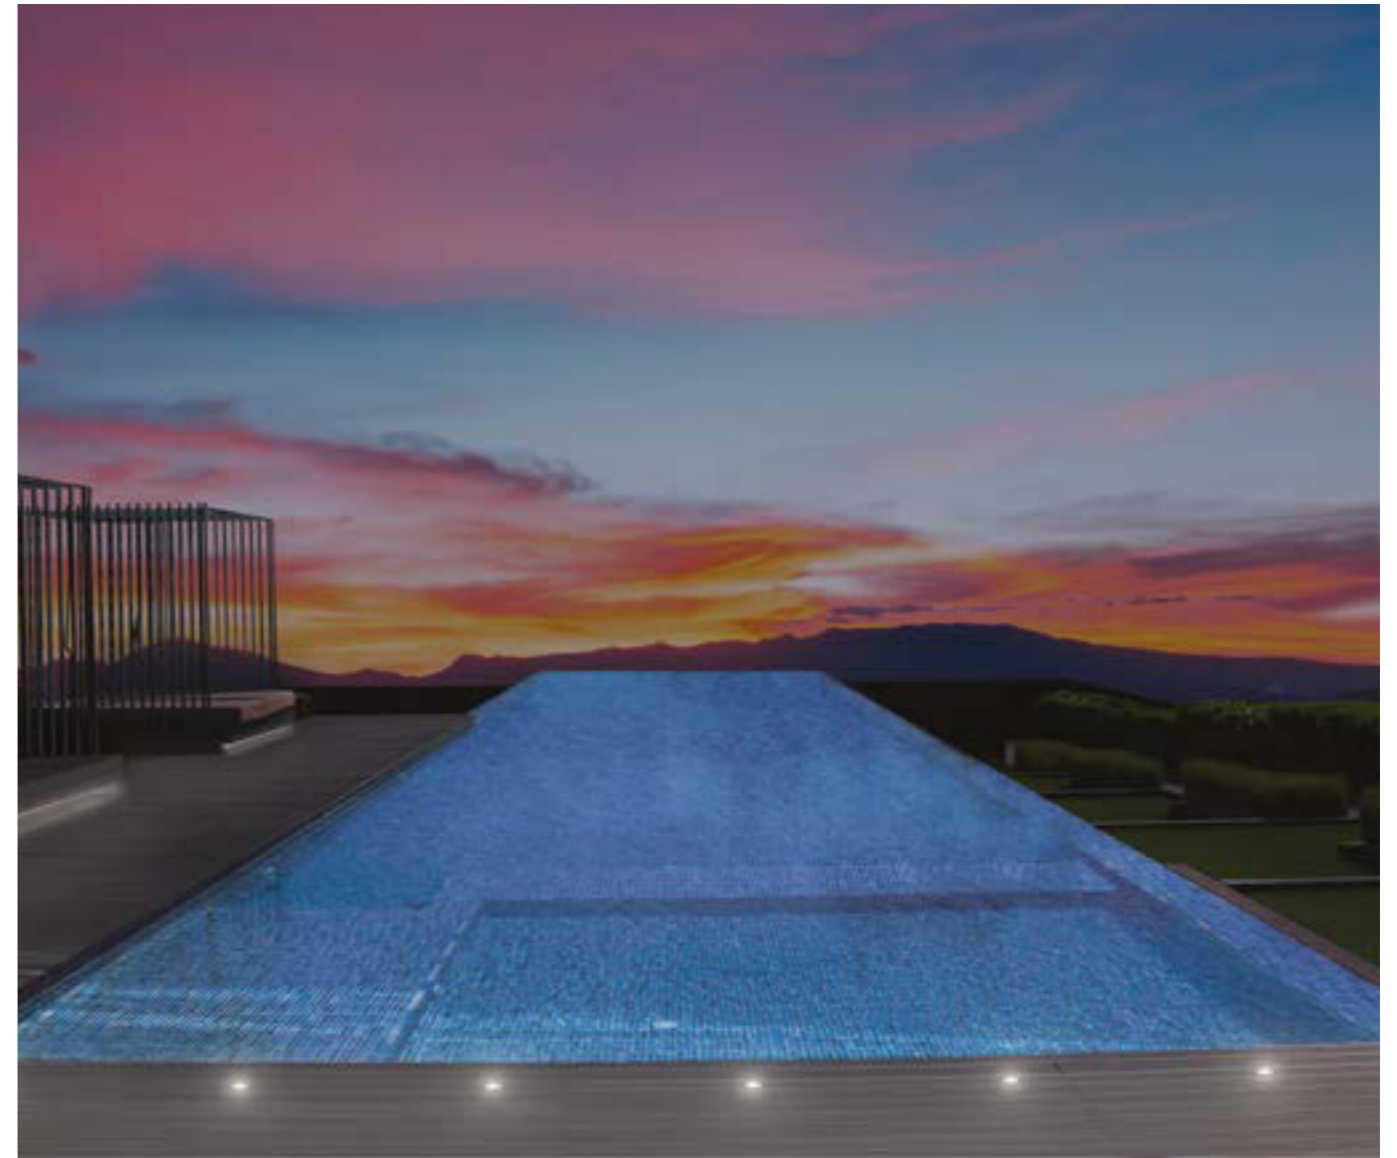

## ACCESSORIES

Kit  
**0251**

Draining junction



Box  
**0217**

Plastic box



## DRIVERS

### DRIVER RGB

**0164** 120W      **0167** 22W

IN 230V - OUT 3 X 24V

### DRIVER RGB CASAMBI

**0164/CASA** 120W

IN 230V - OUT 3 X 24V

### SENSOR & CABLE RGB

**0163** IR Sensor

**0165** IR Remote controller

**0166** Sync Cable

### CONVERTER RGB

**0168** IN 24V - OUT 3 X 250mA 1-5 Cerchio RGB

OUTDOOR

# KROSS

Design U.T. EgoLuce





## KROSS





IP67 walkable downlight with radial light with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable.

*Downlight calpestabile IP67 a luce radiale con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm.*

*Begehbares IP67-Downlight mit Radiallicht mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel.*


# KROSS




**6361** 0,10 Kg

**.33** Stainless Steel AISI 316L


<b>/B</b>	LED BLU	max 1,5W 500mA	
<b>/W</b>	4000K	max 1,5W 500mA	180lm
<b>/WW</b>	3000K	max 1,5W 500mA	162lm
<b>/XW</b>	2700K	max 1,5W 500mA	153lm



**.33/W**



**.33/WW**



**.33/B**

## FINISHES CODES



**.33** Stainless Steel  
AISI 316L



## ACCESSORIES

Kit  
**0220**

Kit draining junction  
+ IP connector



Box  
**0216**

Plastic box



Spring for  
plasterboard included



3,2 cm

## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6361</b>	1-6	1-10	1-6

### DIMMABLE


Cod.	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6361</b>	1-11	1-11	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0031/IP	0143/IP
	350mA	500mA
<b>6361</b>	1-12	1-7

# KROSS MINI

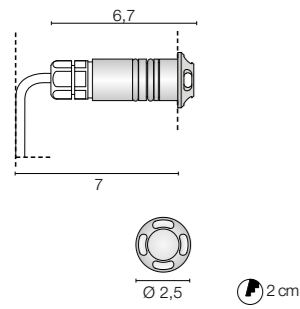

**6735** 0,07 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	1W 350mA	129lm
<b>/WW</b>	3000K	1W 350mA	117lm
<b>/XW</b>	2700K	1W 350mA	110lm



## ACCESSORIES

Box  
**0215**

Plastic box



Spring for  
plasterboard included




2,2 cm

## FINISHES CODES



**.33** Stainless Steel  
AISI 316L

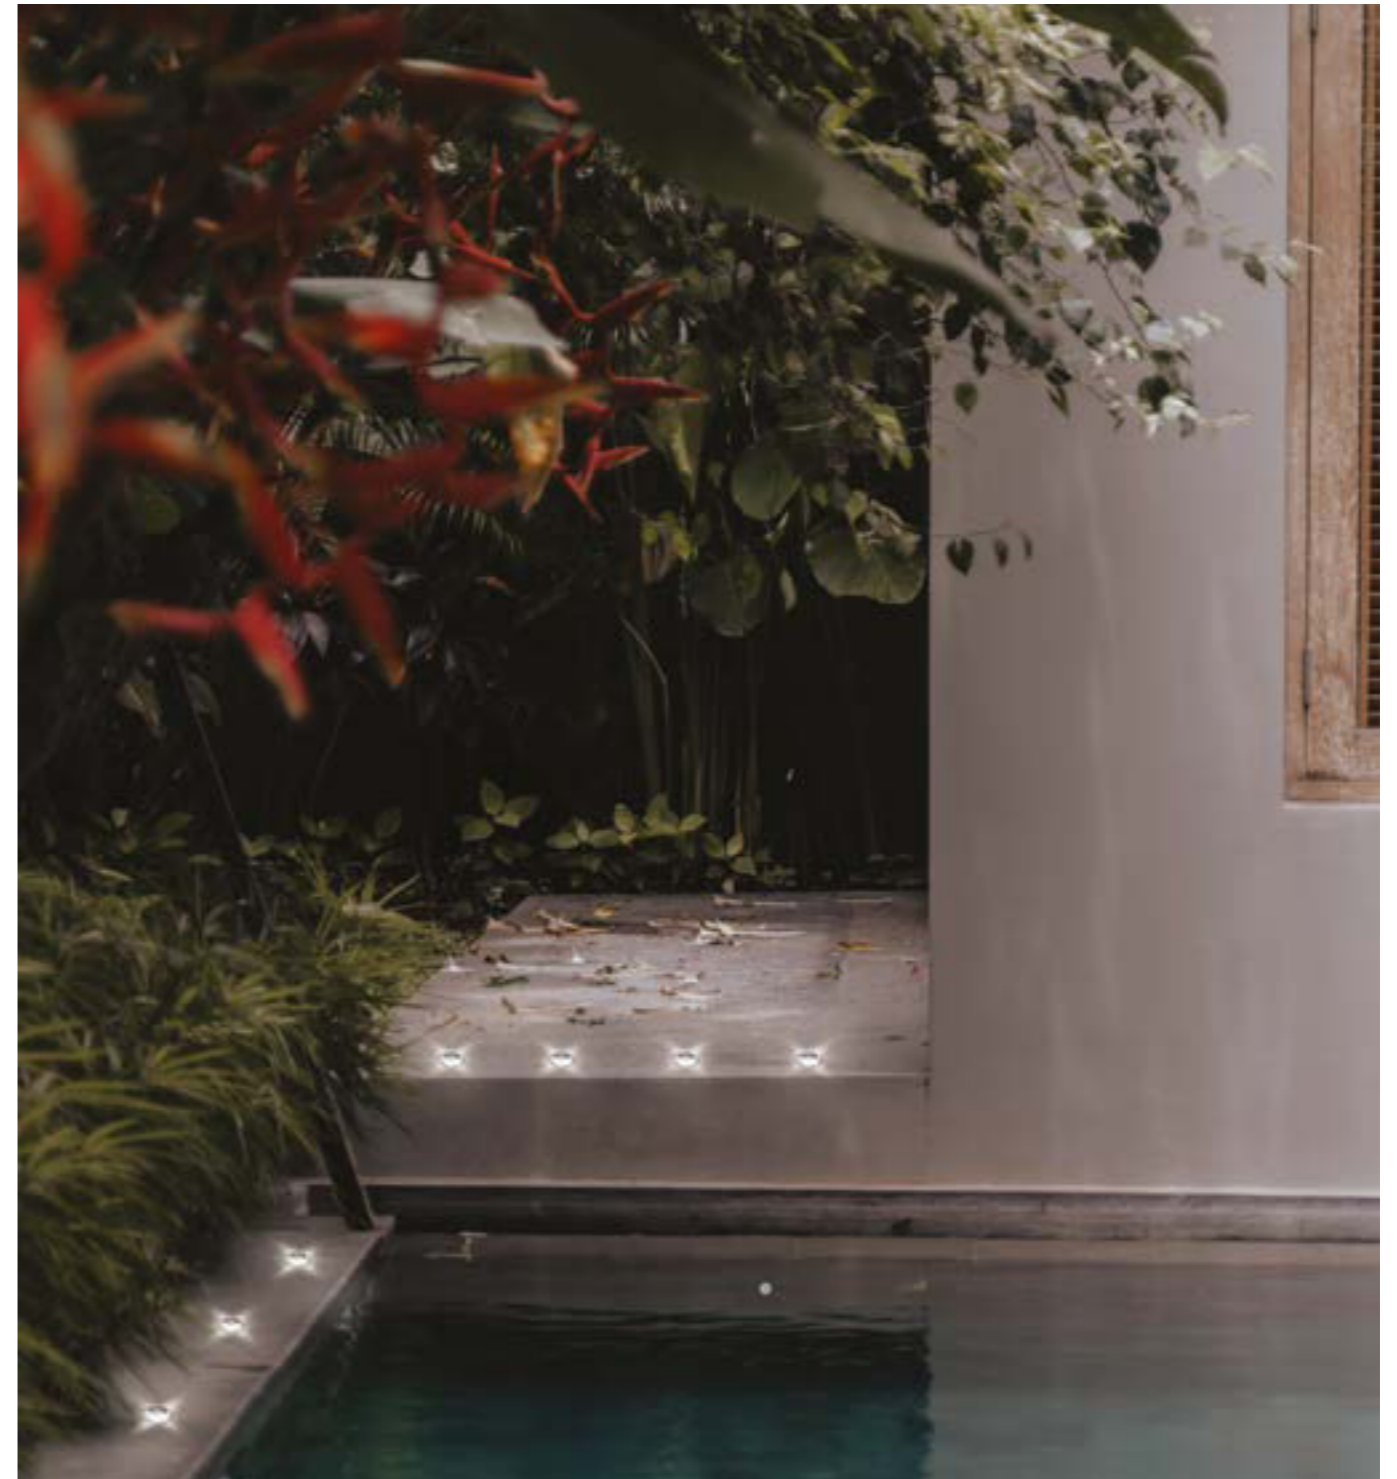

## DRIVERS

### ON/OFF

Cod.	0125	0128
	350mA	350mA
<b>6735</b>	1-6	1-10

### DIMMABLE

Cod.	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
<b>6735</b>	1-12	1-12	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0031/IP 350mA
<b>6735</b>	1-12



OUTDOOR

# VISTA

Design U.T. EgoIuce





## VISTA





IP67 walkable downlight with radial light with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable.

*Downlight calpestabile IP67 a luce radiale con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm.*

*Begehbares IP67-Downlight mit Radiallicht mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel.*

# VISTA



**6362** 0,11 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	max 1,5W 500mA	180lm
<b>/WW</b>	3000K	max 1,5W 500mA	162lm
<b>/XW</b>	2700K	max 1,5W 500mA	153lm



## FINISHES CODES



**.33** Stainless Steel  
AISI 316L



## ACCESSORIES

Kit  
**0220**

Kit draining junction  
+ IP connector



Box  
**0216**

Plastic box



Spring for  
plasterboard included



3,2 cm

## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6362</b>	1-6	1-10	1-6

### DIMMABLE


Cod.	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
<b>6362</b>	1-11	1-11	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0031/IP 350mA	0143/IP 500mA
<b>6362</b>	1-12	1-7

# VISTA MINI

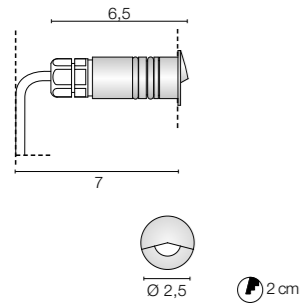

**6734** 0,07 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	1W 350mA	129lm
<b>/WW</b>	3000K	1W 350mA	117lm
<b>/XW</b>	2700K	1W 350mA	110lm



## FINISHES CODES



**.33** Stainless Steel  
AISI 316L

## ACCESSORIES

Box  
**0215**

Plastic box



Spring for  
plasterboard included



Ø 2,2 cm

## DRIVERS

### ON/OFF

Cod.	0125	0128
	350mA	350mA
<b>6734</b>	1-6	1-10

### DIMMABLE

0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6734</b>	1-12	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0031/IP
	350mA
<b>6734</b>	1-12



OUTDOOR

# DRIVE

Design U.T. Egoluce





## DRIVE




IP67 driveway recessed diffused spotlight with AISI 316L stainless steel flange, screen-printed opal glass diffuser, aluminium heat sink, frosted glass screen and neoprene cable.

*Faretto diffuso da incasso calpestabile IP67 con flangia in acciaio inox AISI 316L, diffusore in vetro opalino serigrafato, dissipatore di calore in alluminio, schermo in vetro satinato e cavo in neoprene.*

*Diffuser Einbaustrahler IP67 mit Flansch aus Edelstahl AISI 316L, Diffusor aus Opalglas mit Siebdruck, Kühlkörper aus Aluminium, Mattglasscheibe und Neoprenkabel*

## DRIVE

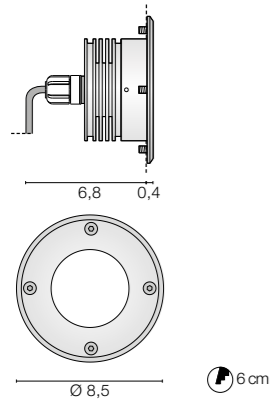

**6729** 0,40 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	LED 4W 24V	658lm
<b>/WW</b>	3000K	LED 4W 24V	608lm
<b>/XW</b>	2700K	LED 4W 24V	562lm



Driveover recessed spot 2000Kg

## ACCESSORIES

Kit  
**0229**

Kit draining junction  
+ IP connector



## FINISHES CODES



**.33** Stainless Steel  
AISI 316L



## DRIVERS

### ON/OFF

Cod.	0155	0156
	24V - 13W	24V - 25W

<b>6729</b>	1-2	1-4
-------------	-----	-----

### DIMMABLE

Cod.	0717/DIM60/V	0717/DIM60
	PUSH - 1...10V	DALI - PUSH

<b>6729</b>	1-10	1-10
-------------	------	------

Only Parallel connection

### IP67 DRIVER

Cod.	0033/IP	0037/IP
	24V 14,4W	24V 60W

<b>6729</b>	1-2	1-10
-------------	-----	------



OUTDOOR

# TRIS

Design U.T. EgoLucce





## TRIS




IP67 walk-over recessed outdoor spotlight with AISI 316L stainless steel flange and aluminium heat sink, fitted with clear protective glass and 30 cm neoprene cable.

*Faretto da incasso per esterni IP67 con flangia in acciaio inox AISI 316L e dissipatore di calore in alluminio, dotato di vetro di protezione trasparente e cavo in neoprene da 30 cm.*

*Begehbare IP67-Einbaustrahler für den Außenbereich mit Flansch aus Edelstahl AISI 316L und Kühlkörper aus Aluminium, ausgestattet mit klarem Schutzglas und 30 cm Neoprenkabel.*

# TRIS

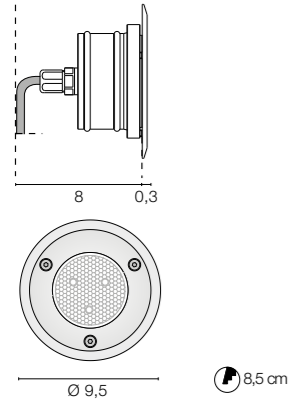


**6371** 0,40 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	max 3x1,5W 500mA	663lm
<b>/WW</b>	3000K	max 3x1,5W 500mA	630lm
<b>/XW</b>	2700K	max 3x1,5W 500mA	597lm



## FINISHES CODES



**.33** Stainless Steel  
AISI 316L



## ACCESSORIES

Kit  
**0231**

Kit draining junction  
+ IP connector



Box  
**0235**

Wall plastic box



Connector  
**0243**

IP connector



Kit  
**0233**

Spring for plaster-  
board



8,5 cm

## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6371</b>	1-2	1-3	1-2

### DIMMABLE

Cod.	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
<b>6371</b>	1-3	1-3	1-7	1-7

Only serial connection

### IP67 DRIVER

Cod.	0031/IP 350mA	0143/IP 500mA
<b>6371</b>	1-3	1-2



OUTDOOR

# SOFT

Design U.T. Egoluce





## SOFT




IP67 walk-over downlight with AISI 316L stainless steel round flange, aluminium heat sink, frosted safety glass and 30 cm neoprene cable.

*Faretto calpestabile IP67 con flangia circolare in acciaio inox AISI 316L, dissipatore di calore in alluminio, vetro di sicurezza satinato e cavo in neoprene da 30 cm.*


*Begehbares Downlight IP67 mit rundem Flansch aus Edelstahl AISI 316L, Kühlkörper aus Aluminium, mattiertem Sicherheitsglas und 30 cm Neoprenkabel.*

# SOFT

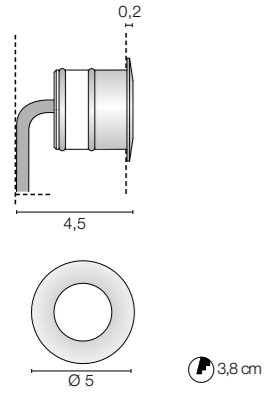

**6388** 0,11 Kg

<b>.33</b>	Stainless Steel AISI 316L		
<b>/W</b>	4000K	LED 1,5W 12V	50lm
<b>/WW</b>	3000K	LED 1,5W 12V	45lm



## ACCESSORIES

Kit  
**0250**  
Kit draining junction  
+ IP connector



Box  
**0217**  
Plastic box



## FINISHES CODES



**.33** Stainless Steel  
AISI 316L



## DRIVERS

### ON/OFF

<b>Cod.</b>	<b>0158</b> 12V - 25W
<b>6388</b>	1-15

### DIMMABLE

<b>Cod.</b>	<b>0129</b> Multi power dimmable driver	<b>0129/DALI</b> Multi power DALI dimmable driver
<b>6388</b>	1-6	1-6

Only Parallel connection

### IP67 DRIVER

<b>Cod.</b>	<b>0036/IP</b> 12V 14,4W
<b>6388</b>	1-8



OUTDOOR

# STEP MINI

Design U.T. EgoLuce





## STEP MINI




Outdoor recessed spotlight (IP 65) with asymmetrical light in anodised or white painted aluminium with reinforced outdoor finish and neoprene cable.

*Faretto da incasso per esterni (IP 65) a luce asimmetrica in alluminio anodizzato o verniciato bianco con finitura esterna rinforzata e cavo in neoprene.*

*Einbaustrahler für den Außenbereich (IP 65) mit asymmetrischem Licht aus eloxiertem oder weiß lackiertem Aluminium mit verstärkter Außenlackierung und Neoprenkabel.*




## STEP MINI

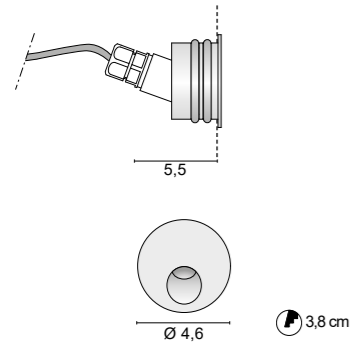

**6738** 0,08 Kg

**.01** White   
**.45** Anodized Aluminium

**/W** 4000K 1W 350mA 129lm  
**/WW** 3000K 1W 350mA 117lm  
**/XW** 2700K 1W 350mA 110lm

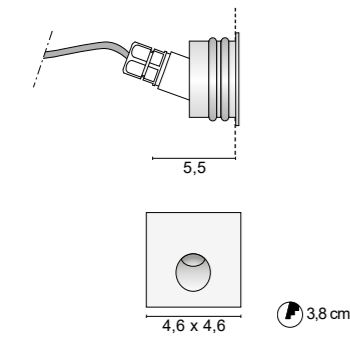


**6739** 0,08 Kg

**.01** White   
**.45** Anodized Aluminium

**/W** 4000K 1W 350mA 129lm  
**/WW** 3000K 1W 350mA 117lm  
**/XW** 2700K 1W 350mA 110lm



## FINISHES CODES



**.01** White **.45** Anodized Aluminium



## ACCESSORIES

Kit  
**0214**

Box + Plaster



Box  
**0217**

Plastic box



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA
<b>6738</b>	1-6	1-10
<b>6739</b>	1-6	1-10

### DIMMABLE

Cod.	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
<b>6738</b>	1-12	1-12	1-21	1-21
<b>6739</b>	1-12	1-12	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0031/IP 350mA
<b>6738</b>	1-12
<b>6739</b>	1-12

OUTDOOR

# STAR IP

Design U.T. Egołuce





## STAR



RGB, IP65, recessed mini trim spotlight with integrated high performance COB LED source, aluminum body, round frame, glass screen and accessory supplied for installation on plasterboard ceilings.

On request, round and square formworks are available for installation in plasterboard for a total disappearance of the spotlight.

The small size and the degree of protection make it ideal for lighting small rooms, outdoor niches, bathrooms and shower boxes.

*Faretto mini trim RGB, IP65 da incasso con sorgente COB LED integrata ad elevate prestazioni, corpo in alluminio, cornice tonda, schermo in vetro e accessorio in dotazione per installazioni su soffitti in cartongesso.*

*Su richiesta sono disponibili casseforme tonde e quadrate per l'installazione in cartongesso per una scomparsa totale del faretto.*

*Le ridotte dimensioni e il grado di protezione lo rendono ideale illuminare piccoli ambienti, nicchie in esterno, bagni e box doccia.*


*RGB, IP65, Mini-Einbaustrahler mit integrierter COB-Hochleistungs-LED-Quelle, Aluminiumgehäuse, rundem Rahmen, Glasscheibe und mitgeliefertem Zubehör für die Installation an Gipskartondecken.*

*Auf Anfrage sind runde und quadratische Schalungen für den Einbau in Gipskartonplatten erhältlich, um den Strahler vollständig verschwinden zu lassen.*

*Die geringe Größe und die Schutzart machen ihn ideal für die Beleuchtung kleiner Räume, Nischen im Freien, Bäder und Duschkabinen.*





# STAR IP - STAR RGB

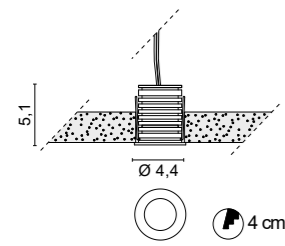

**6692** 0,12 Kg

- .01 White
- .02 Black
- .31 Chromed


/W	4000K	LED 17V 2,4W 150mA	398lm
/WW	3000K	LED 17V 2,4W 150mA	376lm
/XW	2700K	LED 17V 2,4W 150mA	360lm



**6693** 0,14 Kg

- .01 White
- .02 Black
- .31 Chromed

LED 3 x 250mA



## ACCESSORIES

Trimless recessed installation in plasterboard

### 0206

- .01 White
- .01 Black

Round wall box for installation in plasterboard false ceiling

Trimless recessed installation in plasterboard

### 0207

- .01 White
- .01 Black

Square wall box for installation in plasterboard false ceiling

Brick installation

### 0225

Recessed box for brick mounting

Installation in concrete

### 0223


Recessed box for concrete mounting

Brick installation

### 0224/C

Perforated plaster kit

## FINISHES CODES

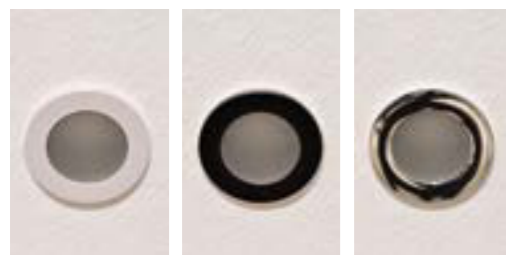

.01 White    .02 Black    .31 Chromed



Project Studio Keyart Milano

## DRIVERS

### ON/OFF

Cod. 0151/150  
150mA

6692 1-2

Only serial connection

### DRIVER RGB

0164 0167  
120W 22W

IN 230V - OUT 3 X 24V

### CONVERTER RGB CASAMBI

0168  
IN 24V - OUT 3 X 250mA 1-5 Star RGB

### DRIVER RGB CASAMBI

0164/CASA  
120W

IN 230V - OUT 3 X 24V

### SENSOR & CABLE RGB

0163  
IR Sensor

0165  
IR Remote controller

0166  
Sync Cable

INDOOR / OUTDOOR

# ZEPPELIN

Design U.T. EgoIuce



## ZEPPELIN




Series of walkable downlights (IP 67) with AISI 316L stainless steel flange, aluminum heat sink and 30cm neoprene cable. Available in round and square versions. Formwork or plasterboard mounting with special accessory.

*Serie di downlight calpestabili (IP 67) con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm. Disponibile nelle versioni tonda e quadrata. Montaggio su cassaforma o cartongesso con accessorio speciale.*

*Serie von begehbaren Downlights (IP 67) mit Flansch aus rostfreiem Stahl AISI 316L, Kühlkörper aus Aluminium und 30cm Neoprenkabel. Erhältlich in runder und quadratischer Ausführung. Montage auf Schalung oder Gipskarton mit speziellem Zubehör.*




# ZEPPELIN

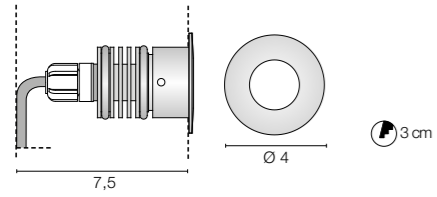

**6348.33/** 0,08 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	max LED 1,5W 500mA	180lm
<b>/WW</b>	3000K	max LED 1,5W 500mA	162lm
<b>/XW</b>	2700K	max LED 1,5W 500mA	153lm

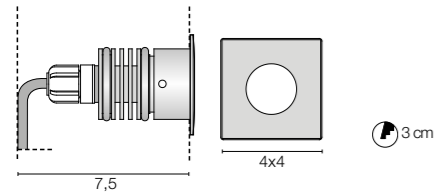

**6349.33/** 0,10 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	max LED 1,5W 500mA	180lm
<b>/WW</b>	3000K	max LED 1,5W 500mA	162lm
<b>/XW</b>	2700K	max LED 1,5W 500mA	153lm



## ACCESSORIES

Kit  
**0220**

Draining junction +  
IP Connector



Box  
**0216**

Plastic box



Spring for  
plasterbox Included



3,2 cm

## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6348</b>	1-6	1-10	1-6
<b>6349</b>	1-6	1-10	1-2


### IP67 DRIVER

Cod.	0031/IP	0143/IP
	350mA	500mA
<b>6348</b>	1-12	1-7
<b>6349</b>	1-12	1-7


### DIMMABLE

Cod.	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>6348</b>	2-11	2-11	1-21	1-21
<b>6349</b>	2-11	2-11	1-21	1-21

Only serial connection

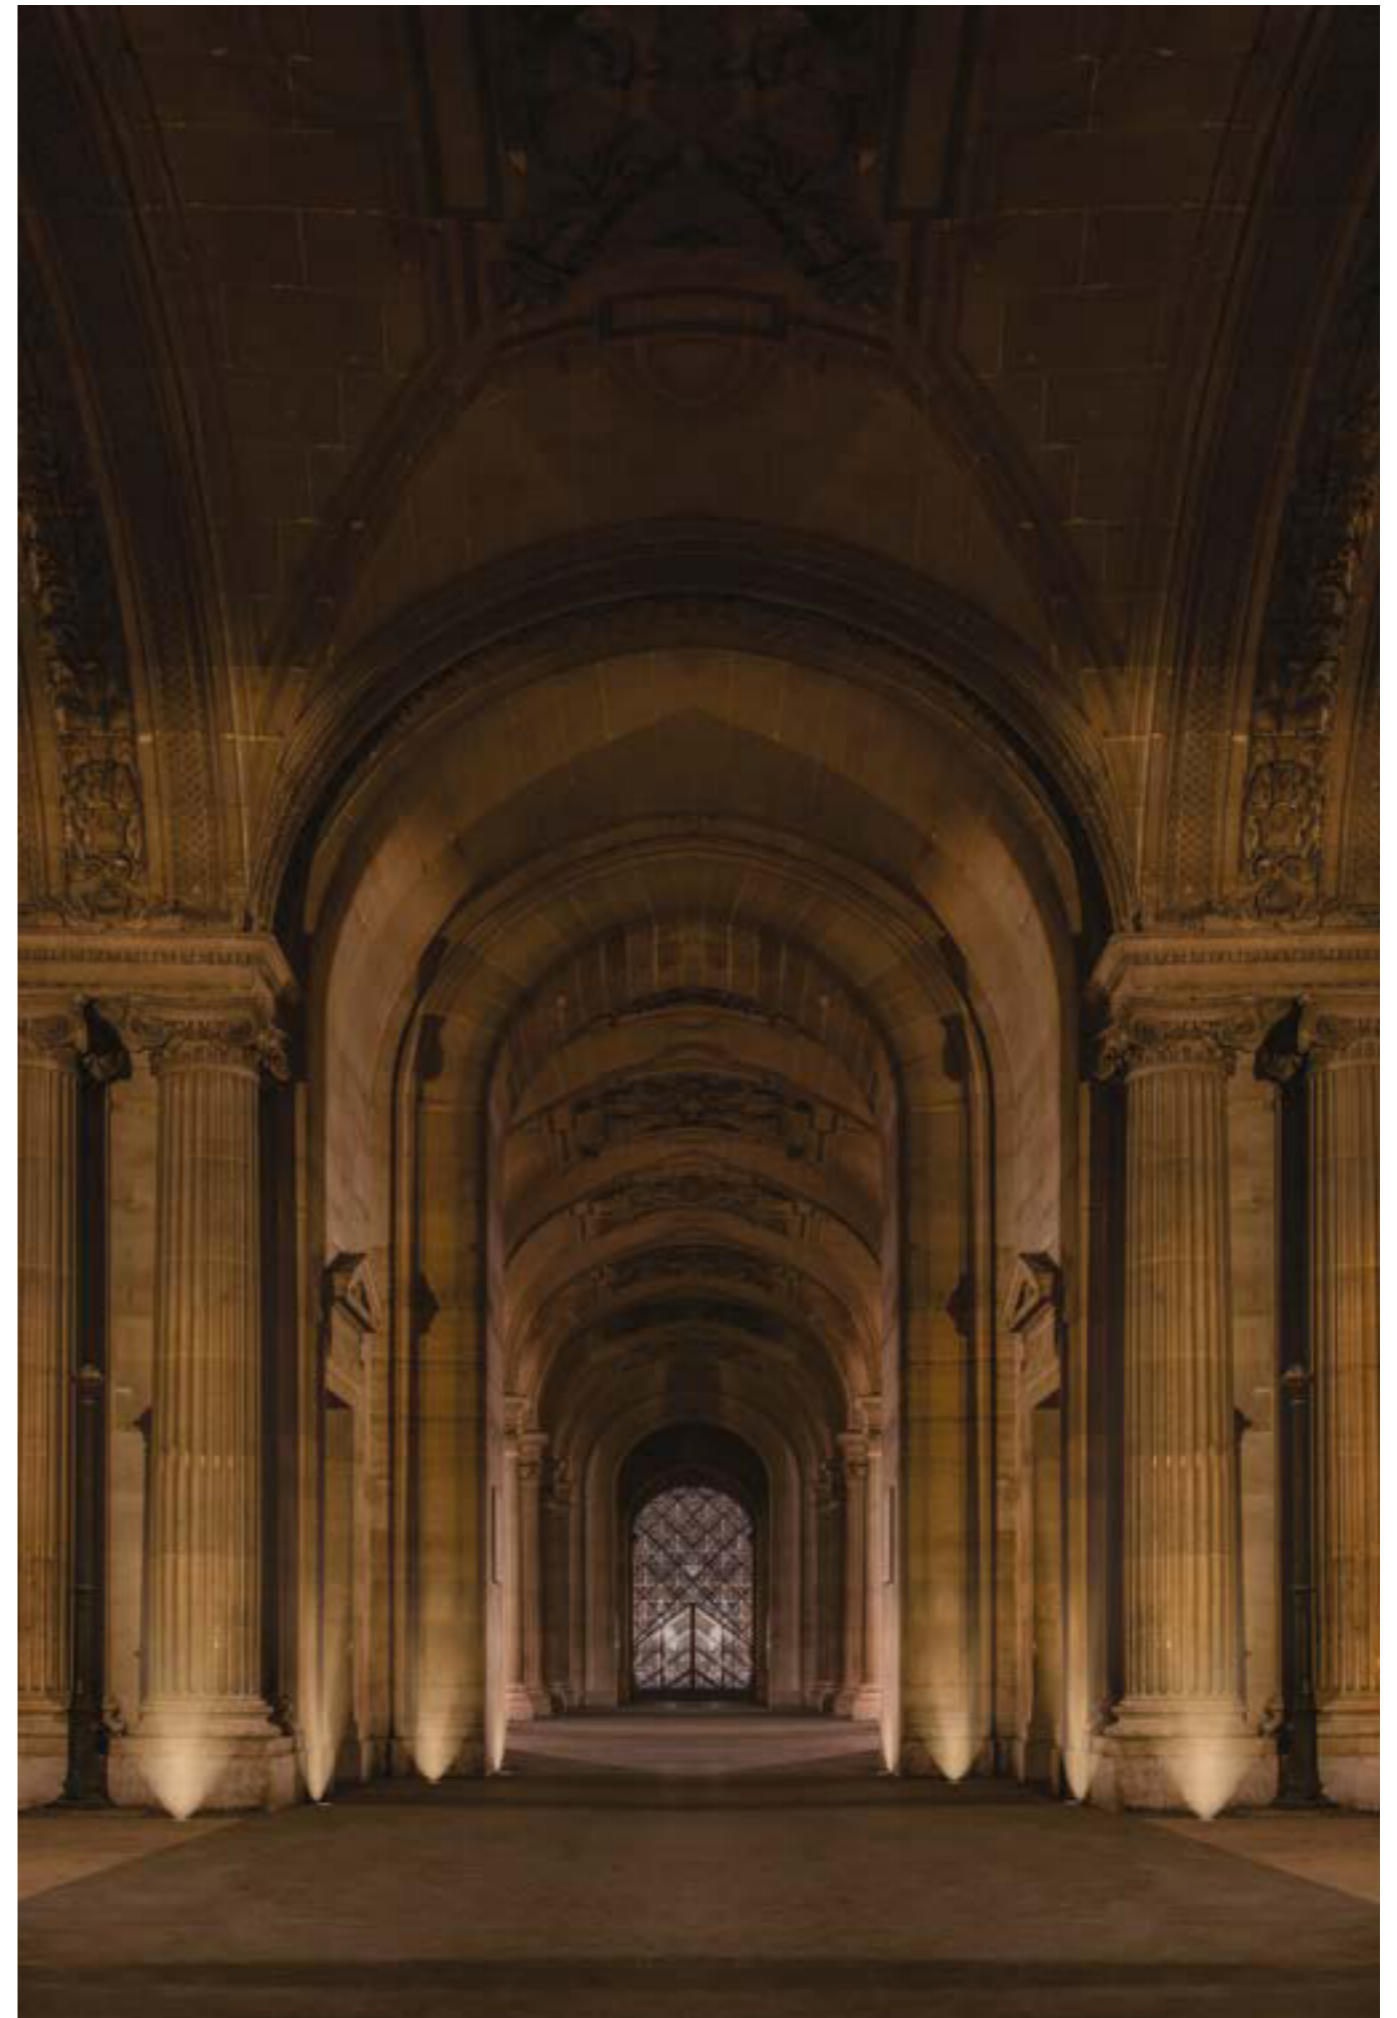


# ZEPPELIN RGB

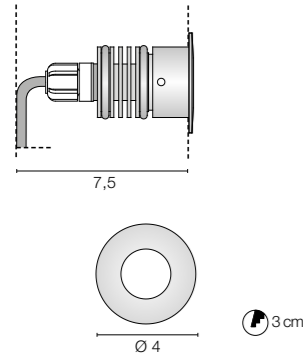

**6376.33/** 0,20 Kg

**.33** Stainless Steel AISI 316L


LED 3 x 250mA

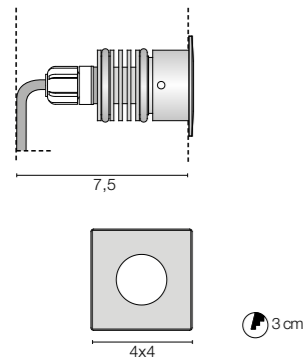

**6395.33/** 0,20 Kg

**.33** Stainless Steel AISI 316L

LED 3 x 250mA

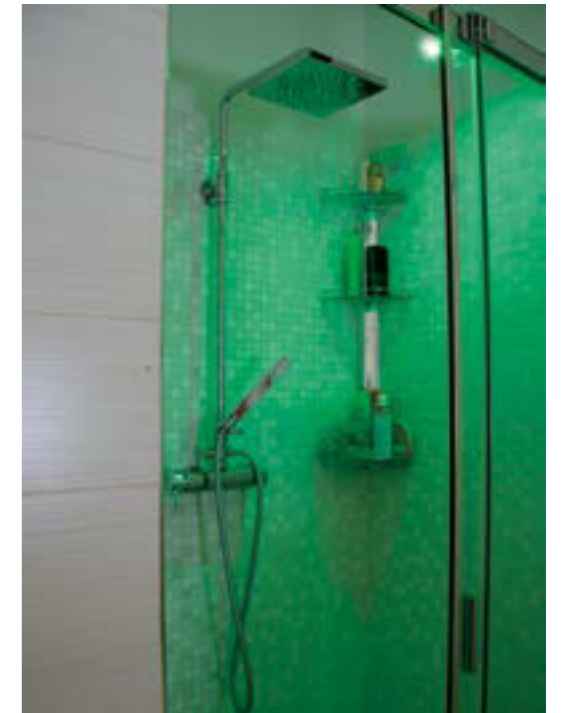

## ACCESSORIES

Kit  
**0228**

Draining junction



Box  
**0216**

Plastic box



Spring for  
plasterbox Included



3,2 cm

## DRIVERS

### DRIVER RGB

**0164**      **0167**  
120W      22W

IN 230V - OUT 3 X 24V

### DRIVER RGB CASAMBI

**0164/CASA**  
120W

IN 230V - OUT 3 X 24V

### CONVERTER RGB

**0168**  
IN 24V - OUT 3 X 250mA 1-5 Zeppelin RGB

### SENSOR & CABLE RGB


**0163**  
IR Sensor

**0165**  
IR Remote controller

**0166**  
Sync Cable




# ZEPPELIN PLUS

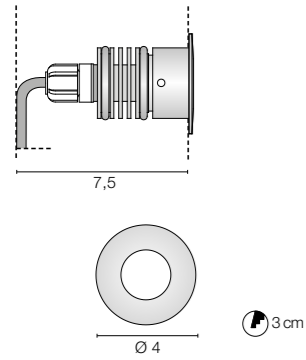

**6384.33/** 0,09 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	/11	/25	/45	max LED 1,5W 500mA	180lm
<b>/WW</b>	3000K	/11	/25	/45	max LED 1,5W 500mA	162lm
<b>/XW</b>	2700K	/11	/25	/45	max LED 1,5W 500mA	153lm

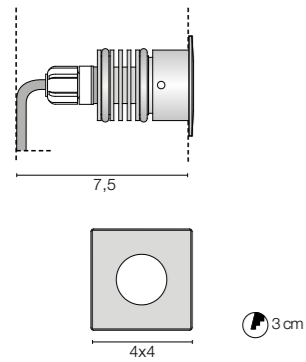

**6394.33/** 0,10 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	/11	/25	/45	max LED 1,5W 500mA	180lm
<b>/WW</b>	3000K	/11	/25	/45	max LED 1,5W 500mA	162lm
<b>/XW</b>	2700K	/11	/25	/45	max LED 1,5W 500mA	153lm



## ACCESSORIES

Kit  
**0220**

Draining junction +  
IP Connector



Box  
**0216**

Plastic box



Spring for  
plasterbox Included



3,2 cm



## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350m	500mA
<b>6384</b>	1-6	1-10	1-6
<b>6394</b>	1-6	1-10	1-6

### IP67 DRIVER


Cod.	0031/IP	0143/IP
	350mA	500mA
<b>6384</b>	1-12	1-7
<b>6394</b>	1-12	1-7

### DIMMABLE

Cod.	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>6384</b>	2-11	2-11	1-21	1-21
<b>6394</b>	2-11	2-11	1-21	1-21

Only serial connection

# ZEPPELIN MAXI

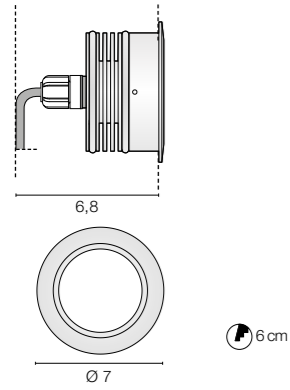


**6736.33/** 0,40 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	LED 24V 4W	658lm
<b>/WW</b>	3000K	LED 24V 4W	608lm
<b>/XW</b>	2700K	LED 24V 4W	562lm



Only Parallel connection

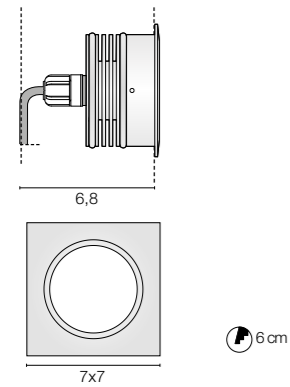

**6737.33/** 0,35 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	LED 24V 4W	658lm
<b>/WW</b>	3000K	LED 24V 4W	608lm
<b>/XW</b>	2700K	LED 24V 4W	562lm



Only Parallel connection



## ACCESSORIES

Kit  
**0230**  
Draining junction + IP Connector

Box  
**0232**  
Wall Plastic box

Spring  
**0260/C**  
Spring for plasterboard



## DRIVERS

### ON/OFF

Cod.	0155	0156
	24V - 13W	24V - 25W
<b>6736</b>	1-2	1-5
<b>6737</b>	1-2	1-5

### DIMMABLE


Cod.	0717/DIM60/V	0717/DIM60
	PUSH - 1...10V	DALI - PUSH
<b>6736</b>	1-12	1-12
<b>6737</b>	1-12	1-12

Only Parallel connection

### IP67 DRIVER


Cod.	0033/IP	0037/IP
	24V 14,4W	24V 60W
<b>6736</b>	1-2	1-12
<b>6737</b>	1-2	1-12

# ZEPPELIN MAXI COB

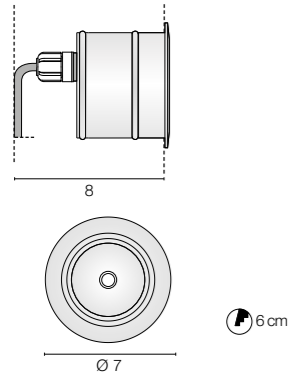

**6397.33/** 0,40 Kg

<b>.33</b>	Stainless Steel AISI 316L					
<b>/W</b>	4000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1223lm
<b>/WW</b>	3000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1156lm
<b>/XW</b>	2700K	/15	/28	/60	LED 8,7W 17,5V 500mA	1106lm

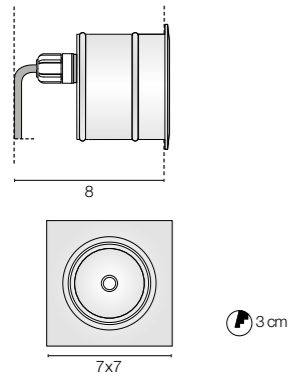

**6741.33/** 0,40 Kg

<b>.33</b>	Stainless Steel AISI 316L					
<b>/W</b>	4000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1223lm
<b>/WW</b>	3000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1156lm
<b>/XW</b>	2700K	/15	/28	/60	LED 8,7W 17,5V 500mA	1106lm



## ACCESSORIES




Kit  
**0230**  
Draining junction +  
IP Connector



Spring  
**0260/C**  
Spring for  
plasterboard

6 cm

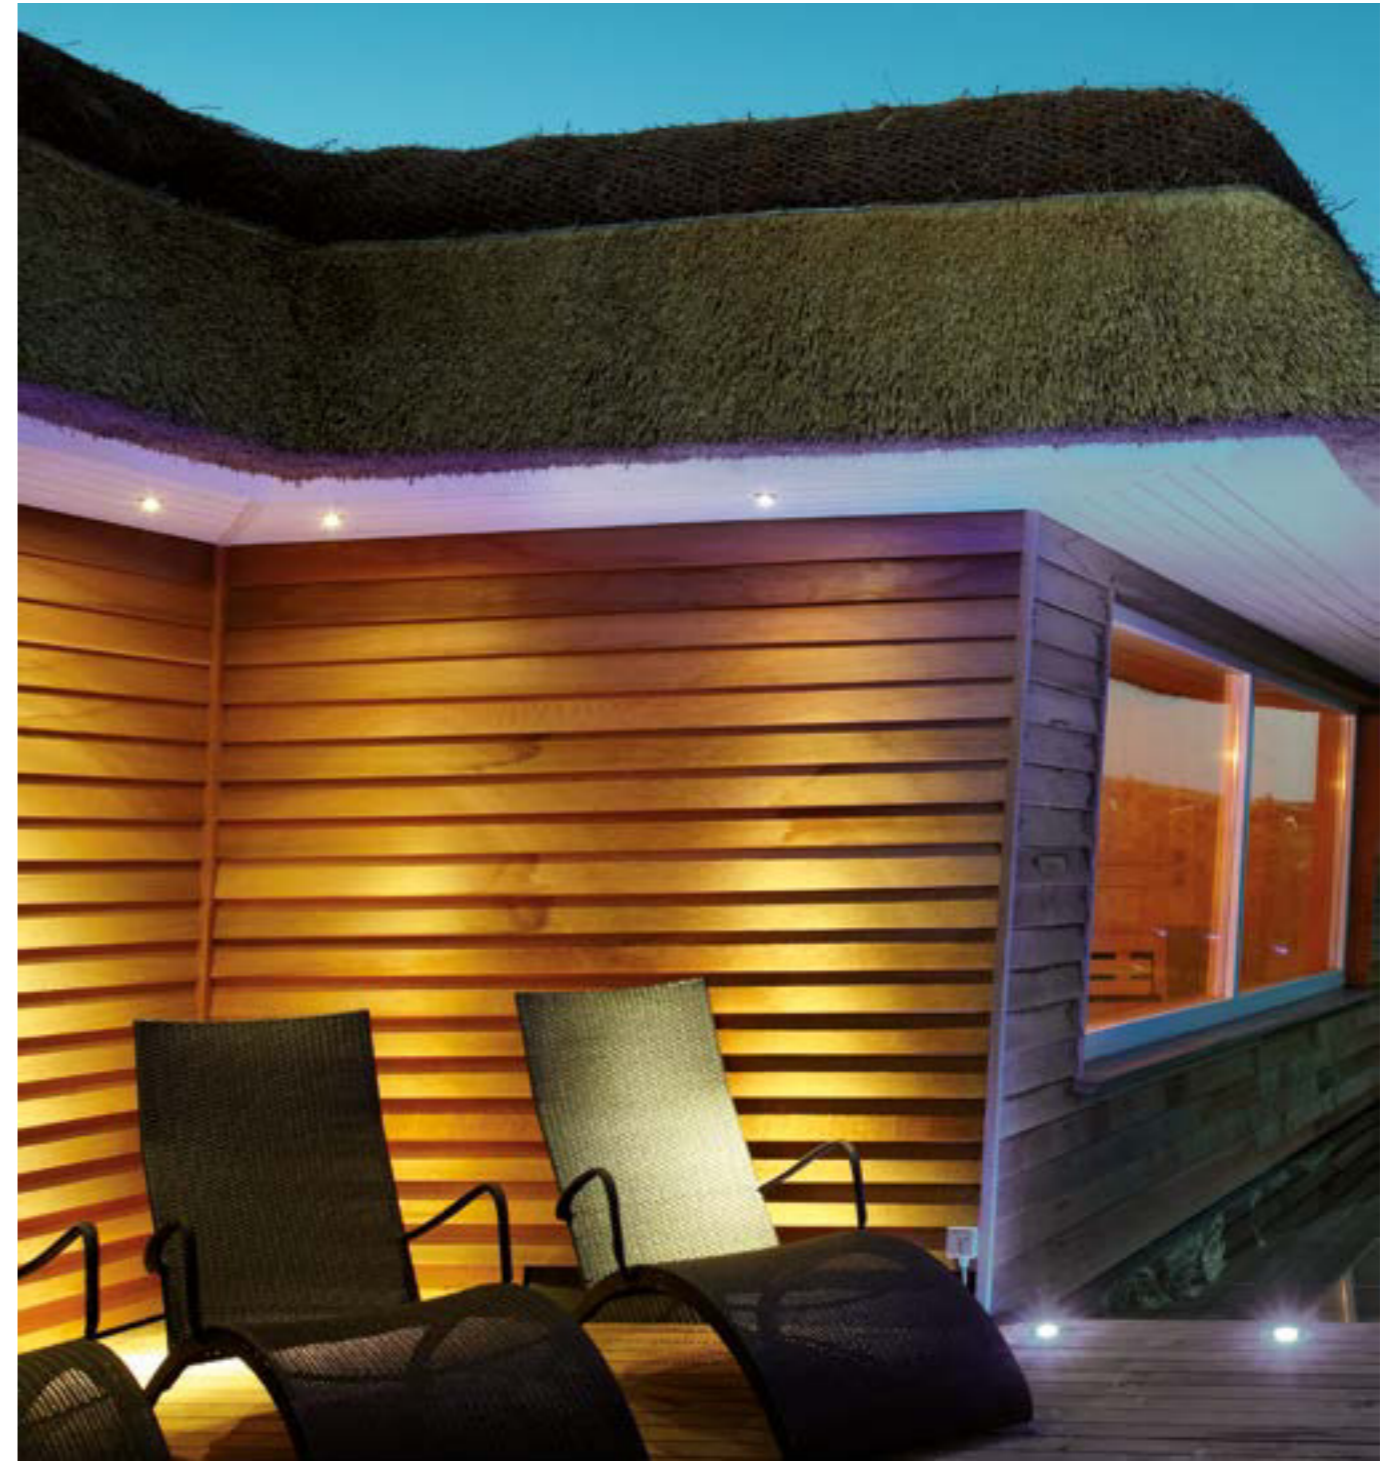

## DRIVERS

### ON/OFF

Cod.	0147/COB 500mA
<b>6397</b>	1-2
<b>6741</b>	1-2

### IP67 DRIVER


Cod.	0143/IP 500mA
<b>6397</b>	1
<b>6741</b>	1

### DIMMABLE

Cod.	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
<b>6397</b>	1-2	1-2	1-3	1-3
<b>6741</b>	1-2	1-2	1-3	1-3

Only serial connection


# ZEPPELIN MINI

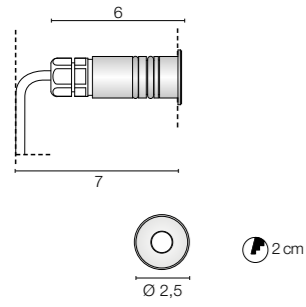

**6730.33/** 0,05 Kg

**.33** Stainless Steel AISI 316L


<b>/W</b>	4000K	LED 1W 350mA	129lm
<b>/WW</b>	3000K	LED 1W 350mA	117lm
<b>/XW</b>	2700K	LED 1W 350mA	110lm

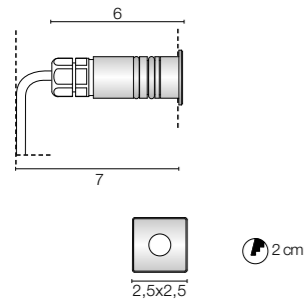

**6731.33/** 0,06 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	LED 1W 350mA	129lm
<b>/WW</b>	3000K	LED 1W 350mA	117lm
<b>/XW</b>	2700K	LED 1W 350mA	110lm

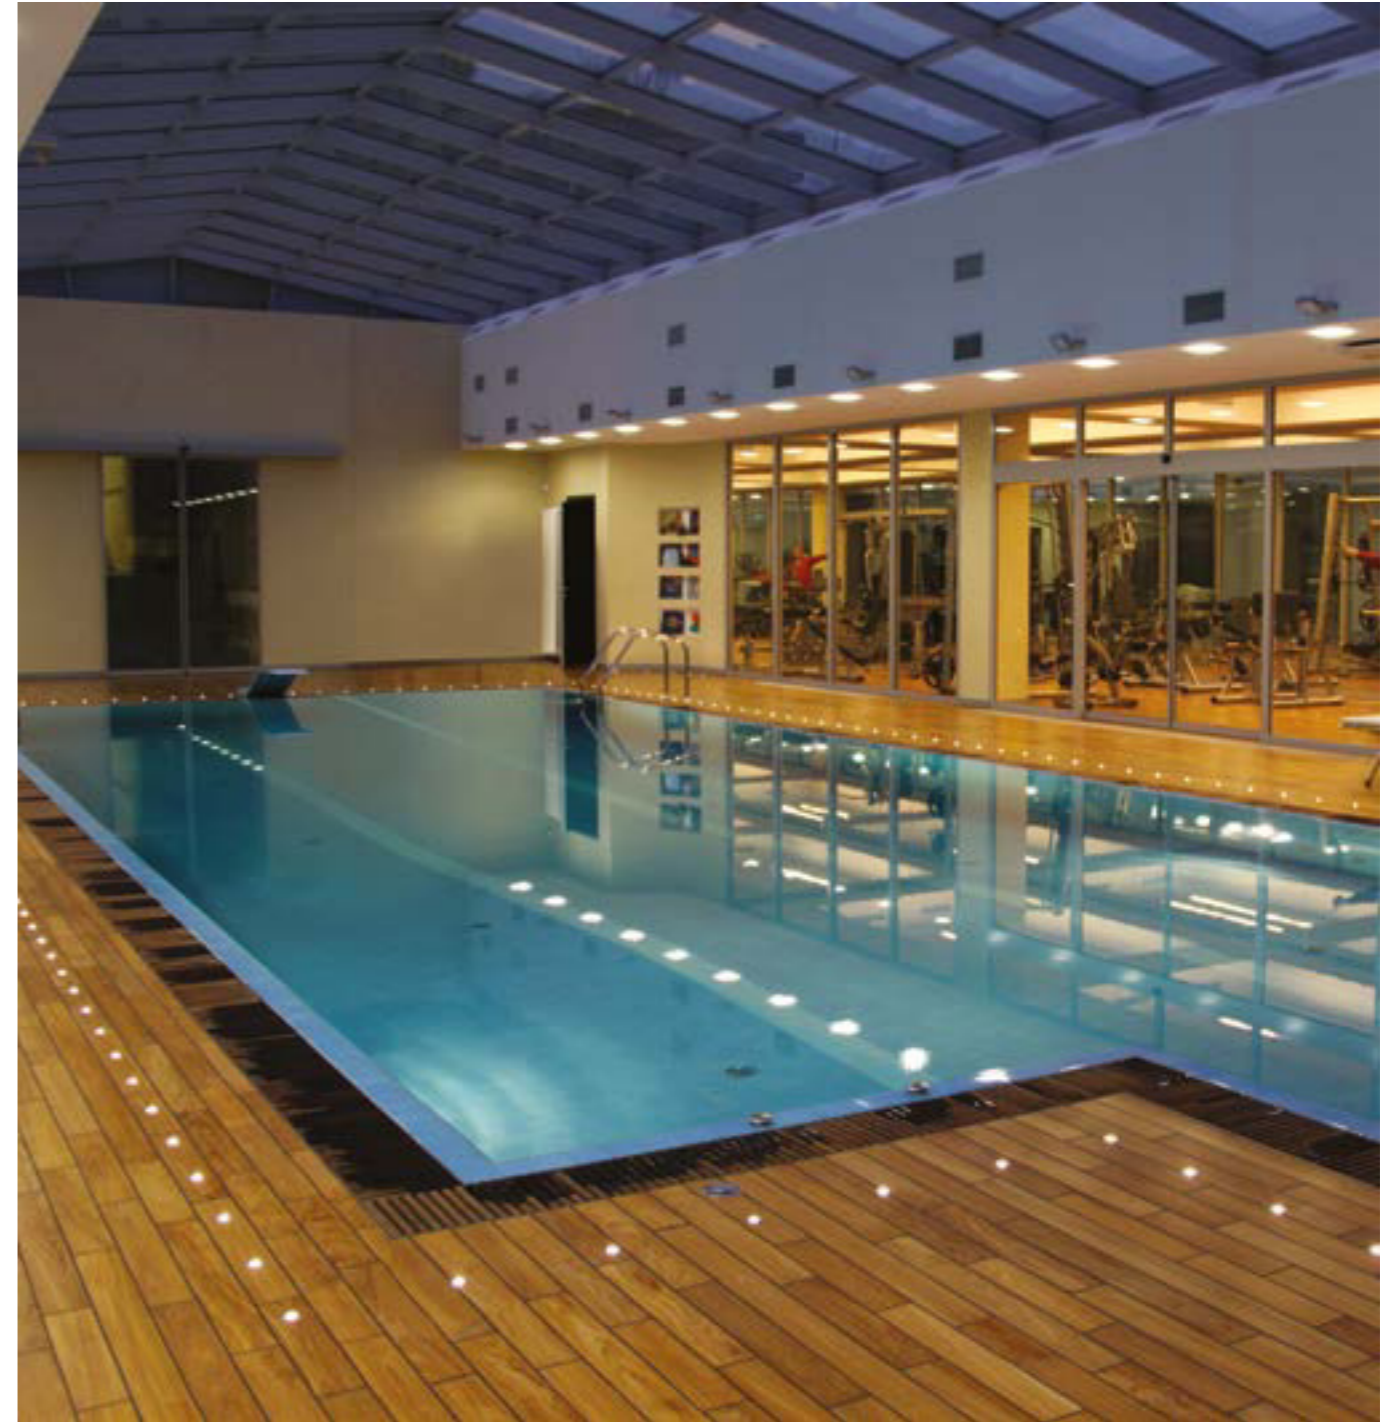

## ACCESSORIES

Box  
**0215**

Plastic box



Spring for  
plasterboard included



2,2 cm

## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA
<b>6730</b>	1-6	1-10
<b>6731</b>	1-6	1-10

### IP67 DRIVER


Cod.	0031/IP 350mA
<b>6730</b>	1-12
<b>6731</b>	1-12

### DIMMABLE

Cod.	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
<b>6730</b>	5-14	4-14	1-21	1-21
<b>6731</b>	5-14	4-14	1-21	1-21

Only Serial connection


# ZEPPELIN MINI PLUS



**6732.33/** 0,05 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	/11	/25	/45	LED 1W 350mA	129lm
<b>/WW</b>	3000K	/11	/25	/45	LED 1W 350mA	117lm
<b>/XW</b>	2700K	/11	/25	/45	LED 1W 350mA	110lm

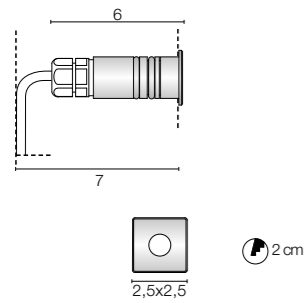

**6733.33/** 0,06 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	/11	/25	/45	LED 1W 350mA	129lm
<b>/WW</b>	3000K	/11	/25	/45	LED 1W 350mA	117lm
<b>/XW</b>	2700K	/11	/25	/45	LED 1W 350mA	110lm



## ACCESSORIES

Box  
**0215**

Plastic box



Spring for  
plasterboard included



2,2 cm

## DRIVERS

### ON/OFF

Cod.	0125	0128
	350mA	350mA
<b>6732</b>	1-6	1-10
<b>6731</b>	1-6	1-10

### IP67 DRIVER



Cod.	0031/IP
	350mA
<b>6732</b>	1-12
<b>6733</b>	1-12

### DIMMABLE

Cod.	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>6732</b>	5-14	4-14	1-21	1-21
<b>6733</b>	5-14	4-14	1-21	1-21

Only Serial connection

# ZEPPELIN ADJUSTABLE



6 cm



**6411.33/** 0,22 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	/11	/25	/45	max LED 1,5W 500mA	180lm
<b>/WW</b>	3000K	/11	/25	/45	max LED 1,5W 500mA	162lm
<b>/XW</b>	2700K	/11	/25	/45	max LED 1,5W 500mA	153lm



## ACCESSORIES

Kit  
**0230**

Draining junction +  
IP Connector



Box  
**0232**

Wall Plastic box



Spring  
**0238**

Spring for  
plasterboard



## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6411</b>	1-6	1-10	1-6

### IP67 DRIVER

Cod.	0031/IP	0143/IP
	350mA	500mA
<b>6411</b>	1-12	1-7

### DIMMABLE

Cod.	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>6411</b>	2-11	2-11	1-21	1-21

Only serial connection



OUTDOOR

# JAZZ

Design FEB Rienzi





## JAZZ




IP65 diffused light outdoor lamp for ceiling or wall installation with anodised aluminium body and reflector, satin methacrylate diffuser and latest generation 3000K LED module at 220/240V mains voltage. The simple line gives it an appearance that is well suited to any type of environment, from classic to modern, and to any type of context, from residential to tourist accommodation.

*Lampada da esterno IP65 a luce diffusa per installazione a plafone o a parete con corpo e riflettore in alluminio anodizzato, diffusore in metacrilato satinato e modulo LED di ultima generazione a 3000K a tensione di rete 220/240V. La linea semplice le conferisce un aspetto che bene si adatta a qualsiasi tipo di ambiente, da quelli classici a quelli moderni e a qualsiasi tipo di contesto, dal residenziale a quello ricettivo turistico.*

*IP65-Außenleuchte mit diffusem Licht für die Decken- oder Wandmontage mit Gehäuse und Reflektor aus eloxiertem Aluminium, Diffusor aus satiniertem Methacrylat und LED-Modul der neuesten Generation mit 3000 K bei 220/240 V Netzspannung. Die schlichte Linie verleiht ihr ein Erscheinungsbild, das sich für jede Art von Umgebung eignet, von klassisch bis modern, und für jede Art von Kontext, vom Wohnbereich bis zur Touristenunterkunft.*


# JAZZ

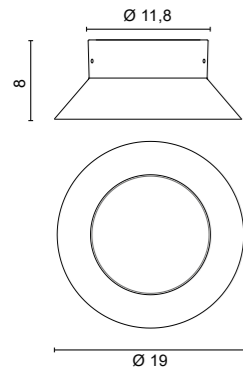


**5538** 0,60 Kg

- .01 White
- .02 Black
- .38 Shiny Copper

/WW 3000K LED 8W 592lm



## FINISHES CODES

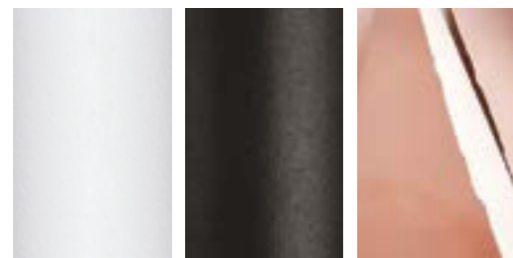

.01 White .02 Black .38 Shiny Copper





OUTDOOR

**ROC**

Design FEB Rienzi





## ROC



IP65 outdoor lamp for wall or ceiling installation with latest generation 3000K 592lm LED module at 220/240V mains voltage.

Die-cast aluminium structure with thick anodising treatment and matt white polyester paint finish. The outer diffuser is in moulded, ground, transparent glass, the inner one in satin-finish methacrylate. Stainless steel screws and silicone seals.

Roc is designed for lighting outdoor spaces, porches, terraces and all open architectural environments exposed to the weather. The essential line and the quality of the materials also make it suitable for indoor environments such as bathrooms and rooms where an IP44 or higher degree of protection is required.

The mains-voltage powered LED light source, protected by an opal screen, provides all the high efficiency and energy-saving advantages of the technology, while at the same time guaranteeing diffuse and pleasant direct light.

The luminaire is supplied with an additional seal that forms a barrier to insect penetration between the glass and the inner body.

*Lampada da esterno IP65 per installazione a parete o plafone con modulo LED di ultima generazione 3000K da 592lm a tensione di rete 220/240V.*

*Struttura in alluminio pressofuso con trattamento di anodizzazione in spessore e verniciatura in poliestere bianco opaco. Il diffusore esterno è in vetro trasparente stampato, molato e sfaccolato, quello interno in metacrilato satinato. Viti in acciaio INOX e guarnizioni di tenuta siliconiche.*

*Roc è pensata per l'illuminazione di spazi esterni, porticati, terrazze e tutti gli ambienti architettonici aperti, esposti agli agenti atmosferici. La linea essenziale e la qualità dei materiali la rendono adatta anche per ambienti interni come bagni e locali dove è richiesto un grado di protezione IP44 o superiore.*

*La sorgente luminosa LED alimentata a tensione di rete, protetta da uno schermo opalino, permette di avere tutti i vantaggi di alta efficienza e risparmio energetico della tecnologia e al tempo stesso garantisce una luce diretta diffusa e gradevole.*

*La lampada è fornita con una guarnizione supplementare che costituisce una barriera per la penetrazione di insetti tra vetro e corpo interno..*

*IP65-Außenleuchte für Wand- oder Deckenmontage mit LED-Modul der neuesten Generation mit 3000K und 592lm bei 220/240V Netzspannung.*


*Struktur aus druckgegossenem Aluminium mit starker Eloxierung und matweißer Polyesterlackierung. Der äußere Diffusor besteht aus geschliffenem, transparentem Glas, der innere aus satiniertem Methacrylat. Schrauben aus rostfreiem Stahl und Silikondichtungen.*

*Roc ist für die Beleuchtung von Außenbereichen, Veranden, Terrassen und allen offenen architektonischen Umgebungen, die dem Wetter ausgesetzt sind, konzipiert. Aufgrund ihrer klaren Linie und der Qualität der Materialien eignet sie sich auch für Innenräume wie Bäder und Zimmer, in denen ein Schutzgrad von IP44 oder höher erforderlich ist.*

*Die netzgespeiste LED-Lichtquelle, die durch eine opale Abschirmung geschützt ist, bietet alle Vorteile dieser Technologie in Bezug auf Effizienz und Energieeinsparung, während sie gleichzeitig ein diffuses und angenehmes direktes Licht garantiert.*

*Die Leuchte wird mit einer zusätzlichen Dichtung geliefert, die eine Barriere gegen das Eindringen von Insekten zwischen dem Glas und dem Innenkörper bildet.*

# ROC

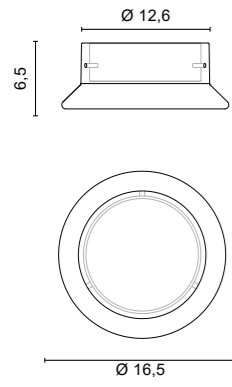


<b>5539</b>		1,50 Kg
.01	White	
/WW	3000K LED 8W	592lm
F	IP65	CRI >90



## FINISHES CODES



.01 White

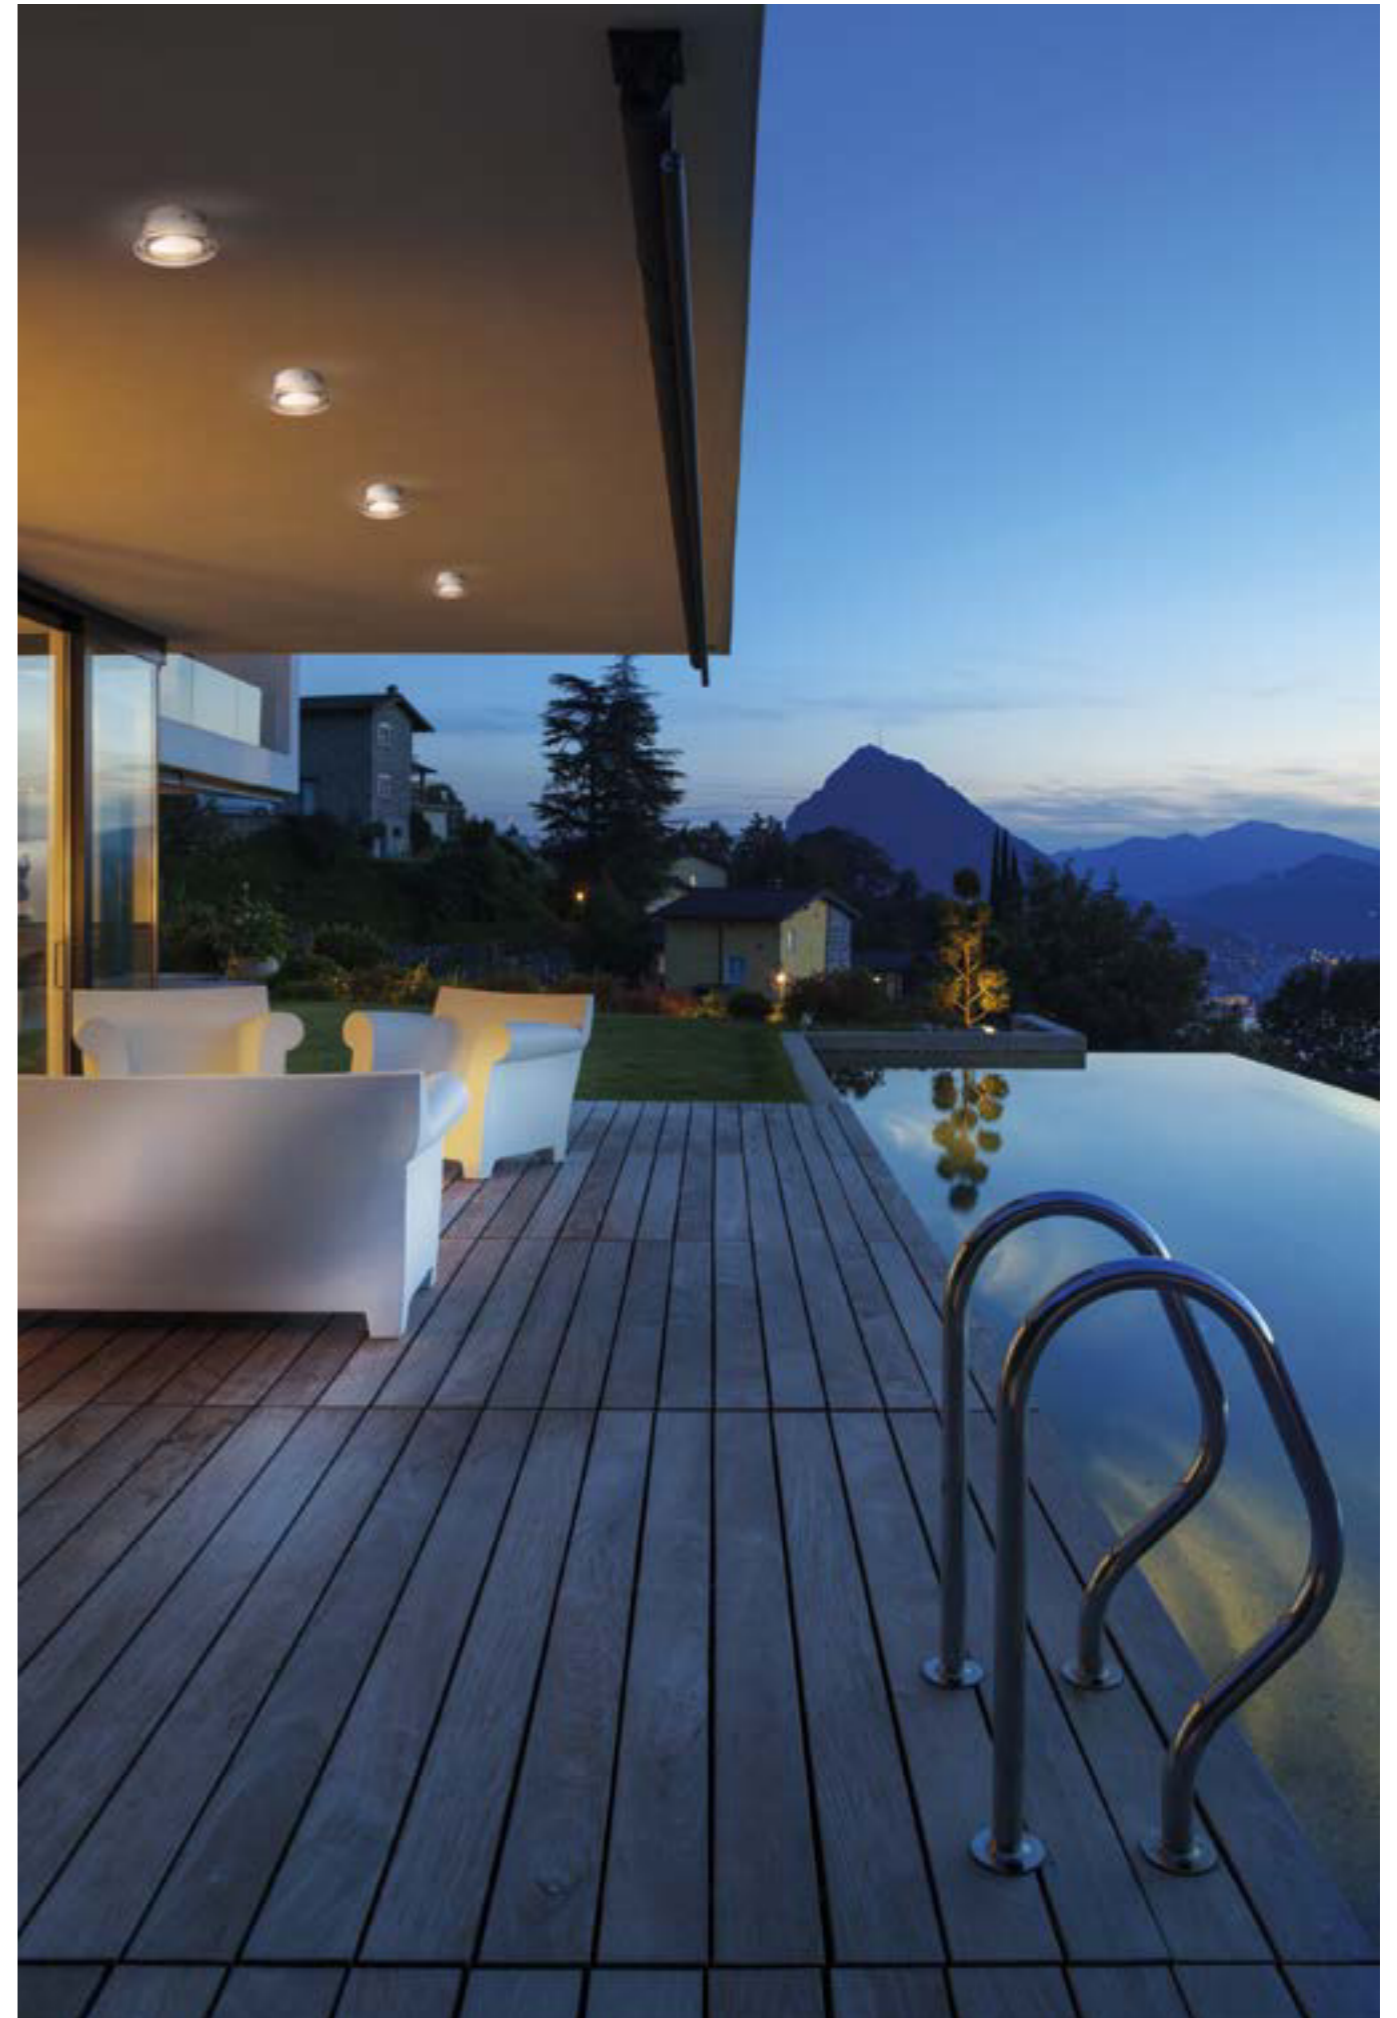



OUTDOOR

# DRUM

Design UT EgoLuce





## DRUM



IP65 ceiling or wall lamp with an anodised aluminium structure and reinforced outdoor finish, methacrylate diffuser and 8W 220-240V LED module.

The simple line gives it an appearance that is well suited to any type of environment, from classic to modern interiors and any type of context, from residential to tourist accommodation.


*Lampada da plafone o parete IP65 con struttura in alluminio anodizzato e finitura rinforzata per esterno, diffusore in metacrilato e modulo LED 8W 220-240V.*

*La linea semplice le conferisce un aspetto che bene si adatta a qualsiasi tipo di ambiente, dagli interni classici a quelli moderni e a qualsiasi tipo di contesto, dal residenziale a quello ricettivo turistico.*

*Decken- oder Wandleuchte IP65 mit Struktur aus eloxiertem Aluminium und verstärkter Oberfläche für den Außenbereich, Diffusor aus Methacrylat und LED-Modul 8W 220-240V.*

*Die schlichte Linie verleiht ihr ein Erscheinungsbild, das sich für jede Art von Umgebung eignet, von klassischen bis zu modernen Innenräumen und jeder Art von Kontext, von Wohn- bis zu Touristenunterkünften.*


# DRUM

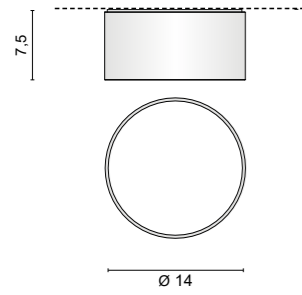

**5520** 1,30 Kg

**.01** White

**/WW** 3000K LED 8W 592lm



## FINISHES CODES



**.01** White





Our fittings are manufactured in conformity with the european standard CEI-EN 60598 and, consequently, get the mark CE.

*Nos appareils sont fabriqués en conformité aux règles européennes CEI-EN 60598 et, par conséquent, fournis avec marque CE.*

*Unsere Produkte werden gemäss europäischer Norm CEI-EN 60598 hergestellt und sind als solche mit dem CE-Zeichen gekennzeichnet.*

Egoluce s.r.l. reserves the right to change, at any time and without prior warning, the technical specification of any product illustrated in this catalogue.  
Colours are simply indicative of the real nuance.

*Egoluce s.r.l. se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.  
Les couleurs sont simplement a titre indicatif.*

*Egoluce s.r.l. behält sich vor, jederzeit und fristlos die in beiliegendem Katalog erläuterten technischen Daten zu ändern.  
Die Farben sind nicht genau wirklichkeitsgetreu.*



---

**EDITION**  
2024 © All rights reserved

**PHOTOS**  
Bordegoni S.r.l.  
U.T. Egoluce



MADE IN ITALY

**EGOLUCE s.r.l.**

Via I. Newton, 12 - 20016 Pero - Milano - Italy

Tel. +39 02339586.1

E-mail: [export@egoluce.com](mailto:export@egoluce.com) - Int. E-mail: [infoworld@egoluce.com](mailto:infoworld@egoluce.com)

[www.egoluce.com](http://www.egoluce.com)