

VIBIA

VIBIA

Recommended sales prices - VAT
not included in this price list updates
models and finishes in production,
which may differ from photographs
published in catalogue.






Index

- Africa
326
- Algorithm Grid
70
- Algorithm Free
80
- Alpha
498
- Array
130
- Balance
302
- Bamboo
282
- Bigger
240
- Bind
428
- Bind Solo
446
- Break
250
- Break Plus
252
- Brisa
266
- Circle
190
- Circus
10
- Circus Solo
28
- Class
184
- Cosmos
174
- Dama
186
- Dots
268
- Dots Glass
272
- Dots Outdoor
274
- Duo
286
- Duo Petra
290
- Empty
254
- Flamingo
96
- Flamingo Mini
100
- Flat
358
- Funnel
142
- Ghost
298
- Guise
152
- Halo
158
- Halo Jewel
168
- I.Cono
68
- Jazz
94
- June
280
- Knit
488
- Kontorno
422
- Lily
342
- Line
200
- Match
500
- Mayfair
318
- Mayfair Mini
316
- Meridiano
278
- Musa
486
- North
330
- Offset
112
- Origami
260
- Out
256
- Palma
232
- Palo Alto
264
- Pin
104
- Plusminus
386
- Plusminus Solo
414
- Puck
304
- Puck Wall Art
308
- Rhythm Horizontal
144
- Rhythm Vertical
149
- Set
496
- Skan
40
- Slim
84
- Spa
370
- Sticks
464
- Sticks Solo
476
- Structural
178
- Suite
376
- Tempo
346
- Top
92
- Tube Free
380
- Up
258
- Warm
294
- Wind
246
- Wireflow
48
- Wireflow Chandelier
64
- Wireflow Free
58
- Wireflow Lineal
54
-
- Item coding
8
- Light source
503
- Glossary
504
- Lighting control systems
505

Item coding

Some pendant models offer different electrical connection typology, these will require additional coding.

Reference

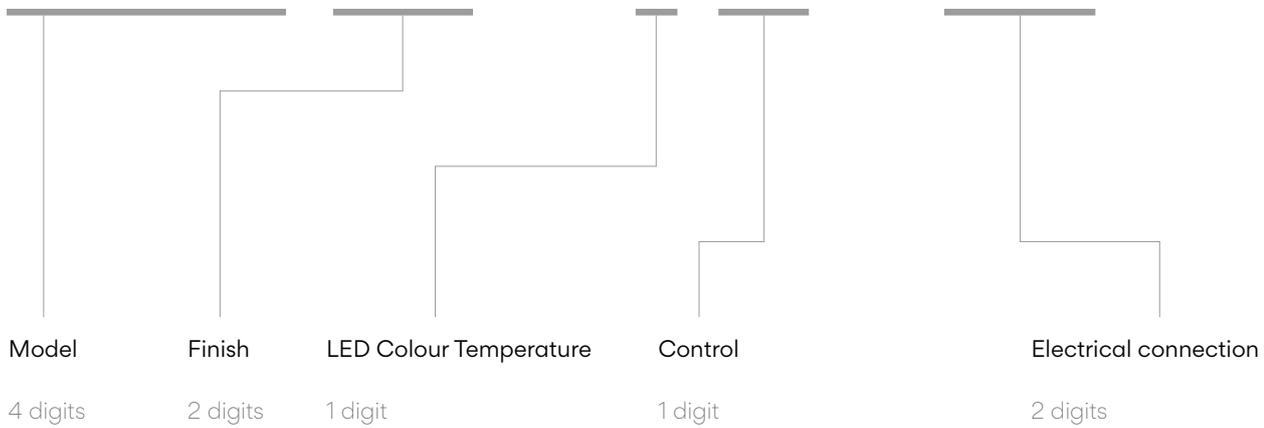

Model

Finish

LED Colour Temperature

Control

Electrical connection

4 digits

2 digits

1 digit

1 digit

2 digits

Type

Model

- 0 Without LED
- 1 2700 K
- 2 3000 K
- 3 3500 K
- 4 4000 K
- 7 2200 K
- 8 Tunable White
- 9 Tunable Red
- A Infinite Colour (TW + RGB)
- F Dim-To-Warm

- 0 On/ Off
- 1 DALI-2
- 2 0-10V
- 3 1-10V
- 4 TRIAC
- 5 Push
- 6 Sensor
- 7 Lutron
- 8 Push 2
- A Push; 1-10V; DALI-2
- B Push; 1-10V
- C 1-10V; DALI-2
- D Push; DALI-2
- E Casambi PTP; On/ Off
- F Simultaneous line Push 1-10V; DALI-2; Casambi
- G DALI; Casambi; ProtoPixel
- M Without driver
- W Wiz
- Y ProtoPixel
- Z Casambi *

- 1 Surface
- 2 Built-in
- 3 Remote
- 4 Bolt-down

- 0 Basic
- 1 Micro
- 2 XXS
- 3 XS
- 4 S
- 5 M
- 6 L
- 8 Free Wire
- 9 Mud kit

* Casambi refers to wireless dimming solutions. Ask for more information.



Circus

Design by Antoni Arola

Circus is defined by its minimalist structure and signature conductive bar, delicately balanced by opposing elements to create a festival of light. A creative toolkit full of possibilities to explore and enjoy that offers total freedom of composition, multiple components and a myriad of diffuse and accented lighting effects.

Pendant Ceiling - Volumetric Diffuser

PENDANT



DIRECT TO TRACK



0162

- Finishes**
- 11/ __ Black
(NCS S 8500-N)
 - 24/ __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 759 lm
 - /2 _ 3000 K - 794 lm
 - /3 _ 3500 K - 822 lm


- Tunable White**
- /8 _ (1800 K - 4000 K)
452 lm - 709 lm

- Tunable Red**
- /9 _ (Red - 2700 K)
172 lm - 468 lm

CRI >90

Control

- 0162 __ / __
- __ / _ 1 Static White + DALI-2 (P2P)
 - __ / _ Y Static White + ProtoPixel* (P2P)
 - __ / _ Z Static White + Casambi (P2P)
 - __ / 8Y Tunable White + ProtoPixel* (P2P)
 - __ / 8Z Tunable White + Casambi (P2P)
 - __ / 9Y Tunable Red + ProtoPixel* (P2P)
 - __ / 9Z Tunable Red + Casambi (P2P)



Materials

Sphere: PE- Polyethylene.
Top cover: Aluminum. Track adapter: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,7 W 400 mA

Tunable White:
1 x LED 6,7 W 385 mA

Tunable Red:
1 x LED PLATE 7,7 W 400 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,16 Kg Net weight 0,53 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Extra cable length.



0164

- Finishes**
- **11/ _ _ Black**
(NCS S 8500-N)
 - **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 759 lm
[F] →
/2 _ 3000 K - 794 lm
/3 _ 3500 K - 822 lm
[E] →

Tunable White
/8 _ (1800 K - 4 000 K)
452 lm - 709 lm

Tunable Red
/9 _ (Red - 2700 K)
172 lm - 468 lm
[F] →
CRI >90

Control
0164 _ _ / _ _

- _ _ / _ 1 Static White + DALI-2 (P2P)
- _ _ / _ Y Static White + ProtoPixel* (P2P)
- _ _ / _ Z Static White + Casambi (P2P)
- _ _ / 8Y Tunable White + ProtoPixel* (P2P)
- _ _ / 8Z Tunable White + Casambi (P2P)
- _ _ / 9Y Tunable Red + ProtoPixel* (P2P)
- _ _ / 9Z Tunable Red + Casambi (P2P)



Materials

Sphere: PE- Polyethylene. Top cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,7 W 400 mA

Tunable White:
1 x LED 6,7 W 385 mA

Tunable Red:
1 x LED PLATE 7,7 W 400 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,16 Kg Net weight 0,53 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



0167

- Finishes**
- **11/ _ _ Black**
(NCS S 8500-N)
 - **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature


Static White
/1 _ 2700 K - 2588 lm
/2 _ 3000 K - 2706 lm
/3 _ 3500 K - 2804 lm

Tunable White
/8 _ (1800 K - 4000 K)
1403 lm - 2615 lm
[E] →

Tunable Red
/9 _ (Red - 2700 K)
339 lm - 1582 lm
[F] →
CRI >90

Control
0167 _ _ / _ _

- _ _ / _ 1 Static White + DALI-2 (P2P)
- _ _ / _ Y Static White + ProtoPixel* (P2P)
- _ _ / _ Z Static White + Casambi (P2P)
- _ _ / 8Y Tunable White + ProtoPixel* (P2P)
- _ _ / 8Z Tunable White + Casambi (P2P)
- _ _ / 9Y Tunable Red + ProtoPixel* (P2P)
- _ _ / 9Z Tunable Red + Casambi (P2P)

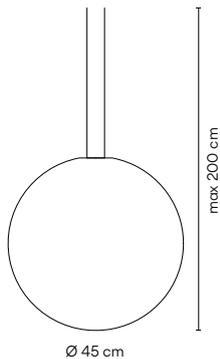

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.
Track adapter: PC- Polycarbonate .

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 19,6 W 600 mA

Casambi:
1 x LED 15,7 W 485 mA

Tunable White:
1 x LED 17,7 W 525 mA


Tunable Red:
1 x LED PLATE 15,7 W 500 mA

Packaging

1 Box 0,55 x 0,55 x 0,65 m
Vol 0,1966 m³
Gross weight 4,6 Kg Net weight 2,35 Kg

Notes


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Static White + Casambi; ProtoPixel -18% Flux.
Extra cable length.



Pendant Ceiling - Hidden Diffuser

PENDANT

0155

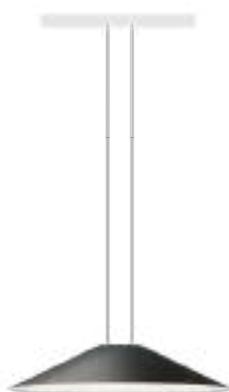

Ø 40 cm

DIRECT TO TRACK

0157



Ø 40 cm

0155

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 1763 lm

/2 _ 3000 K - 1843 lm

E →

/3 _ 3500 K - 1910 lm

D →

Tunable White

/8 _ (1800 K - 4000 K)

1340 lm - 2501 lm

D →

Tunable Red

/9 _ (Red - 2700 K)

339,6 lm - 1582 lm



F →

CRI >90

Control

0155 _ _ / _ _

_ _ / _ 1 Static White + DALI-2 (P2P)

_ _ / _ Y Static White +
ProtoPixel* (P2P)_ _ / _ Z Static White +
Casambi (P2P)_ _ / 8Y Tunable White +
ProtoPixel* (P2P)_ _ / 8Z Tunable White +
Casambi (P2P)_ _ / 9Y Tunable Red +
ProtoPixel* (P2P)_ _ / 9Z Tunable Red +
Casambi (P2P)

Ø 40 cm

Materials

Shade: Aluminum. Top cover: Aluminum.

Diffuser: PC- Polycarbonate.

Track adapter: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED PLATE 12,8 W 400 mA

Tunable White:

1 x LED 16,8 W 500 mA

Tunable Red:

1 x LED PLATE 15,7 W 500 mA

Packaging

1 Box 0,480 x 0,480 x 0,115 m


Vol 0,0265 m³

Gross weight 2,5 Kg Net weight 0,92 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


Extra cable length.





0157

- Finishes**
- 11/ _ _ Black (NCS S 8500-N)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)



- LED Colour Temperature**
- Static White**
- /1 _ 2700 K - 1763 lm
 - /2 _ 3000 K - 1843 lm
 - /3 _ 3500 K - 1910 lm
- Tunable White**
- /8 _ (1800 K - 4000 K) 1340 lm - 2501 lm
- Tunable Red**
- /9 _ (Red - 2700 K) 339,6 lm - 1582 lm
- CRI >90

Control

- 0157 _ _ / _ _
- _ _ / _ 1 Static White + DALI-2 (P2P)
 - _ _ / _ Y Static White + ProtoPixel* (P2P)
 - _ _ / _ Z Static White + Casambi (P2P)
 - _ _ / 8Y Tunable White + ProtoPixel* (P2P)
 - _ _ / 8Z Tunable White + Casambi (P2P)
 - _ _ / 9Y Tunable Red + ProtoPixel* (P2P)
 - _ _ / 9Z Tunable Red + Casambi (P2P)

Materials

Shade: Aluminum. Top cover: PC- Polycarbonate.
 Diffuser: PC- Polycarbonate.
 Track adapter: PC- Polycarbonate.

Light Source and electronics

- 2700 K - 3000 K - 3500K:**
 1 x LED PLATE 12,8 W 400 mA
- Tunable White:**
 1 x LED 16,8 W 500 mA
- Tunable Red:**
 1 x LED 15,7 W 500 mA

Packaging

1 Box 0,480 x 0,480 x 0,115 m
 Vol 0,0265 m³
 Gross weight 2,5 Kg Net weight 0,92 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



Pendant Ceiling - Accent Spotlight

PENDANT

- 0140 Narrow
- 0141 Medium
- 0142 Wide



SPOTS

Only in pendant tracks

- 0130 Narrow
- 0131 Medium
- 0132 Wide



SIDE-SPOTS

Only in ceiling tracks

- 0135 Narrow
- 0136 Medium
- 0137 Wide



- 0140 Narrow
- 0141 Medium
- 0142 Wide

0140 Narrow

- Finishes
- 11/ _ _ Black (NCS S 8500-N)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)

- LED Colour Temperature
- /1_ 2700 K - 680 lm
 - /2_ 3000 K - 711 lm
 - /3_ 3500 K - 737 lm
- ⏏
- CRI >90

Control

- 0140 _ _ / _ _
-
- _ _ / _ 1 Static White + DALI-2 (P2P)
 - _ _ / _ Y Static White + ProtoPixel* (P2P)
 - _ _ / _ Z Static White + Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA



Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Extra cable length.



O141 Medium

- Finishes**
 ● **11/** __ Black
 (NCS S 8500-N)
 ● **24/** __ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
 /1 _ 2700 K - 680 lm
 /2 _ 3000 K - 711 lm
 /3 _ 3500 K - 737 lm
Tunable White
 /8 _ (1800 K - 4000 K)
 308 lm - 504 lm
 F →
Tunable Red
 /F _ (Red - 2700 K)
 147 lm - 535 lm
 G →
 CRI >90

Control
O141 __ / __
 __ / _ 1 Static White + DALI-2 (P2P)
 __ / _ Y Static White + ProtoPixel* (P2P)
 __ / _ Z Static White + Casambi (P2P)
 __ / 8Y Tunable White + ProtoPixel* (P2P)
 __ / 8Z Tunable White + Casambi (P2P)
 __ / 9Y Tunable Red + ProtoPixel* (P2P)
 __ / 9Z Tunable Red + Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.
 Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 7,2 W 400 mA
Tunable White:
 1 x LED 5,5 W 150 mA
Tunable Red:
 1 x LED PLATE 7 W 460 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
 Vol 0,0017 m³
 Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
 Extra cable length.



O142 Wide

- Finishes**
 ● **11/** __ Black
 (NCS S 8500-N)
 ● **24/** __ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
 /1 _ 2700 K - 680 lm
 /2 _ 3000 K - 711 lm
 /3 _ 3500 K - 737 lm
Tunable White
 /8 _ (1800 K - 4000 K)
 308 lm - 504 lm
 F →
 CRI >90

Control
O142 __ / __
 __ / _ 1 Static White + DALI-2 (P2P)
 __ / _ Y Static White + ProtoPixel* (P2P)
 __ / _ Z Static White + Casambi (P2P)
 __ / 8Y Tunable White + ProtoPixel* (P2P)
 __ / 8Z Tunable White + Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.
 Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics


2700 K - 3000 K - 3500K:
 1 x LED 7,2 W 400 mA
Tunable White:
 1 x LED 5,5 W 150 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
 Vol 0,0017 m³
 Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
 Extra cable length.

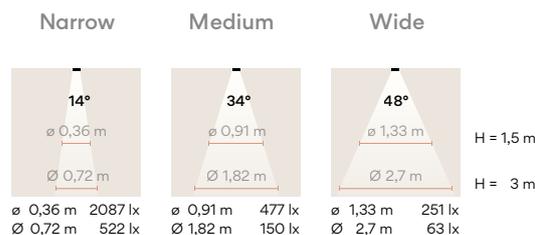

0130
Narrow
0131
Medium
0132
Wide

0130 Narrow

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 680 lm
- /2** _ 3000 K - 711 lm
- /3** _ 3500 K - 737 lm

F 
CRI >90

Control

0130 _ _ / _ _

- _ _ / _ **1** Static White + DALI-2 (P2P)
- _ _ / _ **Y** Static White + ProtoPixel* (P2P)
- _ _ / _ **Z** Static White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics


1 x LED 7,2 W 400 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



O131 Medium

- Finishes
- 11/ _ _ Black (NCS S 8500-N)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
 /1 _ 2700 K - 680 lm
 /2 _ 3000 K - 711 lm
 /3 _ 3500 K - 737 lm

Tunable White
 /8 _ (1800 K - 4000 K)
 308 lm - 504 lm

F

Tunable Red
 /9 _ (Red - 2700 K)
 147 lm - 535 lm

G

CRI >90

Control

O131 _ _ / _ _

- _ _ / _ 1 Static White + DALI-2 (P2P)
- _ _ / _ Y Static White + ProtoPixel* (P2P)
- _ _ / _ Z Static White + Casambi (P2P)
- _ _ / 8Y Tunable White + ProtoPixel* (P2P)
- _ _ / 8Z Tunable White + Casambi (P2P)
- _ _ / 9Y Tunable Red + ProtoPixel* (P2P)
- _ _ / 9Z Tunable Red + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
 Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 7,2 W 400 mA

Tunable White:
 1 x LED 5,5 W 150 mA

Tunable Red:
 1 x LED PLATE 7W 460mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
 Vol 0,0017 m³
 Gross weight 0,44 Kg Net weight 0,14 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



O132 Wide

- Finishes
- 11/ _ _ Black (NCS S 8500-N)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
 /1 _ 2700 K - 680 lm
 /2 _ 3000 K - 711 lm
 /3 _ 3500 K - 737 lm

Tunable White
 /8 _ (1800 K - 4000 K)
 308 lm - 504 lm

F

CRI >90

Control

O132 _ _ / _ _

- _ _ / _ 1 Static White + DALI-2 (P2P)
- _ _ / _ Y Static White + ProtoPixel* (P2P)
- _ _ / _ Z Static White + Casambi (P2P)
- _ _ / 8Y Tunable White + ProtoPixel* (P2P)
- _ _ / 8Z Tunable White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
 Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 7,2 W 400 mA


Tunable White:
 1 x LED 5,5 W 150 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
 Vol 0,0017 m³
 Gross weight 0,44 Kg Net weight 0,14 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

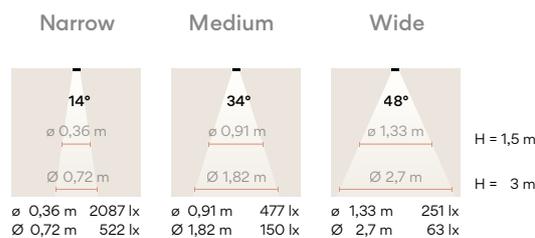

0135


Narrow

0136

Medium

0137

Wide

**0135 Narrow**

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 680 lm
- /2** _ 3000 K - 711 lm
- /3** _ 3500 K - 737 lm

F

CRI >90

Control

0135 __ / __

- __ / _ **1** Static White + DALI-2 (P2P)
- __ / _ **Y** Static White + ProtoPixel* (P2P)
- __ / _ **Z** Static White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m

Vol 0,0017 m³

Gross weight 0,44 Kg Net weight 0,14 Kg

LED IP20 CE UK ENE

0136 Medium

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1** _ 2700 K - 680 lm
- /2** _ 3000 K - 711 lm
- /3** _ 3500 K - 737 lm

Tunable White

- /8** _ (1800 K - 4000 K)
308 lm - 504 lm

F

Tunable Red

- /9** _ (Red - 2700 K)
147 lm - 535 lm

G

CRI >90

Control

0136 __ / __

- __ / _ **1** Static White + DALI-2 (P2P)
- __ / _ **Y** Static White + ProtoPixel* (P2P)
- __ / _ **Z** Static White + Casambi (P2P)
- __ / **8Y** Tunable White + ProtoPixel* (P2P)
- __ / **8Z** Tunable White + Casambi (P2P)
- __ / **9Y** Tunable Red + ProtoPixel* (P2P)
- __ / **9Z** Tunable Red + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 7,2 W 400 mA

Tunable White:

1 x LED 5,5 W 150 mA

Tunable Red:

1 x LED 7 W 460mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m

Vol 0,0017 m³

Gross weight 0,44 Kg Net weight 0,14 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20 CE UK ENE

O137 Wide

- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
 /1 2700 K - 680 lm
 /2 3000 K - 711 lm
 /3 3500 K - 737 lm

Tunable White
 /8 (1800 K - 4000 K)
 308 lm - 504 lm

☐

CRI >90

Control

O137 __ / __

- __ / 1 Static White + DALI-2 (P2P)
- __ / Y Static White + ProtoPixel* (P2P)
- __ / Z Static White + Casambi (P2P)
- __ / 8Y Tunable White + ProtoPixel* (P2P)
- __ / 8Z Tunable White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
 Track adapter: PC- Polycarbonate. Lens: PMMA.

Packaging

1 Box 0,15 x 0,15 x 0,075 m
 Vol 0,0017 m³
 Gross weight 0,44 Kg Net weight 0,14 Kg


Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 7,2 W 400 mA

Tunable White:
 1 x LED 5,5 W 150 mA

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

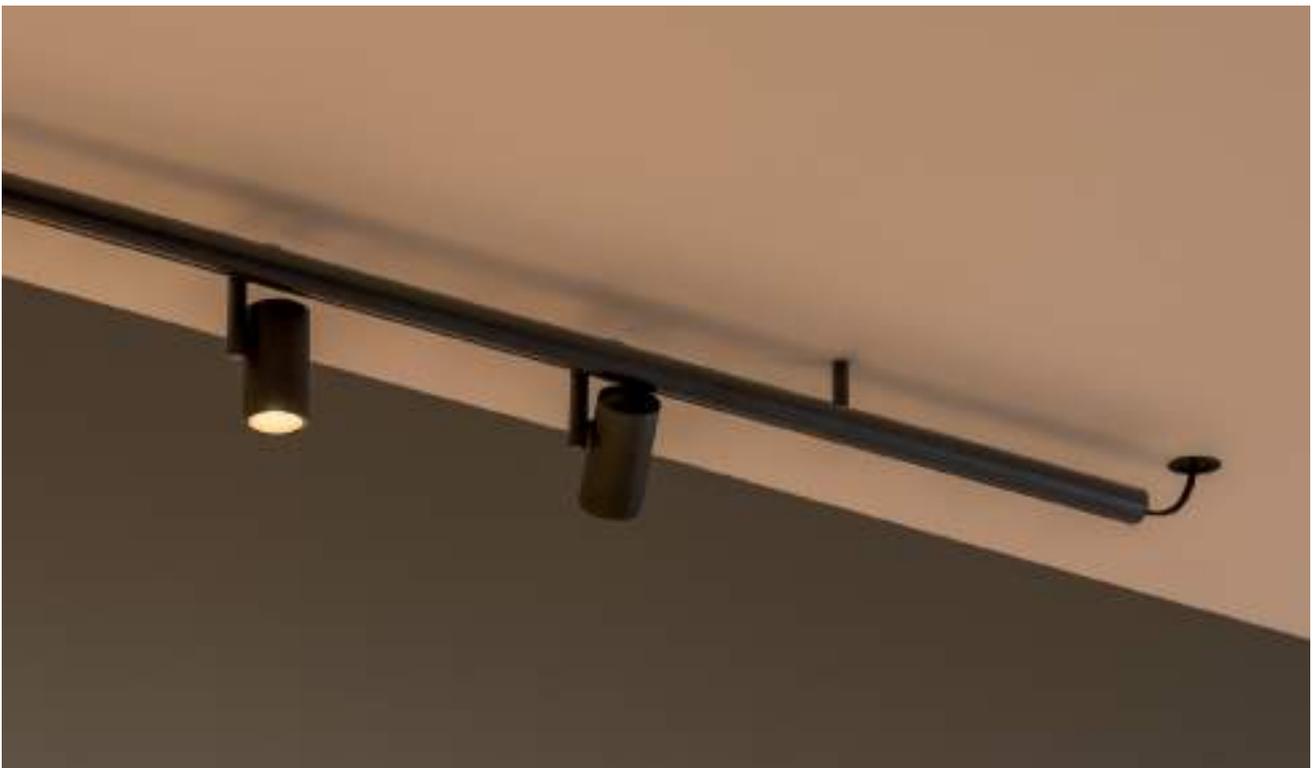

Pendant Ceiling - Accent Downlight

0151 Narrow
0152 Medium
0153 Wide



Ø 4 cm

0151
Narrow
0152
Medium
0153
Wide

0151 Narrow

Finishes

- 11/ __ Black
(NCS S 8500-N)
- 24/ __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 680 lm
 - /2 _ 3000 K - 711 lm
 - /3 _ 3500 K - 737 lm



CRI >90

Control

0151 __ / __

-
- __ / _ 1 Static White + DALI-2 (P2P)
 - __ / _ Y Static White + ProtoPixel* (P2P)
 - __ / _ Z Static White + Casambi (P2P)
-



Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,41 Kg Net weight 0,11 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



O152 Medium

Finishes ● 11/ __ Black (NCS S 8500-N) ● 24/ __ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature Static White /1 _ 2700 K - 680 lm /2 _ 3000 K - 711 lm /3 _ 3500 K - 737 lm Tunable White /8 _ (1800 K - 4000 K) 308 lm - 504 lm  Tunable Red /9 _ (Red - 2700 K) 147 lm - 535 lm  CRI >90	Control O152 __ / __ <hr/> __ / _ 1 Static White + DALI-2 (P2P) __ / _ Y Static White + ProtoPixel* (P2P) __ / _ Z Static White + Casambi (P2P) <hr/> __ / 8Y Tunable White + ProtoPixel* (P2P) __ / 8Z Tunable White + Casambi (P2P) <hr/> __ / 9Y Tunable Red + ProtoPixel* (P2P) __ / 9Z Tunable Red + Casambi (P2P)
---	--	---

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA
Tunable Red:
1 x LED PLATE 7 W 460mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,41 Kg Net weight 0,11 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



O153 Wide

Finishes ● 11/ __ Black (NCS S 8500-N) ● 24/ __ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature Static White /1 _ 2700 K - 680 lm /2 _ 3000 K - 711 lm /3 _ 3500 K - 737 lm Tunable White /8 _ (1800 K - 4000 K) 308 lm - 504 lm  CRI >90	Control O153 __ / __ <hr/> __ / _ 1 Static White + DALI-2 (P2P) __ / _ Y Static White + ProtoPixel* (P2P) __ / _ Z Static White + Casambi (P2P) <hr/> __ / 8Y Tunable White + ProtoPixel* (P2P) __ / 8Z Tunable White + Casambi (P2P)
---	---	---

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics



2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA

Packaging


1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,41 Kg Net weight 0,11 Kg

Notes


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

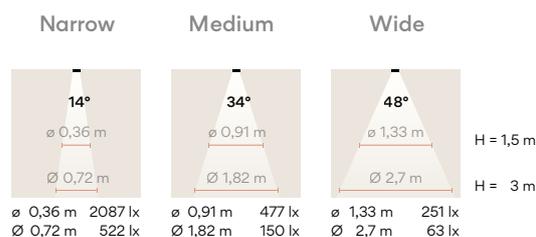

Pendant Ceiling - Light Reflector

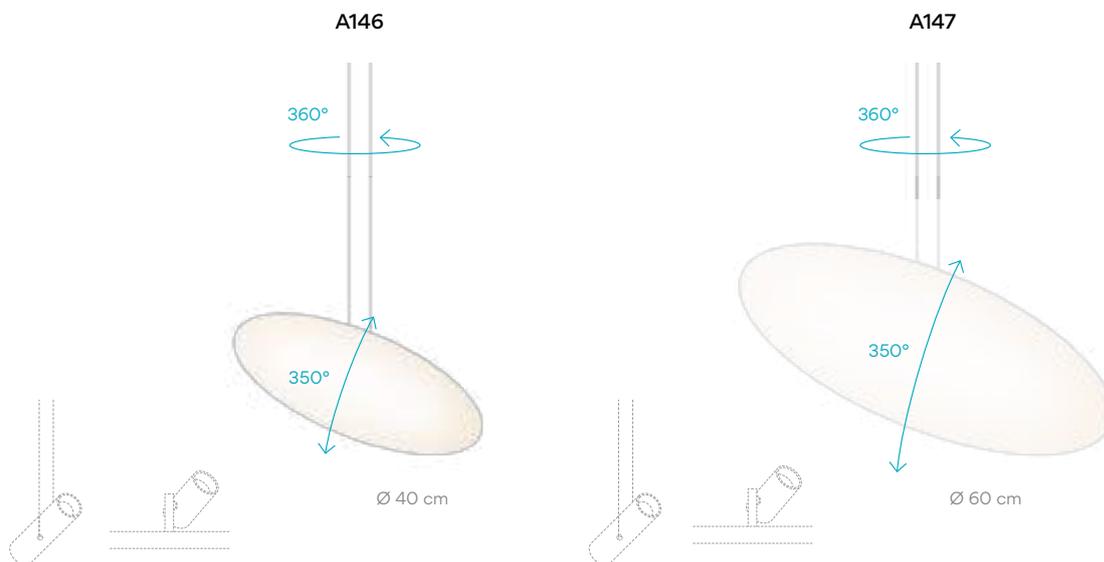

A146




Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

Materials
 Body: Aluminum.

Control
A146 11 / OM

Packaging
 1 Box 0,48 x 0,48 x 0,12 m
 Vol 0,00276 m³
 Gross weight 1,5 Kg
 Net weight 0,74 Kg

A147



Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)


Materials
 Body: Aluminum.

Control
A147 11 / OM

Packaging
 1 Box 0,68 x 0,68 x 0,12 m
 Vol 0,00555 m³
 Gross weight 2,5 Kg
 Net weight 1,56 Kg

MULTIPLE MODELS

Select your model at vibia.com and adjust

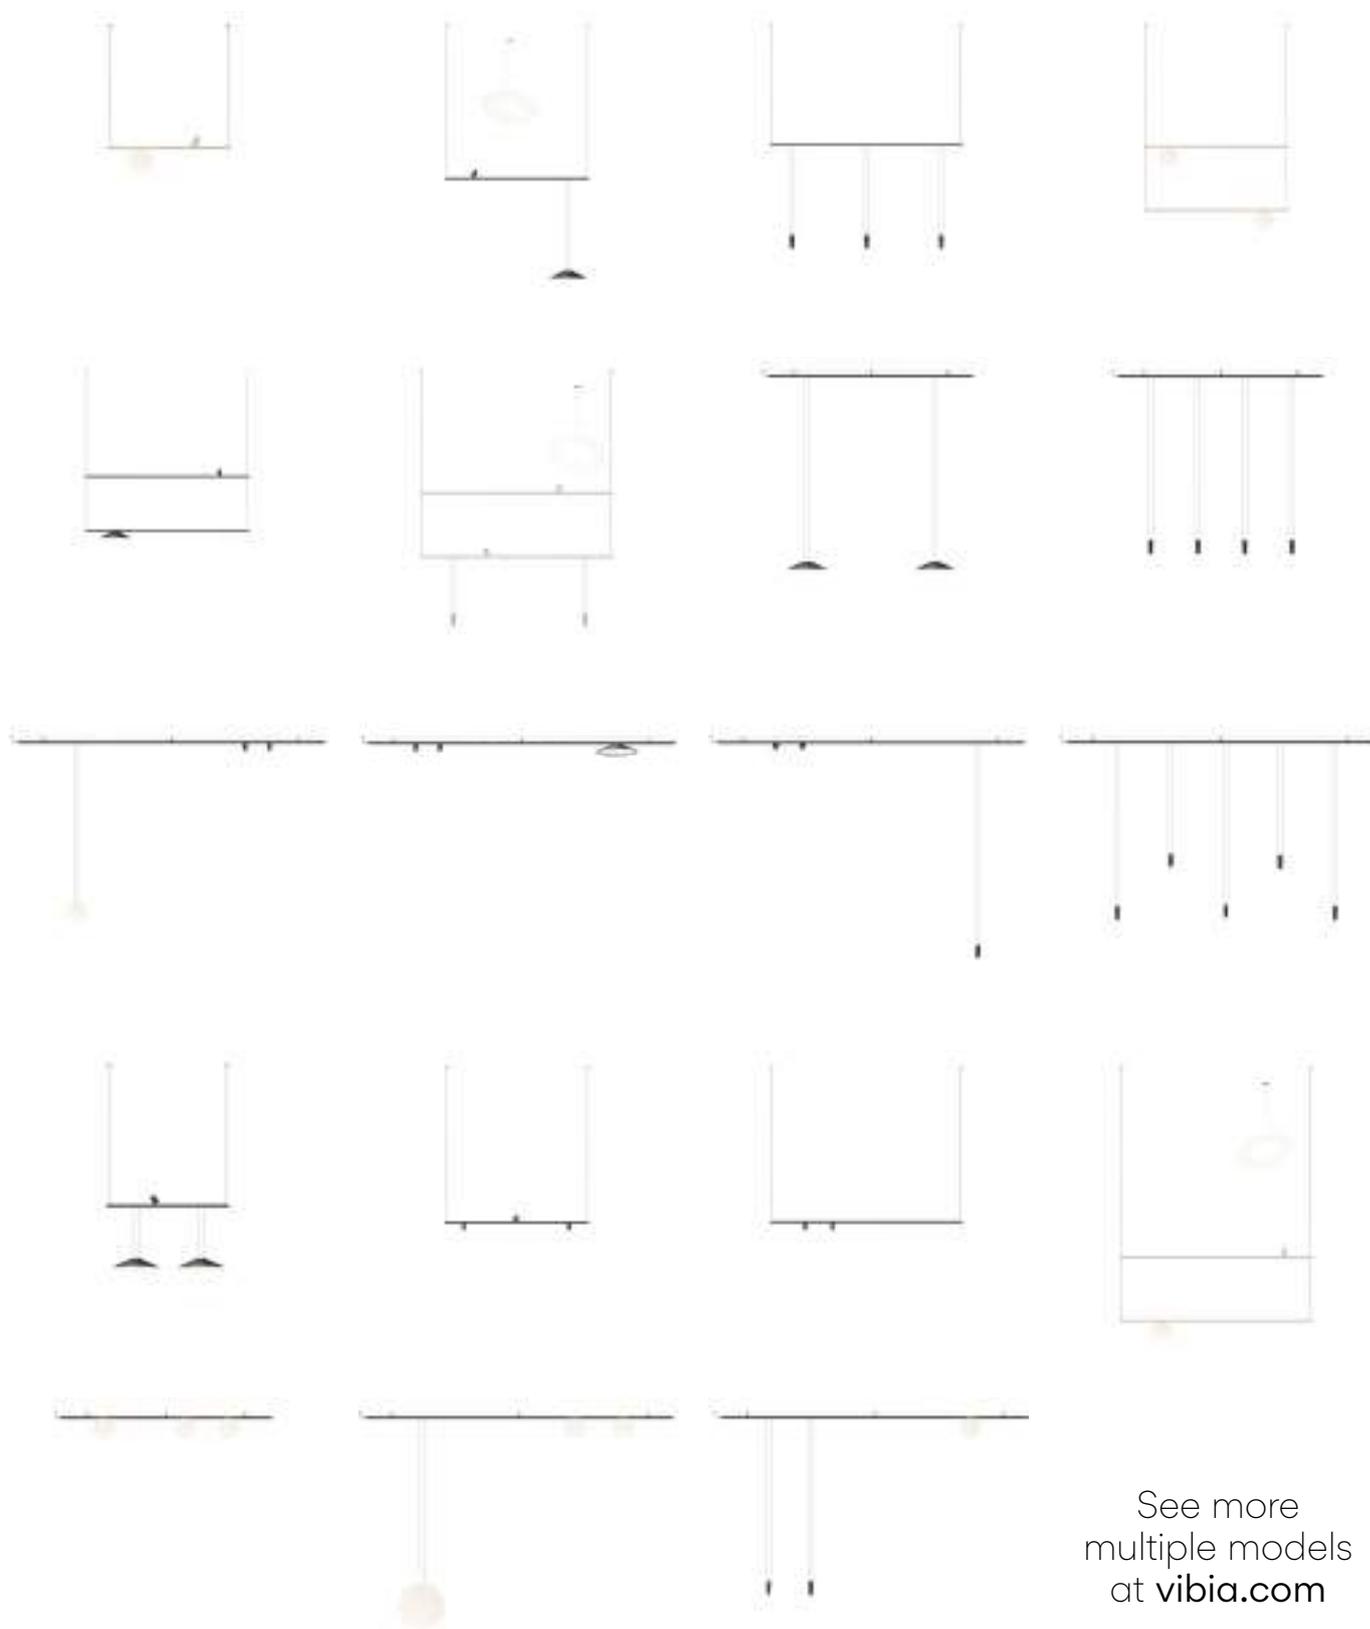

See more
multiple models
at vibia.com

Tracks

Ceiling Tracks

A352 210 cm

A355 300 cm



Ceiling Tracks 210 cm

Ceiling Tracks 300 cm

A352 __ / OM __

A355 __ / OM __

__ / OM _10

__ / OM _23

__ / OM _31

__ / OM _10

__ / OM _23

__ / OM _31

Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

Surface Materials

Track: Aluminum. Top cover: PVC.



Packaging A352

1 Box
0,125 x 0,125 x 2,25 m
Vol 0,0351 m³
Gross weight 3,87 Kg
Net weight 1,62 Kg

Packaging A355

1 Box
0,125 x 0,125 x 3,25 m
Vol 0,0508 m³
Gross weight 5,42 Kg
Net weight 2,17 Kg

Accessories included with the Ceiling tracks

Select Electrical connection



Built-in

Remote



Surface
Ø 6,5 cm
33 x 6 cm



Built-in XS
25 x 3 x 2 cm



Remote Micro
25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Pendant Single Tracks

A358 (H 3m)
A359 (H 9m)

110 cm



Height 3 m 110 cm

A358 __ / OM __

__ / OM _10

__ / OM _23

__ / OM _31

Height 9 m 110 cm

A359 __ / OM __

__ / OM _10

__ / OM _23

__ / OM _31

A364 (H 3m)
A365 (H 9m)

150 cm



Height 3 m 150 cm

A364 __ / OM __

__ / OM _10

__ / OM _23

__ / OM _31

Height 9 m 150 cm

A365 __ / OM __

__ / OM _10

__ / OM _23

__ / OM _31

A370 (H 3m)
A371 (H 9m)

200 cm



Height 3 m 200 cm

A370 __ / OM __

__ / OM _10

__ / OM _23

__ / OM _31

Height 9 m 200 cm

A371 __ / OM __

__ / OM _10

__ / OM _23

__ / OM _31

Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Top cover: PVC.
Ceiling supports: PC- Polycarbonate.



Packaging A358 - A359

1 Box
0,125 x 0,125 x 1,25 m
Vol 0,0195 m³
Gross weight 2,34 kg
Net weight 1,09 kg

Packaging A364 - A365

1 Box
0,125 x 0,125 x 1,6 m
Vol 0,025 m³
Gross weight 2,94 Kg
Net weight 1,34 Kg

Packaging A370 - A371

1 Box
0,125 x 0,125 x 2,25 m
Vol 0,0351 m³
Gross weight 3,89 Kg
Net weight 1,64 Kg

Accessories included with the Ceiling tracks



Surface

Built-in

Remote

Select Electrical connection



Surface
Ø 6,5 cm
33 x 6 cm

Built-in XS
25 x 3 x 2 cm

Remote Micro
25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote Micro

Counterweight

Only for pendant track.
1 counterweight required for 3 or 4 spots
and 2 counterweights required for 5 spots.

A160 __ / OM

Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

Pendant Double Tracks

A376 (H 3m)
A377 (H 9m)

110 cm



A382 (H 3m)
A383 (H 9m)

150 cm



A388 (H 3m)
A389 (H 9m)

200 cm



Height 3 m 110 cm

A376 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Height 3 m 150 cm

A382 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Height 3 m 200 cm

A388 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Height 9 m 110 cm

A377 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Height 9 m 150 cm

A383 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Height 9 m 200 cm

A389 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Top cover: PVC.
Ceiling supports: PC- Polycarbonate.



Packaging A376 - A377

1 Box
0,125 x 0,125 x 1,25 m
Vol 0,0195 m³
Gross weight 3,34 Kg
Net weight 1,99 Kg

Packaging A382 - A383

1 Box
0,125 x 0,125 x 1,6 m
Vol 0,025 m³
Gross weight 4,09 Kg
Net weight 2,49 Kg

Packaging A388 - A389

1 Box
0,125 x 0,125 x 2,25 m
Vol 0,0351 m³
Gross weight 5,49 Kg
Net weight 3,09 Kg

Accessories included with the Ceiling tracks



Surface

Built-in

Remote

Select Electrical connection



Surface

Built-in XS

Remote Micro

Ø 6,5 cm
33 x 6 cm

25 x 3 x 2 cm

25 x 3 x 2 cm

__10 Surface
__23 Built-in XS
__31 Remote
Micro

Counterweight

Only for pendant track.
1 counterweight required for 3 or 4 spots
and 2 counterweights required for 5 spots.

A160 __ / OM

Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

Electrical connection options

Driver for pendant

Control

A394 __ / _____

__ / OG _10 30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface

80 / OG _23 30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS

80 / OG _31 30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro

__ / OZ _10 30W + Casambi Simultaneous line + Surface

80 / OZ _23 30W + Casambi Simultaneous line + Built-in XS

80 / OZ _31 30W + Casambi Simultaneous line + Remote Micro

A395 __ / _____

__ / OG _10 48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface

80 / OG _23 48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS

80 / OG _31 48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro

__ / OZ _10 48W + Casambi Simultaneous line + Surface

80 / OZ _23 48W + Casambi Simultaneous line + Built-in XS

80 / OZ _31 48W + Casambi Simultaneous line + Remote Micro

A396 __ / _____

__ / OG _10 84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface

80 / OG _23 84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS

80 / OG _31 84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro

__ / OZ _10 84W + Casambi Simultaneous line + Surface

80 / OZ _23 84W + Casambi Simultaneous line + Built-in XS

80 / OZ _31 84W + Casambi Simultaneous line + Remote Micro

Driver for ceiling

Control

A397 __ / _____

__ / OG _10 30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface

80 / OG _23 30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS

80 / OG _31 30W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro

__ / OZ _10 30W + Casambi Simultaneous line + Surface

80 / OZ _23 30W + Casambi Simultaneous line + Built-in XS

80 / OZ _31 30W + Casambi Simultaneous line + Remote Micro

A398 __ / _____

__ / OG _10 48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface

80 / OG _23 48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS

80 / OG _31 48W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro

__ / OZ _10 48W + Casambi Simultaneous line + Surface

80 / OZ _23 48W + Casambi Simultaneous line + Built-in XS

80 / OZ _31 48W + Casambi Simultaneous line + Remote Micro

A399 __ / _____

__ / OG _10 84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Surface

80 / OG _23 84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Built-in XS

80 / OG _31 84W + DALI-2 (P2P), Casambi (P2P), ProtoPixel* (P2P) + Remote Micro

__ / OZ _10 84W + Casambi Simultaneous line + Surface

80 / OZ _23 84W + Casambi Simultaneous line + Built-in XS

80 / OZ _31 84W + Casambi Simultaneous line + Remote Micro

Finishes

- 11/ O _ Black (NCS S 8500-N)
- 24/ O _ Beige M1 (NCS S 2005-Y50R)
- 80/ O _ Without finish for Built-in and Remote.

Materiales

Aluminum + PC-Polycarbonate.
(Surface version only)



Electrical connection

Driver Constant Voltage 48V
220~240V 50/60Hz
Casambi Simultaneous line **Bi-volt**

Packaging

1 Box 0,12 x 0,10 x 0,37 m
Vol 0,0044 m³
Gross weight 0,95 Kg Net weight 0,53 Kg

Included tracks electrical connections



Pendant

Ceiling
Pendant

Built-in

Remote
9 m electrical cable included

Select Electrical connection



Ceiling

Surface

Ø 6,5 cm
33 x 6 cm

Pendant

Surface

Ø 6,5 cm
33 x 6 cm

Ceiling

Pendant

Built-in XS
25 x 3 x 2 cm

Ceiling

Remote Micro

25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Circus Solo

Design by Antoni Arola

The Circus system incorporates a range of independent elements that can be surface mounted to the ceiling, including spots, downlights and general lighting fixtures. This line allows professionals to create harmonic compositions and subtle atmospheres that break with the standards.

Pendant - Volumetric Diffuser

SURFACE BUILT-IN

0185



Ø 20 cm


0187



Ø 45 cm

SURFACE BUILT-IN REMOTE

0193

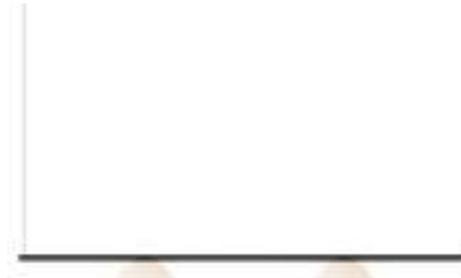

Ø 20 cm

150 cm

0185

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1_ 2700 K - 759 lm
- /2_ 3000 K - 794 lm
- /3_ 3500 K - 822 lm

Tunable White

- /8_ (1800 K - 4000 K)
- 452 lm - 709 lm

Tunable Red

- /9_ (Red - 2700 K)
- 172 lm - 468 lm

CRI >90

Control


0185 _ _ / _ _

_ _ / _ D Static White +
Push, DALI-2

_ _ / _ Z Static White +
Casambi

_ _ / 8Z Tunable White +
Casambi

_ _ / 9Z Tunable Red +
Casambi



Select Electrical connection



Surface

Built-in XS

_10 Surface
_23 Built-in XS

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 6,7 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:

1 x LED 6,7 W 385 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:

1 x LED PLATE 7,7 W 400 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,32 x 0,32 x 0,5 m
Vol 0,0512 m³
Gross weight 1,96 Kg Net weight 1,03 Kg

Notes

0185 _ _ / _ 8Z: Tunable White + Casambi **Multi-volt**

0185 _ _ / _ 9Z: Tunable Red + Casambi **Multi-volt**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.

Surface

LED IP20 CE UK ENE


Built-in

LED IP20 CE UK ENE

1160 | 10 | /1A | 18 |
Model | Finish | LED Colour Temperature | Control |
Electrical connection
Only for Pendant



0187

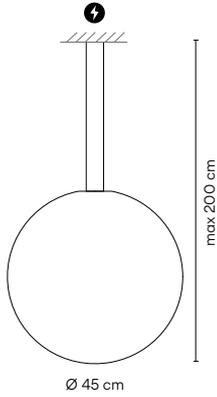

- Finishes**
- 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1_ 2700 K - 2588 lm
- /2_ 3000 K - 2706 lm
- /3_ 3500 K - 2804 lm

Tunable White

- /8_ (1800 K - 4000 K) 1403 lm - 2615 lm

Tunable Red

- /9_ (Red - 2700 K) 339 lm - 1582 lm

CRI >90

Control

0187 __ / __


__ / __ D Static White + Push, DALI-2

__ / __ Z Static White + Casambi

__ / 8Z Tunable White + Casambi

__ / 9Z Tunable Red + Casambi

⚡ Select Electrical connection



__10 Surface
__23 Built-in XS

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Packaging

1 Box 0,55 x 0,55 x 0,65 m
Vol 0,1966 m³
Gross weight 5,1 Kg Net weight 2,85 Kg

Light Source and electronics

2700 K - 3000 K- 3500K:

- 1 x LED 19,6 W 600 mA
- Constant Current 600 mA
- 220~240V 50/60Hz

Tunable White:

- 1 x LED 17,7 W 525 mA
- Constant Voltage 48V
- 220~240V 50/60Hz

Tunable Red:

- 1 x LED PLATE 15,7 W 500 mA
- Constant Voltage 48V
- 220~240V 50/60Hz

Notes

0187 __ / __ 8Z: Tunable White + Casambi **Multi-volt**

0187 __ / __ 9Z: Tunable Red + Casambi **Multi-volt**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.


Surface

LED IP20 CE UK ENEC

Built-in

LED IP20 CE UK ENEC

0193



- Finishes**
- 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /1_ 2700 K - 1518 lm
- /2_ 3000 K - 1588 lm
- /3_ 3500 K - 1644 lm

CRI >90


Control

0193 __ / __

__ / __ D Static White + Push, DALI-2

__ / __ Z Static White + Casambi

⚡ Select Electrical connection



__10 Surface
__23 Built-in XS
__31 Remote Micro

Materials

Sphere: PE- Polyethylene.
Top cover: Aluminum. Structure: Aluminum.
Canopy (Surface): Aluminum + Polycarbonate.
Canopy (Built-in): ABS + PC- Polycarbonate.

Packaging

1 Box 1,82 x 0,30 x 0,30 m
Vol 0,164 m³
Gross weight 3,5 Kg Net weight 2,22 Kg

Light Source and electronics

- 2 x LED 6,7 W 400 mA
- Constant Current 400 mA
- 220~240V 50/60Hz

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.

LED IP20 CE UK ENEC

Pendant - Hidden Diffuser (Screened)

SURFACE BUILT-IN

0182



Ø 40 cm

SURFACE BUILT-IN REMOTE


0196



Ø 40 cm

150 cm

0182

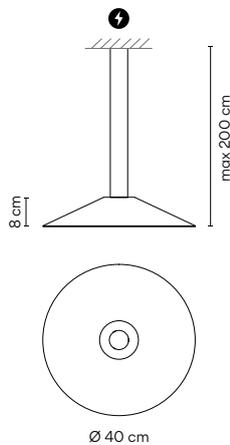

Finishes

- 11/ _ Black (NCS S 8500-N)
- 24/ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 1763 lm

/2 _ 3000 K - 1843 lm

/3 _ 3500 K - 1910 lm

Tunable White

/8 _ (1800 K - 4000 K)

1340 lm - 2501 lm

Tunable Red

/9 _ (Red - 2700 K)

339,6 lm - 1582 lm

Control

/E >

/D >

/F >

CRI >90

Control

0182 _ _ / _ _

_ _ / _ D Static White + Push, DALI-2

_ _ / _ Z Static White + Casambi

_ _ / 8Z Tunable White + Casambi

_ _ / 9Z Tunable Red + Casambi

Select Electrical connection



Surface

Built-in XS

_10 Surface
_23 Built-in XS

Materials

Shade: Aluminum. Top cover: Aluminum.
Diffuser: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 12,8 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:

1 x LED 16,8 W 500 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:

1 x LED PLATE 15,7 W 500 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,480 x 0,480 x 0,115 m
Vol 0,0265 m³
Gross weight 3 Kg Net weight 1,42 Kg

Notes

0182 _ _ / _ 8Z: Tunable White + Casambi **Multi-volt**

0182 _ _ / _ 9Z: Tunable Red + Casambi **Multi-volt**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.

Surface

LED IP20 CE UK ENE

Built-in XS

LED IP20 CE UK ENE

0196


- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

- LED Colour Temperature**
- /1 _ 2700 K - 3104 lm
 - /2 _ 3000 K - 3244 lm
 - /3 _ 3500 K - 3362 lm
- CRI >90

Control

0196 _ _ / _ _

- _ _ / _ **D** Static White +
Push, DALI-2
- _ _ / _ **Z** Static White +
Casambi



Select Electrical connection



Surface Built-in XS Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Shade: Aluminum. Top cover: Aluminum.
Diffuser: PC- Polycarbonate. Structure: Aluminum.
Canopy (Surface): Aluminum + Polycarbonate.
Canopy (Built-in): ABS + PC- Polycarbonate

Light Source and electronics

2 x LED 11,1 W 350 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 1,60 x 0,48 x 0,13 m
Vol 0,100 m³
Gross weight 5,60 Kg Net weight 3,10 Kg

Notes

DALI-2 products are compatible
(via a designated gateway) with all
ProtoPixel dynamic-light solution products.
Extra cable length.



Pendant - Accent Spotlight

SURFACE BUILT-IN



0176
Narrow
0177
Medium
0178
Wide

0176 Narrow

Finishes

- 11/ __ Black
(NCS S 8500-N)
- 24/ __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1_ 2700 K - 680 lm
- /2_ 3000 K - 711 lm
- /3_ 3500 K - 737 lm

F


CRI >90

Control

0176 __ / __

__ / _ D Static White +
Push, DALI-2

__ / _ Z Static White +
Casambi



Select Electrical connection



Surface

Built-in XS

_10 Surface
_23 Built-in XS

Materials

Body: Zinc Alloy.
Snoot and cover: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging

1 Box 0,30 x 0,15 x 0,075 m
Vol 0,0034 m³
Gross weight 1,39 Kg Net weight 1,09 Kg

Notes

DALI-2 products are compatible
(via a designated gateway) with all
ProtoPixel dynamic-light solution products.
Extra cable length.

Surface

LED IP20 CE UK ENE

Built-in XS

LED IP20 CE UK ENE

0177 Medium

- Finishes
- 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
 /1_ 2700 K - 680 lm
 /2_ 3000 K - 711 lm
 /3_ 3500 K - 737 lm

Tunable White
 /8_ (1800 K - 4000 K)
 308 lm - 504 lm

Tunable Red
 /9_ (Red - 2700 K)
 147 lm - 535 lm

F

CRI >90

Control

0177 __ / __


__ / __ D Static White + Push, DALI-2

__ / __ Z Static White + Casambi

__ / 8Z Tunable White + Casambi

__ / 9Z Tunable Red + Casambi

Select Electrical connection



Surface Built-in XS

_10 Surface
 _23 Built-in XS

Materials

Body: Zinc Alloy.
 Snoot and cover: PC- Polycarbonate.
 Canopy (Surface): Aluminum.
 Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 7,2 W 400 mA
 Constant Current 400 mA
 220-240V 50/60Hz

Tunable White:
 1 x LED 5,5 W 150 mA
 Constant Voltage 48V
 220-240V 50/60Hz

Tunable Red:
 1 x LED PLATE 7 W 460 mA
 Constant Voltage 48V
 220-240V 50/60Hz

Packaging

1 Box 0,30 x 0,15 x 0,075 m
 Vol 0,0034 m³
 Gross weight 1,39 Kg Net weight 1,09 Kg

Notes

0177 __ / __ 8Z: Tunable White + Casambi **Multi-volt**

0177 __ / __ 9Z: Tunable Red + Casambi **Multi-volt**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.

Surface



Built-in XS



0178 Wide

- Finishes
- 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
 /1_ 2700 K - 680 lm
 /2_ 3000 K - 711 lm
 /3_ 3500 K - 737 lm

Tunable White
 /8_ (1800 K - 4000 K)
 308 lm - 504 lm

F

CRI >90

Control

0178 __ / __

__ / __ D Static White + Push, DALI-2

__ / __ Z Static White + Casambi

__ / 8Z Tunable White + Casambi

Select Electrical connection



Surface Built-in XS

_10 Surface
 _23 Built-in XS

Materials

Body: Zinc Alloy.
 Snoot and cover: PC- Polycarbonate.
 Canopy (Surface): Aluminum.
 Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 7,2 W 400 mA
 Constant Current 400 mA
 220-240V 50/60Hz

Tunable White:
 1 x LED 5,5 W 150 mA
 Constant Voltage 48V
 220-240V 50/60Hz

Packaging

1 Box 0,30 x 0,15 x 0,075 m
 Vol 0,0034 m³
 Gross weight 1,39 Kg Net weight 1,09 Kg

Notes

0178 __ / _ 8Z: Tunable White + Casambi **Multi-volt**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.


Extra cable length.

Surface

LED IP20 CE ENEC ENEC

Built-in XS

LED IP20 CE ENEC ENEC

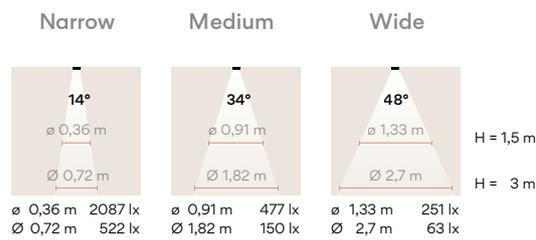

Ceiling - Accent Spotlight

SPOTS (REMOTE / BUILT-IN)

0171 Narrow
0172 Medium
0173 Wide



0171
Narrow
0172
Medium
0173
Wide

0171 Narrow

Finishes
● 11/ _ _ Black
(NCS S 8500-N)
● 24/ _ _ Beige M1
(NCS S 2005-Y50R)


LED Colour Temperature
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm
E →
CRI >90

Control

0171 _ _ / _ _

_ _ / _ O On/Off
_ _ / _ D Push, DALI-2
_ _ / _ M Without driver
_ _ / _ Z Casambi

BUILT-IN




Select Electrical connection



Built-in XS Remote
Micro

_23 Built-in XS
_31 Remote
Micro

REMOTE



Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Ceiling Base: Aluminum. Installation frame (Built-in): POM.
Installation frame (Remote): Aluminum.

Light Source and electronics

1 x LED 7,2 W 400 mA
Constant Current 400 mA
220-240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m³
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products. Visit vibia.com to group several pieces with just one electrical point.



0172 Medium

- Finishes**
- **11/ __ Black**
(NCS S 8500-N)
 - **24/ __ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 680 lm
 - /2 _ 3000 K - 711 lm
 - /3 _ 3500 K - 737 lm

- Tunable White**
- /8 _ (1800 K - 4000 K)
308 lm - 504 lm



- Tunable Red**
- /9 _ (Red - 2700 K)
147 lm - 535 lm



CRI >90

Control

0172 __ / __

__ / __ **O** Static White +
On/Off

__ / __ **D** Static White +
Push, DALI-2

__ / __ **M** Static White +
Without driver

__ / __ **Z** Static White +
Casambi

__ / **8Z** Tunable White +
Casambi

__ / **9Z** Tunable Red +
Casambi

Select Electrical connection



Built-in XS



Remote
Micro

_23 Built-in XS
_31 Remote
Micro

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Ceiling Base: Aluminum. Installation frame (Built-in): POM.
Installation frame (Remote): Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 7 W 460 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m³
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes

DALI-2 products are compatible
(via a designated gateway) with all
ProtoPixel dynamic-light solution products.
Visit vibia.com to group several pieces with
just one electrical point.



0173 Wide

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

0173 _ _ / _ _

_ _ / _ **O** Static White +
+ On/Off

_ _ / _ **D** Static White +
Push, DALI-2

_ _ / _ **M** Static White +
Without driver

_ _ / _ **Z** Static White +
Casambi

_ _ / **8Z** Tunable White +
Casambi

Select Electrical connection



Built-in XS Remote Micro

_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Ceiling Base: Aluminum. Installation frame (Built-in): POM.
Installation frame (Remote): Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz


Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging


1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m³
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.
Visit vibia.com to group several pieces with just one electrical point.

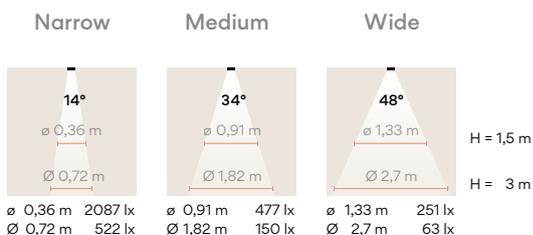

Light reflector- go to [page 22](#)

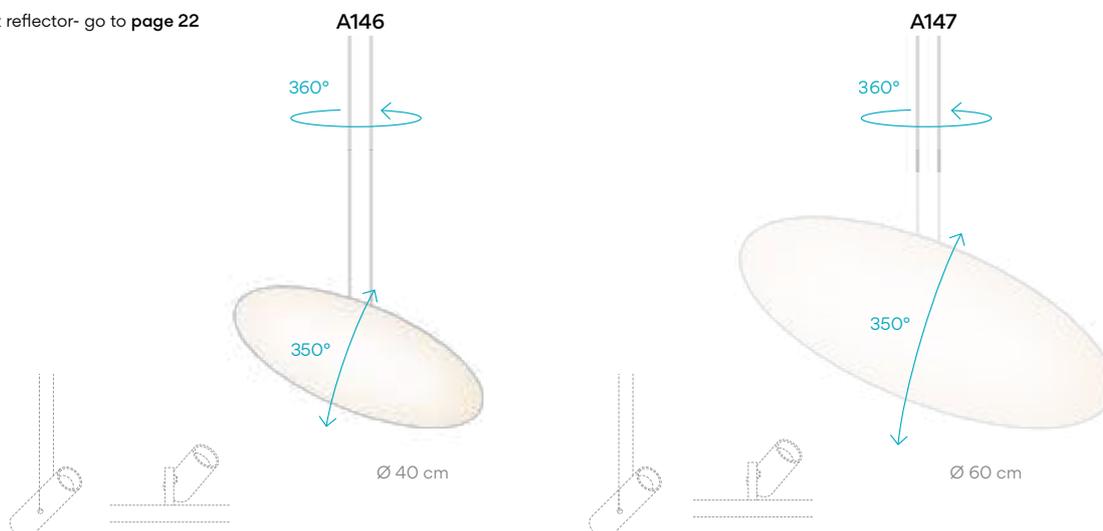

⚡ Select Electrical connection

For Ref. 0176, 0177, 0178, 0182, 0185, 0187

Drop ceiling

_23
Built-in XS



Ø 8 cm
height 8,5 cm
match with
fixture finish.

Regular ceiling

_10
Surface



Ø 6,5 cm
height 17 cm
match with
fixture finish.

For Ref. 0193, 0196

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm
for plaster
ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 8,5 cm
match with
fixture finish.

Regular ceiling

_10
Surface



Ø 6,5 cm
Length 33 cm
match with
fixture finish.

For Ref. 0171, 0172, 0173

Drop ceiling

_31
Remote Micro




Ø 3 cm
height 7 cm
for plaster
ceilings.
Black finish.

_23
Built-in XS




Ø 8,3 cm
height 8,5 cm
match with
fixture finish.

Remote



Built-in




Skán

Design by Lievore, Altherr, Molina

Skán is a sleek and unadorned fixture. It combines lean lines with soothing purity of form, adding a minimalist sensibility to any space.

1160	10	/1A
Model	Finish	Control
LED Colour Temperature		


Floor

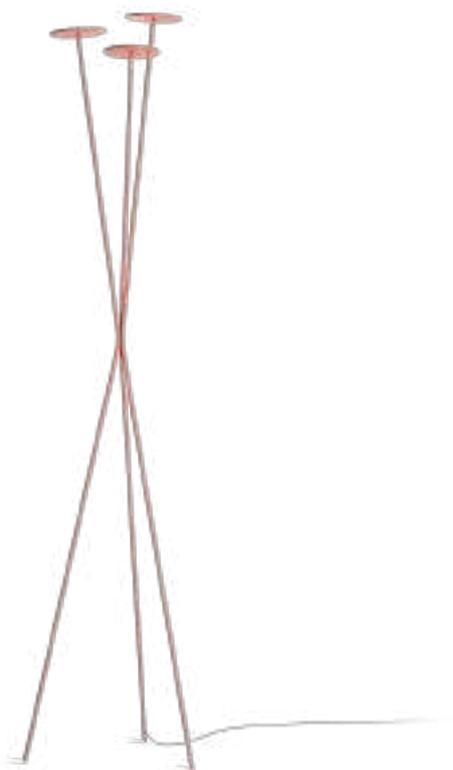

0260

43 x 37,5 x 198 cm

0260



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **37/** _ _ Terra Red (NCS S4040-Y70R)

Finish customization

(Available options: Vibia colour palette.)

Minimum quantity 10 units. Price + 10%

LED Colour Temperature

/1_ 2700 K - 4430,16 lm



/2_ 3000 K - 3792,73 lm



/3_ 3500 K - 4799,9 lm



CRI >90

Control

0260 _ _ / _ **5** Push

Materials

Head: Aluminum. Diffuser: PMMA.
Vertical tube: Steel.


Light Source and electronics

3 x LED 9,2 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 2,11 x 0,60 x 0,60 m
Vol 0,7596 m³
Gross weight 5,4 Kg Net weight 2,5 Kg



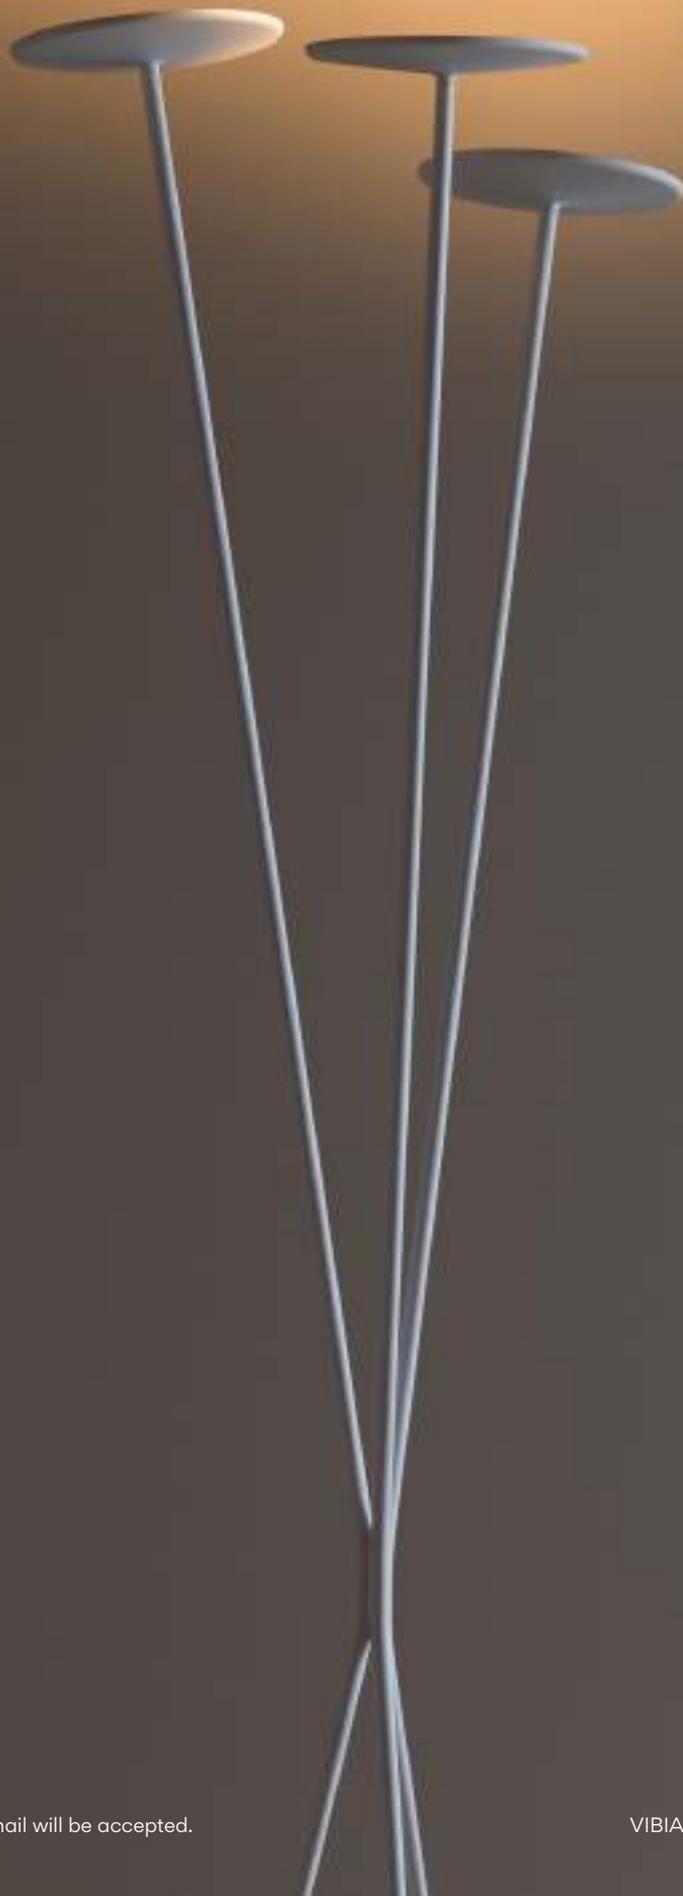

Pendant

INDIVIDUAL MODEL

0270





Ø 30 cm

0275




Ø 60 cm

MULTIPLE MODELS

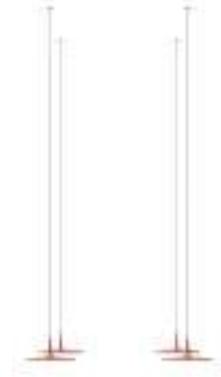

INDIVIDUAL MODEL

0270




- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 42/ __ Blue M1 (NCS S 5010-B10G)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1 _ 2700 K - 1269 lm CRI >90
 - /2 _ 3000 K - 1123 lm CRI >80
 - /3 _ 3500 K - 1374 lm CRI >90

Finish customization
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

- Control**
- 0270 __ / __
- __ / _ 1 DALI-2
 - __ / _ 2 0-10V
 - __ / _ B Push; 1-10V
 - __ / _ Z Casambi

Select Eletrical connection

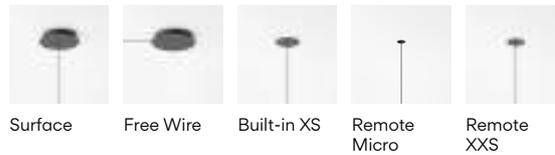

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Shade: Aluminum. Diffuser: PMMA.
 Canopy: Steel.

Light Source and electronics

1 x LED 9,3 W 350 mA
 Constant Current 350 mA
 110-277V 50/60Hz

Packaging


1 Box 0,29 x 0,38 x 0,38 m
 Vol 0,0418 m³
 Gross weight 2,6 Kg Net weight 1,4 Kg

Notes

0270 __ / _ 1: DALI-2 **Bi-volt**
 0270 __ / _ B: Push; 1-10V **Bi-volt**
 Extra cable length.



0275



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 42/ __ Blue M1 (NCS S 5010-B10G)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1 _ 2700 K - 1269 lm CRI >90
 - /2 _ 3000 K - 1575 lm CRI >80
 - /3 _ 3500 K - 1375 lm CRI >90

Finish customization
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

- Control**
- 0275 __ / __
- __ / _ 1 DALI-2
 - __ / _ B Push; 1-10V
 - __ / _ Z Casambi

Select Eletrical connection



- _10 Surface
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Body: Aluminum. Diffuser: PMMA.
 Canopy Plate: Steel.

Light Source and electronics

1 x LED 13,9 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging

1 Box 0,42 x 0,71 x 0,66 m
 Vol 0,2000 m³
 Gross weight 7 Kg Net weight 4,4 Kg


Notes

Extra cable length.



MULTIPLE MODELS

Select your model at vibia.com and adjust



See more
multiple models
at vibia.com

Finishes

- **10/** __ White
(NCS S 0300-N)
- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)
- **37/** __ Terra Red
(NCS S4040-Y70R)
- **42/** __ Blue M1
(NCS S 5010-B10G)
- **47/** __ Green L1
(NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1** _ 2700 K
CRI >90
- /2** _ 3000 K
CRI >80
- /3** _ 3500 K
CRI >90

Control

Model __ / __

__ / __ 1 DALI-2

__ / __ 2 0-10V

__ / __ B Push; 1-10V

__ / __ Z Casambi

⚡ Select Electrical connection


For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0270

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

Regular ceiling
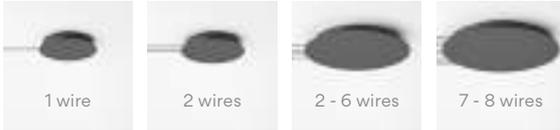
<p>_10 Surface</p>  <p>Ø 17,3 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire 2 wires 2 - 6 wires 7 - 8 wires</p> <p>Ø 20 cm Ø 22 cm Ø 36 cm Ø 40 cm</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>			
--	--	--	--	--

For Ref. 0275


Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

Regular ceiling

<p>_10 Surface</p>  <p>Ø 20 cm</p> <p>match with fixture finish.</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>

Remote



Built-in



Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.


Notes

Additional cable length
from 2 m.



MULTIPLE MODELS

0280



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 42/ __ Blue M1 (NCS S 5010-B10G)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
- Finish customization**
 (Available options:
 Vibia colour palette
 Minimum quantity
 10 units. Price + 10%)

- LED Colour Temperature**
- /1 _ 2700 K - 3123 lm
CRI >90
 - /2 _ 3000 K - 3369 lm
CRI >80
 - /3 _ 3500 K - 4124,7 lm
CRI >90
- E

- Control**
- 0280 __ / __
-
- __ / _ 1 DALI-2
- __ / _ B Push; 1-10V
-
- __ / _ Z Casambi

Materials
 Body: Aluminum. Diffuser: PMMA.
 Canopy Plate: Steel.


Light Source and electronics
 3 x LED 9,3 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,2226 m³
 Gross weight 13,7 Kg Net weight 9,2 Kg

Notes
 Surface.
 Extra cable length.
UNTIL STOCK RUNS OUT



0282



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 42/ __ Blue M1 (NCS S 5010-B10G)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
- Finish customization**
 (Available options:
 Vibia colour palette
 Minimum quantity
 10 units. Price + 10%)

- LED Colour Temperature**
- /1 _ 2700 K - 5205 lm
CRI >90
 - /2 _ 3000 K - 5615 lm
CRI >80
 - /3 _ 3500 K - 6874,5 lm
CRI >90
- E

- Control**
- 0282 __ / __
-
- __ / _ 1 DALI-2
- __ / _ B Push; 1-10V
-
- __ / _ Z Casambi

Materials
 Body: Aluminum. Diffuser: PMMA.
 Canopy Plate: Steel.

Light Source and electronics
 5 x LED 9,3 W 350mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,3290 m³
 Gross weight 36,9 Kg Net weight 29 Kg

Notes
 Surface.
 Extra cable length.
UNTIL STOCK RUNS OUT





Wireflow

Design by Arik Levy

Crafted of black, electrical cables, Volumetric's airy, three-dimensional outline lends it the feeling of being at once present and absent. The geometric volumes are tipped with LED light terminals in a contemporary take on the traditional chandelier.

Pendant

4 LEDs



0309
100 x 100 cm



0310
80 x 80 cm



0311
64 x 64 cm




0312
50 x 50 cm


8 LEDs



0299
150 x 150 cm

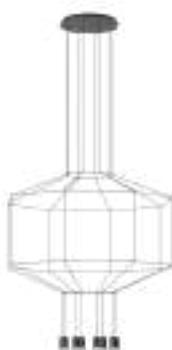

0300
120 x 120 cm

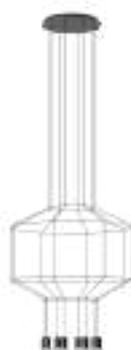

0301
89 x 89 cm




0302
70 x 70 cm



0303
55 x 55 cm


Personalise your own Wireflow composition quick and easy at vibia.com

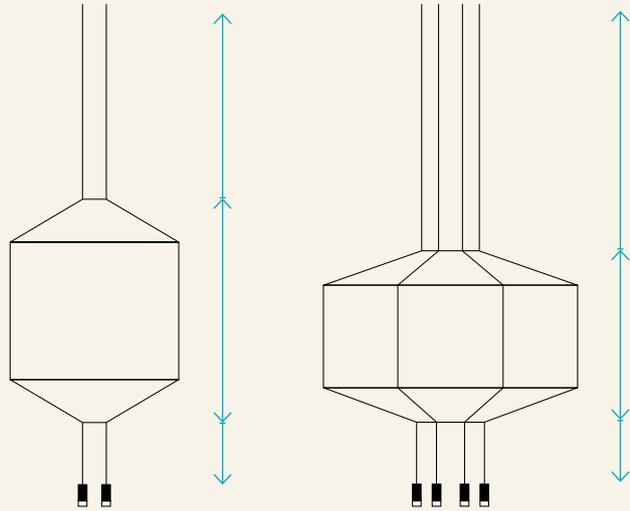

Pressed-glass diffuser.



0299



Finishes
 ● 04/ __ Black
 (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 3880 lm
 [D]
 /2 _ 3000 K - 3880 lm
 /3 _ 3500 K - 4002,4 lm
 [E]
 CRI >90

Control

0299 __ / __

__ / _ A Push; 1-10V; DALI-2
 __ / _ Z Casambi

Materials

Diffuser: Pressed-glass.
 Horizontal rods and Canopy: Steel.
 Body: Aluminum.

Light Source and electronics

8 x LED 4,5 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,3245 m³
 Gross weight 20,6 Kg Net weight 9,6 Kg

Notes

0299 __ / _ A: Push; 1-10V; DALI-2 [Bi-volt]


Pressed-glass diffuser.

Configuration layout at vibia.com

Min. quantity, upcharge and extra lead time apply.

[LED] [IP20] [CE] [EAC] [EBC]

0300



Finishes
 ● 04/ __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 3880 lm
 /2 _ 3000 K - 3880 lm
 /3 _ 3500 K - 4002,4 lm
 E
 CRI >90

Control
 0300 __ / __
 __ / _ A Push; 1-10V; DALI-2
 __ / _ Z Casambi

Materials
 Diffuser: Pressed-glass.
 Horizontal rods and Canopy: Steel.
 Body: Aluminum.


Light Source and electronics
 8 x LED 4,5 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,3246 m³
 Gross weight 19,95 Kg Net weight 8,95 Kg

Notes
 0300 __ / _ A: Push; 1-10V; DALI-2 Bi-volt
 Pressed-glass diffuser.
Configuration layout at vibia.com
 Min. quantity, upcharge and extra lead time apply.

LED IP20 CE UK ENEC

0301



Finishes
 ● 04/ __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 3880 lm
 /2 _ 3000 K - 3880 lm
 /3 _ 3500 K - 4002,4 lm
 E
 CRI >90

Control
 0301 __ / __
 __ / _ A Push; 1-10V; DALI-2
 __ / _ Z Casambi

Materials
 Diffuser: Pressed-glass.
 Horizontal rods and Canopy: Steel.
 Body: Aluminum.


Light Source and electronics
 8 x LED 4,5 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,2100 m³
 Gross weight 17,75 Kg Net weight 8,75 Kg

Notes
 0301 __ / _ A: Push; 1-10V; DALI-2 Bi-volt
 Pressed-glass diffuser.
Configuration layout at vibia.com
 Min. quantity, upcharge and extra lead time apply.

LED IP20 CE UK ENEC

0302



Finishes
 ● 04/ __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 3880 lm
 /2 _ 3000 K - 3880 lm
 /3 _ 3500 K - 4002,4 lm
 E
 CRI >90

Control
 0302 __ / __
 __ / _ A Push; 1-10V; DALI-2
 __ / _ Z Casambi

Materials
 Diffuser: Pressed-glass.
 Horizontal rods and Canopy: Steel.
 Body: Aluminum.


Light Source and electronics
 8 x LED 4,5 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,1558 m³
 Gross weight 14,6 Kg Net weight 8,6 Kg

Notes
 0302 __ / _ A: Push; 1-10V; DALI-2 Bi-volt
 Pressed-glass diffuser.
Configuration layout at vibia.com
 Min. quantity, upcharge and extra lead time apply.

LED IP20 CE UK ENEC

0303



Finishes
04/ __ Black
 (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 3880 lm
 D
 /2 _ 3000 K - 3880 lm
 /3 _ 3500 K - 4002,4 lm
 E
 CRI >90

Control
0303 __ / __

__ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials
 Diffuser: Pressed-glass.
 Horizontal rods and Canopy: Steel.
 Body: Aluminum.

Light Source and electronics
 8 x LED 4,5 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz


Packaging
 2 Boxes
 Total Vol 0,1558 m³
 Gross weight 13 Kg Net weight 8,5 Kg

Notes
 0303 __ / __ A: Push; 1-10V; DALI-2 **Bi-volt**
 Pressed-glass diffuser.

Configuration layout at vibia.com
 Min. quantity, upcharge and extra lead time apply.



0309



Finishes
04/ __ Black
 (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 1940 lm
 D
 /2 _ 3000 K - 1940 lm
 /3 _ 3500 K - 2001,2 lm
 E
 CRI >90

Control
0309 __ / __

__ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials
 Diffuser: Pressed-glass.
 Horizontal rods and Canopy: Steel.
 Body: Aluminum.

Light Source and electronics
 4 x LED 4,5 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz


Packaging
 2 Boxes
 Total Vol 0,2100 m³
 Gross weight 12,3 Kg Net weight 5,3 Kg

Notes
 0309 __ / __ A: Push; 1-10V; DALI-2 **Bi-volt**
 Pressed-glass diffuser.

Configuration layout at vibia.com
 Min. quantity, upcharge and extra lead time apply.



0310



Finishes
04/ __ Black
 (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 1940 lm
 D
 /2 _ 3000 K - 1940 lm
 /3 _ 3500 K - 2001,2 lm
 E
 CRI >90

Control
0310 __ / __

__ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials
 Diffuser: Pressed-glass.
 Horizontal rods and Canopy: Steel.
 Body: Aluminum.


Light Source and electronics
 4 x LED 4,5 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,2100 m³
 Gross weight 11,8 Kg Net weight 4,8 Kg


Notes
 0310 __ / __ A: Push; 1-10V; DALI-2 **Bi-volt**
 Pressed-glass diffuser.

Configuration layout at vibia.com
 Min. quantity, upcharge and extra lead time apply.



0311 	Finishes ● 04/ __ Black (RAL 9005)	LED Colour Temperature /1 _ 2700 K - 1940 lm <input type="checkbox"/> D /2 _ 3000 K - 1940 lm /3 _ 3500 K - 2001,2 lm <input type="checkbox"/> E CRI >90	Control 0311 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum.	Packaging 2 Boxes Total Vol 0,1558 m ³ Gross weight 8,7 Kg Net weight 4,7 Kg	Notes 0311 __ / __ A: Push; 1-10V; DALI-2 <input type="checkbox"/> Bi-volt Pressed-glass diffuser.

LED  IP20 CE UK ENEC E

0312 	Finishes ● 04/ __ Black (RAL 9005)	LED Colour Temperature /1 _ 2700 K - 1940 lm <input type="checkbox"/> D /2 _ 3000 K - 1940 lm /3 _ 3500 K - 2001,2 lm <input type="checkbox"/> E CRI >90	Control 0312 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum.	Packaging 2 Boxes Total Vol 0,1558 m ³ Gross weight 8,6 Kg Net weight 4,6 Kg	Notes 0312 __ / __ A: Push; 1-10V; DALI-2 <input type="checkbox"/> Bi-volt Pressed-glass diffuser.

LED  IP20 CE UK ENEC E



Wireflow Lineal

Design by Arik Levy

Wireflow Lineal's ultra-minimalist design is balanced by a distinctive, precipitous presence that adds an intriguing accent to any room. Ideal for illuminating large spaces with high ceilings, its lean profile traces a formal silhouette in an open space with meticulous precision.

Pendant

2 LEDs

0320


57 cm x max. 200 cm



6 LEDs

0338


145 cm x max. 200 cm

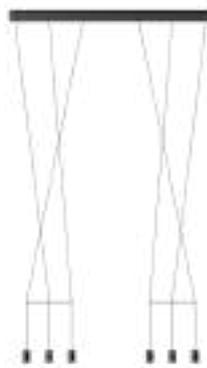

10 LEDs

0330


275 cm x max. 200 cm

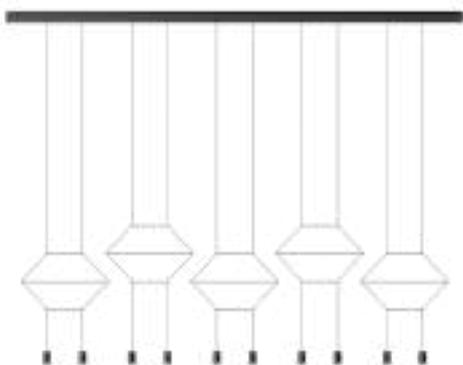

6 LEDs

0325


155 cm x max. 200 cm

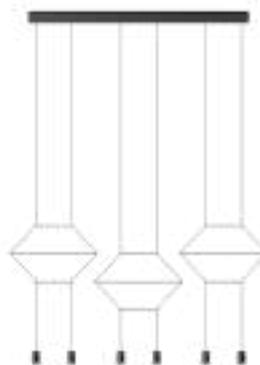


Personalise your own Wireflow Lineal composition quick and easy at vibia.com



Without pressed-glass diffuser.

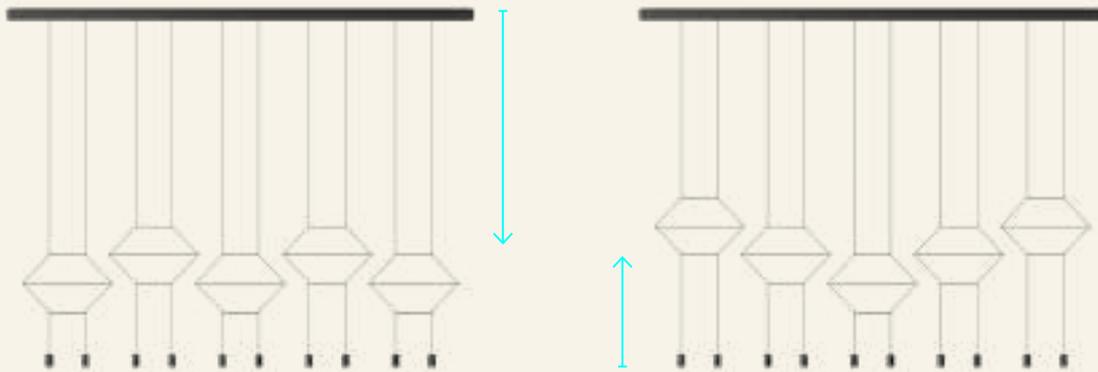

0320



Finishes
04/ ___ Black
 (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 970 lm
 D
 /2 _ 3000 K - 970 lm
 /3 _ 3500 K - 1000,6 lm
 E
 CRI >90

Control
0320 ___ / ___

___ / ___ 1 DALI-2
 ___ / ___ B Push; 1-10V
 ___ / ___ Z Casambi

Materials
 Diffuser: PC- Polycarbonate.
 Horizontal rods: Steel.
 Body and canopy: Aluminum.

Light Source and electronics
 2 x LED 4,5 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz


Packaging
 1 Box 0,20 x 0,075 x 0,70 m
 Vol 0,0150 m³
 Gross weight 5,1 Kg Net weight 2,6 Kg

Notes
 0320 ___ / ___ 1: DALI-2 Bi-volt
 0320 ___ / ___ B: Push; 1-10V Bi-volt

Linear canopy



0325



Finishes
 ● 04/ __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 2910 lm
 [D]
 /2 _ 3000 K - 2910 lm
 /3 _ 3500 K - 3001,8 lm
 [E]
 CRI >90

Control
 0325 __ / __
 __ / _ 1 DALI-2
 __ / _ B Push; 1-10V
 __ / _ Z Casambi

Materials
 Diffuser: PC- Polycarbonate.
 Horizontal rods: Steel.
 Body and canopy: Aluminum.


Light Source and electronics
 6 x LED 4,5 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,20 x 0,075 x 2,30 m
 Vol 0,0345 m³
 Gross weight 8 Kg Net weight 4,5 Kg

Notes
 0325 __ / _ B: Push; 1-10V [Bi-volt]
 Linear canopy



0330



Finishes
 ● 04/ __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 4850 lm
 [D]
 /2 _ 3000 K - 4850 lm
 /3 _ 3500 K - 5003 lm
 [E]
 CRI >90


Control
 0330 __ / __
 __ / _ 1 DALI-2
 __ / _ B Push; 1-10V
 __ / _ Z Casambi

Materials
 Diffuser: PC- Polycarbonate.
 Horizontal rods: Steel.
 Body and canopy: Aluminum.


Light Source and electronics
 10 x LED 4,5 W 700 mA
 Constant Current 350 mA
 220-240V 50/60Hz

Packaging
 1 Box 0,20 x 0,075 x 3,30 m
 Vol 0,0495 m³
 Gross weight 9,5 Kg Net weight 5,0 Kg

Notes
 Linear canopy



0338



Finishes
 ● 04/ __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 2910 lm
 [D]
 /2 _ 3000 K - 2910 lm
 /3 _ 3500 K - 3001,8 lm
 [E]
 CRI >90

Control
 0338 __ / __
 __ / _ 1 DALI-2
 __ / _ B Push; 1-10V
 __ / _ Z Casambi

Materials
 Diffuser: PC- Polycarbonate.
 Horizontal rods: Steel.
 Body and canopy: Aluminum.

Light Source and electronics
 6 x LED 4,5 W 700 mA
 Constant Current 700 mA
 220-240V 50/60Hz

Packaging
 1 Box 0,20 x 0,075 x 3,30 m
 Vol 0,0495 m³
 Gross weight 9,5 Kg Net weight 5,0 Kg

Notes
 Linear canopy





Wireflow Free

Design by Arik Levy

True to its name, Wireflow Free adapts easily to any environment. Its cables can be directed to form unexpected visual rhythms across a wall or ceiling, or to branch out from a central point and delineate specific activity zones within a space. Free offers maximum versatility in both form and function.

Pendant

0347
Ø 3 x 50 x 200cm



0348
Ø 3 x 50 x 200cm



0345
Ø 3 x 200cm



0361
Ø 3 x 200cm




0345

Finishes
 ● 04/ __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 485 lm
 /2 _ 3000 K - 485 lm
 /3 _ 3500 K - 500,3 lm
 CRI >90

Control
 0345 __ / __

__ / _ 1 DALI-2
 __ / _ B Push; 1-10V
 __ / _ Z Casambi



Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

_10 Surface
 _18 Free Wire
 _23 Built-in XS
 _31 Remote Micro
 _32 Remote XXS

Materials

Diffuser: Pressed-glass. Body: Aluminum. Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 700 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m
 Vol 0,0441 m³
 Gross weight 2,6 Kg Net weight 2,34 Kg

Notes

0345 __ / _ 1: DALI-2 **Bi-volt**
 0345 __ / _ B: Push; 1-10V **Bi-volt**

With pressed-glass diffuser.

Extra cable length.




0347

Finishes
 ● 04/ __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 490 lm
 CRI >80

Control
 0347 __ / 15 Push



Materials

Diffuser: PC- Polycarbonate. Body: Aluminum. Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m
 Vol 0,0055 m³
 Gross weight 1,5 Kg Net weight 1,35 Kg

Notes

Without pressed-glass diffuser.
 Electric cable 2,5 m. With plug.
 Dimmer push button on the wall plate.




0348

Finishes
 ● 04/ __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 490 lm
 CRI >80

Control
 0348 04 / 15 Push



Materials

Diffuser: Pressed-glass. Body: Aluminum. Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
 Vol 0,0175 m³
 Gross weight 1,9 Kg Net weight 1,71 Kg

Notes

With pressed-glass diffuser.
 Electric cable 2,5 m. With plug.
 Dimmer push button on the wall plate.




0361

Finishes
 ● 04/ __ Black
 (RAL 9005)

LED Colour Temperature
 /1_ 2700 K - 485 lm
 D
 /2_ 3000 K - 485 lm
 /3_ 3500 K - 500,3 lm
 E
 CRI >90

Control
 0361 __ / __
 __ / _1 DALI-2
 __ / _B Push; 1-10V
 __ / _Z Casambi



⚡ Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

_10 Surface
 _18 Free Wire
 _23 Built-in XS
 _31 Remote Micro
 _32 Remote XXS


Materials
 Diffuser: PC-Polycarbonate. Body: Aluminum.
 Canopy: Steel. Ceiling supports: POM.

Light Source and electronics
 1 x LED 4,5 W 700 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging
 1 Box 0,25 x 0,42 x 0,42 m
 Vol 0,0441 m³
 Gross weight 2,6 Kg Net weight 2,34 Kg


Notes
 0361 __ / _1: DALI-2 **Bi-volt**
 0361 __ / _B: Push; 1-10V **Bi-volt**
 Without pressed-glass diffuser.
 Additional cable length personalisation.



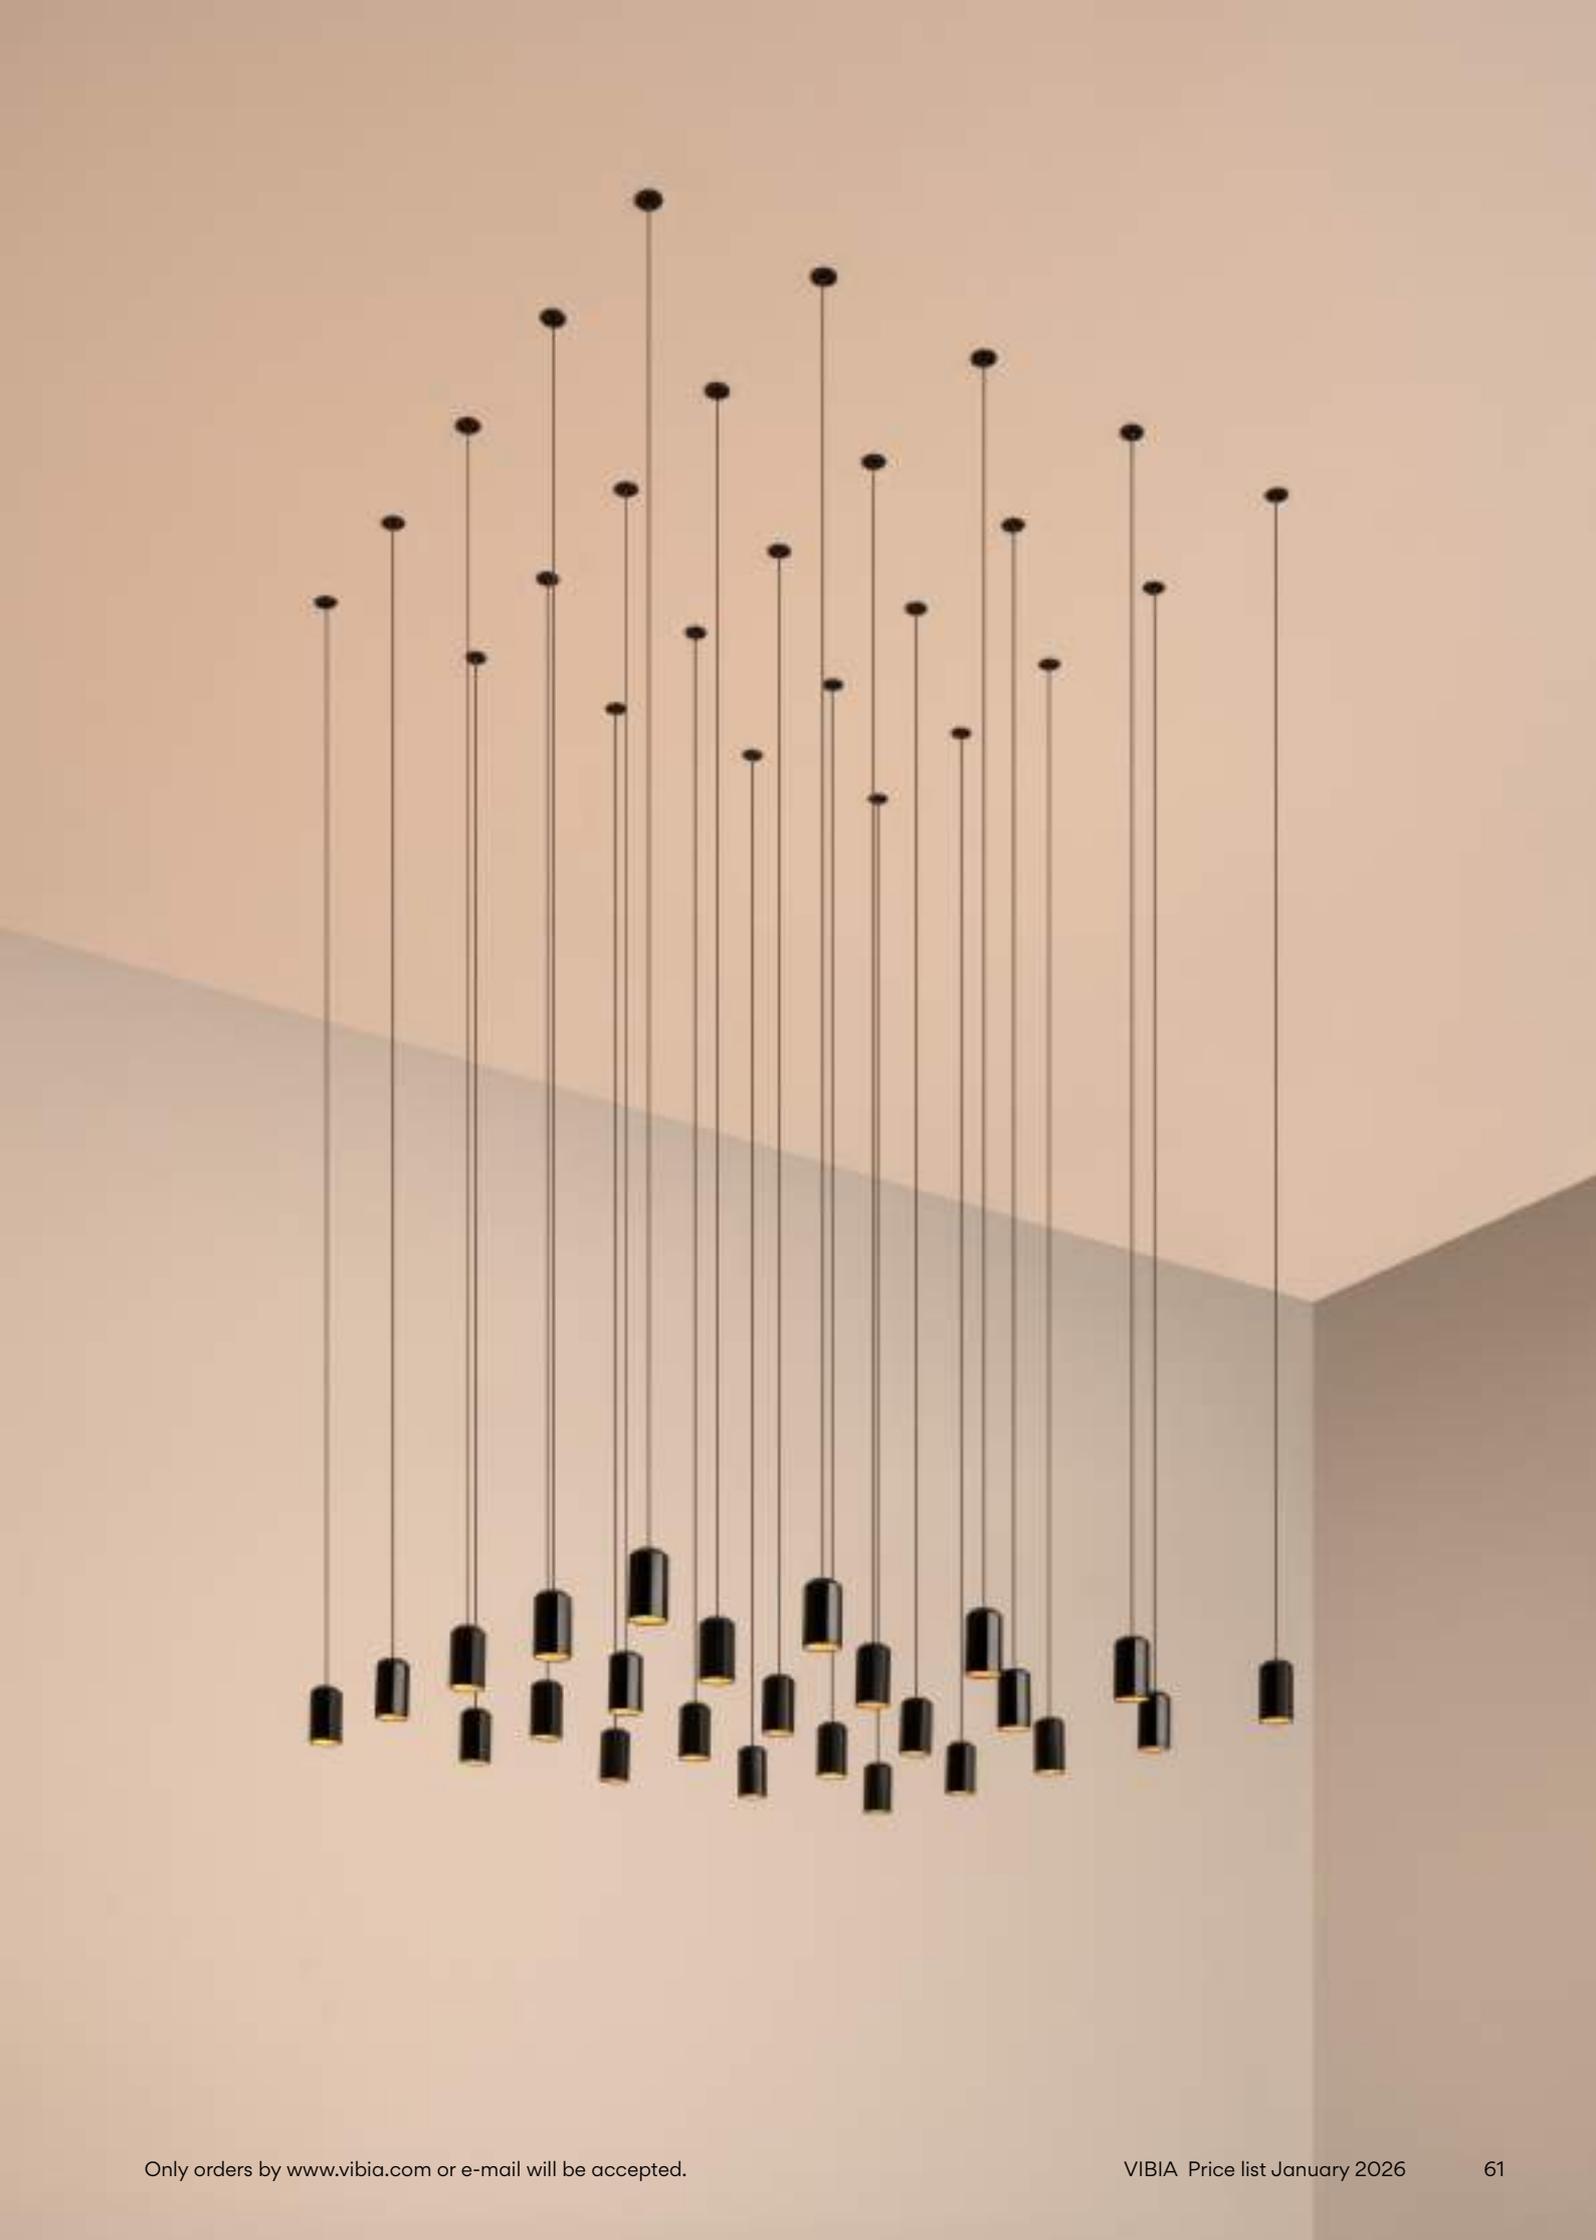

MULTIPLE MODELS

Select your model at vibia.com and adjust

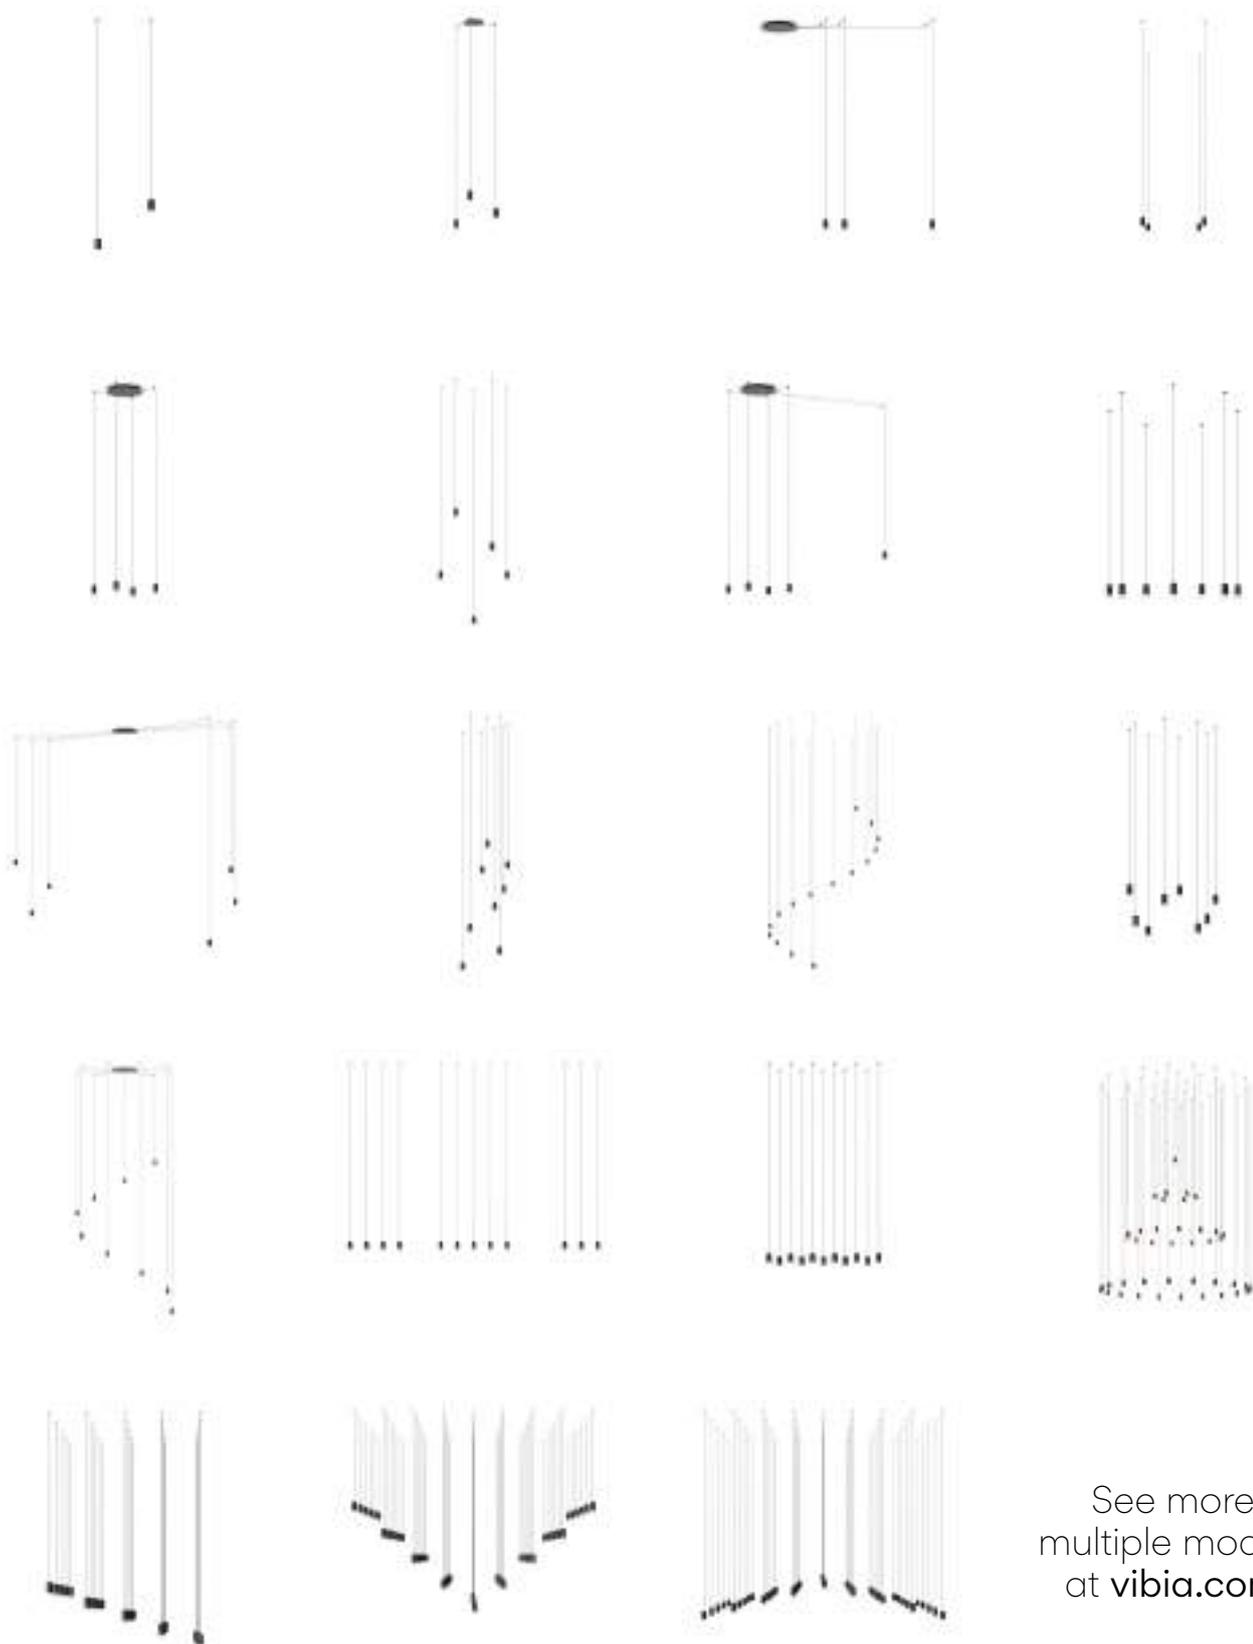

See more
multiple models
at vibia.com

Finishes

● **04/** _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K
/3 _ 3500 K
CRI >90

Control

Model _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0345, 0361

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.


_23
Built-in XS




Ø 8 cm
height 6 cm

match with fixture finish.

Remote



Built-in



Regular ceiling


_10
Surface



Ø 20 cm

match with fixture finish.

_18
Free Wire



1 - 3 wires

Ø 20 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.



4 - 6 wires

Ø 36 cm



7 - 9 wires

Ø 40 cm

Materials

Diffuser: Pressed-glass. / PC- Polycarbonate.
Body: Aluminum. Canopy: Steel.
Ceiling supports: POM.

Notes

Additional cable length from 2 m.



Wireflow Chandelier

Design by Arik Levy


Wireflow Chandelier is a contemporary reimagining of the traditional fixture. Its ultramodern silhouette provides an unexpected twist, while its graceful lines echo with a sense of timeless elegance. Though substantial in size its airy outline creates a feeling of transparency.

Pendant

20 LEDs

0315


120 x 279 cm

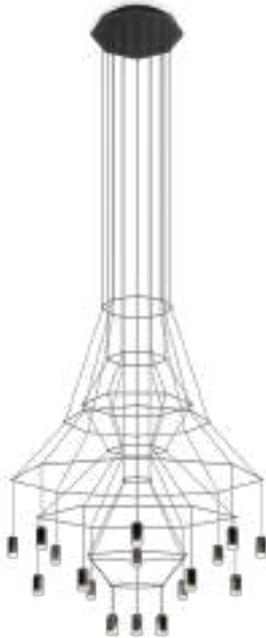

43 LEDs

0374

150 x 307 cm

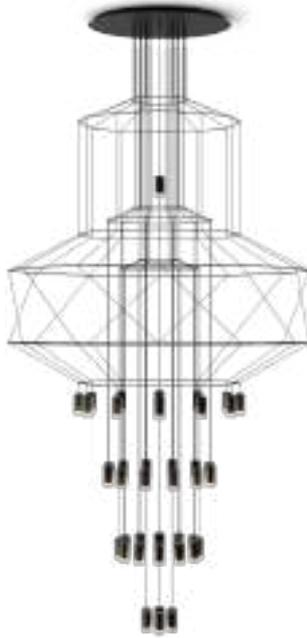

43 LEDs

0375

150 x 396 cm



42 LEDs

0376

150 x 112 cm



42 LEDs

0377


150 x 194 cm





42 LEDs

0378

150 x 276 cm

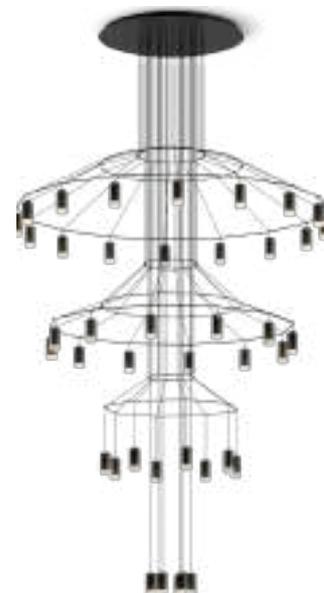

Personalise your own Wireflow Chandelier composition quick and easy at vibia.com

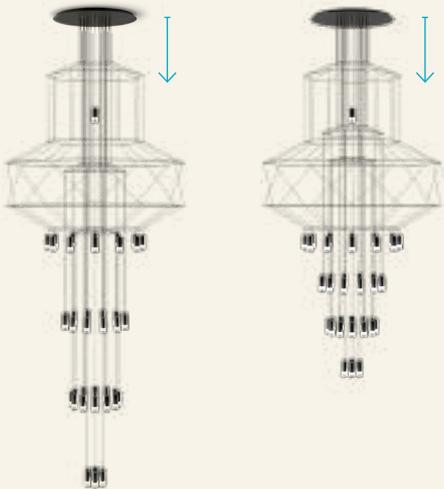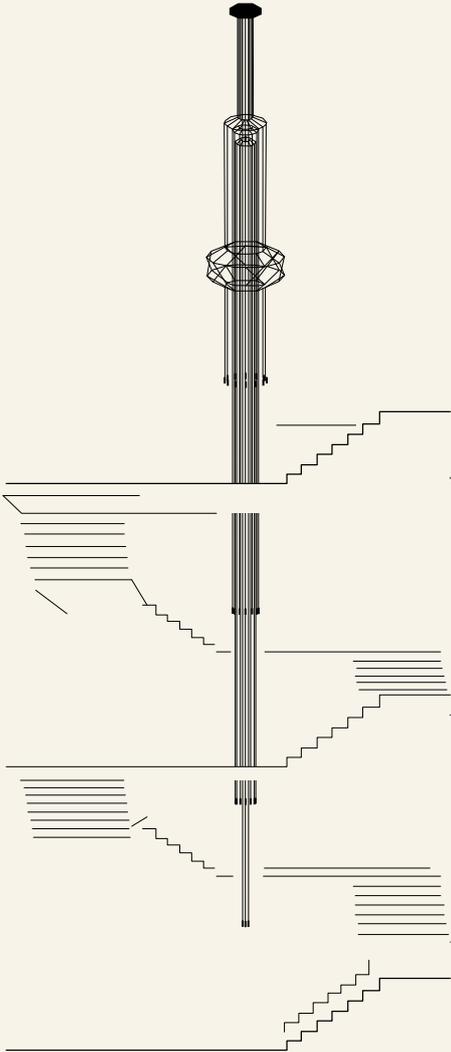


For configurations longer than 9 m, please ask Vibia customer service.



Wireflow Chandelier

0315

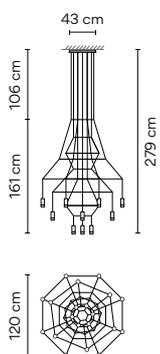

Finishes
 ● **04/** __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 9700 lm
 /2 _ 3000 K - 9700 lm
 /3 _ 3500 K - 10006,1 lm
E

Control
0315 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials
 Diffuser: Pressed-glass. Body: Aluminum.
 Canopy and horizontal rods: Steel.


Light Source and electronics
 20 x LED 4,5 W 700 mA
 Constant Current 700 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,3832 m³
 Gross weight 32 Kg Net weight 18 Kg

Notes
 Configuration layout at vibia.com
 Min. quantity, upcharge and extra lead time apply

LED IP20 CE UK ENEC

0374

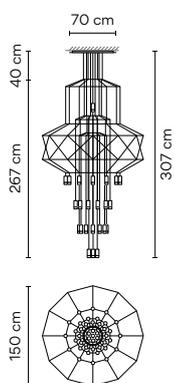

Finishes
 ● **04/** __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 20855 lm
 /2 _ 3000 K - 20855 lm
 /3 _ 3500 K - 21513,1 lm
E

Control
0374 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials
 Diffuser: Pressed-glass. Body: Aluminum.
 Canopy and horizontal rods: Steel.


Light Source and electronics
 43 x LED 4,5 W 700 mA
 Constant Current 700 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,5000 m³
 Gross weight 57 Kg Net weight 47 Kg

Notes
 Configuration layout at vibia.com
 Min. quantity, upcharge and extra lead time apply

LED IP20 CE UK ENEC

0375

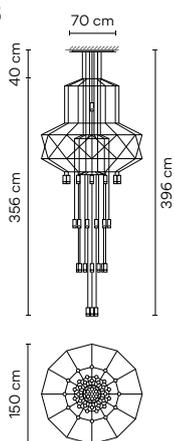

Finishes
 ● **04/** __ Black (RAL 9005)

LED Colour Temperature
 /1 _ 2700 K - 20855 lm
 /2 _ 3000 K - 20855 lm
 /3 _ 3500 K - 21513,1 lm
E

Control
0375 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials
 Diffuser: Pressed-glass. Body: Aluminum.
 Canopy and horizontal rods: Steel.


Light Source and electronics
 43 x LED 4,5 W 700 mA
 Constant Current 700 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,5000 m³
 Gross weight 57 Kg Net weight 47 Kg

Notes
 Configuration layout at vibia.com
 Min. quantity, upcharge and extra lead time apply

LED IP20 CE UK ENEC

0376



Finishes
● 04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control

0376 _ _ / _ _
_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply



0377



Finishes
● 04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control

0377 _ _ / _ _
_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply



0378

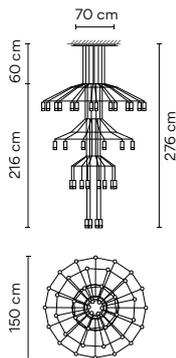

Finishes
● 04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control

0378 _ _ / _ _
_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply




I.Cono

Design by Lievore, Altherr, Molina

I.Cono is distinguished by its signature visor-shaped shade that's sleekly angled for a stylish look. Ideal for precision lighting or reading, its pure and clean design conceals its rotation mechanisms.

Table Floor Wall

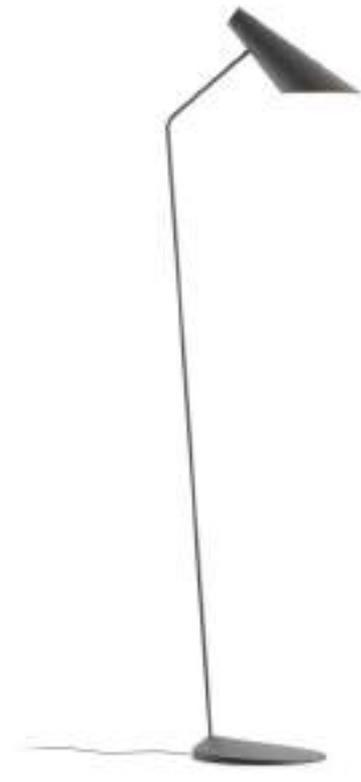

0712
21 x 130 x 35 cm



0700
17 x 56 x 32 cm




0720
15 x 17 x 26 cm



0721
15 x 17 x 26 cm

0700



Finishes

- **10 White**
(NCS S 0300-N)
- **21 Black Grey**
(NCS S 7000-N)
- **25 Beige D1**
(NCS S 4005-G80Y)
- **37 Terra Red**
(NCS S 4040-Y70R)
- **42 Blue M1**
(NCS S 5010-B10G)

Finish customization

(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

Materials

Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Tube: Iron. Base: Zinc Alloy.

Light Source and electronics

1 x LED 6W 350 mA
Constant current 350mA
100~240Vac 50/60Hz

LED Colour Temperature

/1_ 2700 K - 745 lm



CRI >90

Control

0700 __ / __

__ / 15 Push

__ / 1Y ProtoPixel*

__ / 1Z Casambi

Packaging

1 Box 0,81 x 0,31 x 0,33 m
Vol 0,08 m³
Gross weight 2,6 Kg Net weight 1,9 Kg


Notes

Electric cable 2,5 m.

On/off switch on the cable.



0712

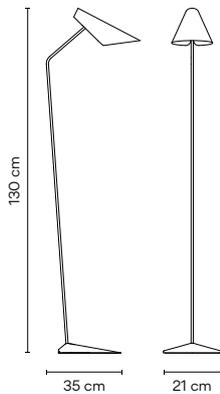

Finishes

- 10 White (NCS S 0300-N)
- 21 Black Grey (NCS S 7000-N)
- 25 Beige D1 (NCS S 4005-G80Y)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1_ 2700 K - 745 lm
E →
CRI >90

Control
0712 __ / __
__ / 15 Push
__ / 1Y ProtoPixel*
__ / 1Z Casambi

Materials
Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Tube: Iron. Base: Zinc Alloy.


Light Source and electronics
1 x LED 6W 350 mA
Constant current 350mA
100~240Vac 50/60Hz

Packaging
1 Box 1,43 x 0,30 x 0,30 m
Vol 0,13 m³
Gross weight 4 Kg Net weight 3 Kg

Notes
Electric cable 2,5 m.
On/off switch on the cable.



0720



Finishes

- 10 White (NCS S 0300-N)
- 21 Black Grey (NCS S 7000-N)
- 25 Beige D1 (NCS S 4005-G80Y)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1_ 2700 K - 745 lm
E →
CRI >90

Control
0720 __ / 10 On/ Off

Materials
Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Base: Aluminum. Tube: Iron.


Light Source and electronics
1 x LED 6W 350 mA
Constant current 350mA
220~240Vac 50/60Hz

Packaging
1 Box 0,20 x 0,21 x 0,13 m
Vol 0,00546 m³
Gross weight 1,1 Kg Net weight 0,8 Kg

Notes
On/off switch on the base.



0721



Finishes

- 10 White (NCS S 0300-N)
- 21 Black Grey (NCS S 7000-N)
- 25 Beige D1 (NCS S 4005-G80Y)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1_ 2700 K - 745 lm
E →
CRI >90

Control
0721 __ / __
__ / 10 On/ Off
__ / 1D_30 Push; DALI (Remote)
__ / 1Z_30 Casambi (Remote)

Materials
Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Base: Aluminum. Tube: Iron.

Light Source and electronics
1 x LED 6W 350 mA
Constant current 350mA
220~240Vac 50/60Hz

Packaging
1 Box 0,20 x 0,21 x 0,13 m
Vol 0,00546 m³
Gross weight 1,1 Kg Net weight 0,8 Kg

Notes
Without switch.



Algorithm Grid

Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Mathematical order provides a magical harmony with an astonishing range of permutations and compositions. Can be customized to suit any space.

Pendant

* Built-in version

6 LEDs

0830 *0832

123 x 25 cm



10 LEDs

0835 *0837

214 x 25 cm



14 LEDs

0840 *0842

306 x 25 cm



14 LEDs

0845 *0847

183 x 34 cm



29 LEDs

0850 *0852

399 x 34 cm



10 LEDs

0825 *0827

75 x 85 cm



13 LEDs

0860 *0862

110 x 110 cm



25 LEDs

0865 *0867

160 x 160 cm



15 LEDs

0870 *0872

110 x 60 cm








24 LEDs

0875 *0877

185 x 60 cm



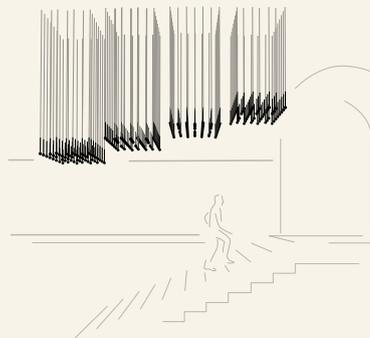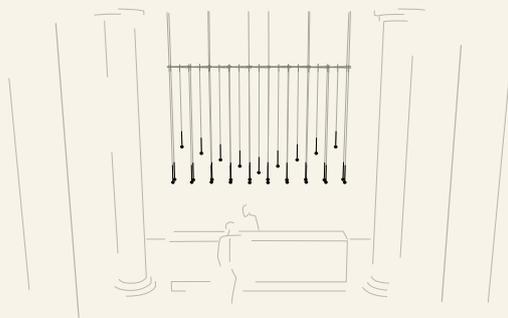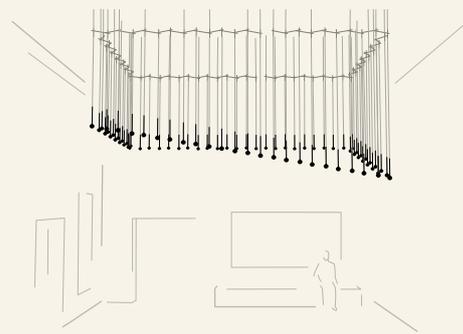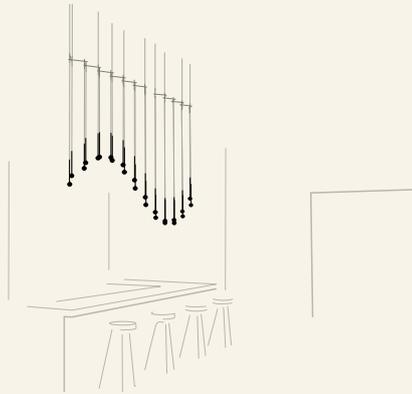

Surface.

Built-in.
11,5 cm Die-cut diameter,
12 cm minimum height in ceiling.

Adjustable cable installation.

Rigid stem installation.
Fixed at 25 cm.




Adjust height of standard model


To personalize luminaire height, without adjusting diffusers layout.

The steel cables that go from the structure to the ceiling are the only ones that allow the height of the lamp to be adjusted. The installation manual describes how to do this and how to cut the cables.

Personalise your own
Algorithm composition
quick and easy at
vibia.com

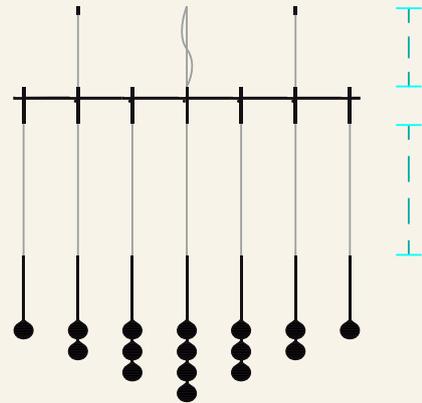

0825



Finishes

● 18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K - 3122,8 lm
/3 _ 3500 K - 3122,8 lm

F
CRI >90

Control

0825 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,324 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes

Surface

LED IP20 CE UK ENE Bi-volt

0827



Finishes

● 18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K - 3122,8 lm
/3 _ 3500 K - 3122,8 lm

F
CRI >90

Control

0827 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,324 m³
Gross weight 15,5 Kg Net weight 10,5 Kg


Notes

Built-in

LED IP20 CE UK ENE

Bi-volt Ø 10,5 cm

0830



Finishes
 ● 18/ __ Graphite (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 1873,68 lm
 /3 _ 3500 K - 1873,7 lm

Control
 0830 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
 6 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,1705 m³
 Gross weight 3,5 Kg Net weight 5,8 Kg

Notes
 Surface

LED IP20 CE UK ENEC Bi-volt

0832



Finishes
 ● 18/ __ Graphite (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 1873,68 lm
 /3 _ 3500 K - 1873,7 lm

Control
 0832 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
 6 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,1705 m³
 Gross weight 3,5 Kg Net weight 5,8 Kg

Notes
 Built-in

LED IP20 CE UK ENEC Bi-volt Ø 10,5 cm

0835



Finishes
 ● 18/ __ Graphite (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 3122,8 lm
 /3 _ 3500 K - 3122,8 lm

Control
 0835 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
 10 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,3220 m³
 Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
 Surface

LED IP20 CE UK ENEC Bi-volt

0837



Finishes
 ● 18/ __ Graphite (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 3122,8 lm
 /3 _ 3500 K - 3122,8 lm

Control
 0837 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
 10 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,3220 m³
 Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
 Built-in

LED IP20 CE UK ENEC Bi-volt Ø 10,5 cm

0840



Finishes **18/** __ Graphite (ADAPTA RF9913WX)
 LED Colour Temperature /1 _ 2700 K - 4371,92 lm /3 _ 3500 K - 4371,92 lm
 F →
 CRI >90

Control **0840** __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

14 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging


3 Boxes
 Total Vol 0,5275 m³
 Gross weight 17,3 Kg Net weight 11,3 Kg

Notes

Surface



0842



Finishes **18/** __ Graphite (ADAPTA RF9913WX)
 LED Colour Temperature /1 _ 2700 K - 4371,92 lm /3 _ 3500 K - 4371,92 lm
 F →
 CRI >90

Control **0842** __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics


14 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging


3 Boxes
 Total Vol 0,5275 m³
 Gross weight 17,3 Kg Net weight 11,3 Kg

Notes

Built-in



0845



Finishes **18/** __ Graphite (ADAPTA RF9913WX)
 LED Colour Temperature /1 _ 2700 K - 4371,92 lm /3 _ 3500 K - 4371,92 lm
 F →
 CRI >90

Control **0845** __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

14 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging


2 Boxes
 Total Vol 0,3220 m³
 Gross weight 18,3 Kg Net weight 13,3 Kg

Notes

Surface



0847



Finishes **18/** __ Graphite (ADAPTA RF9913WX)
 LED Colour Temperature /1 _ 2700 K - 4371,92 lm /3 _ 3500 K - 4371,92 lm
 F →
 CRI >90

Control **0847** __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

14 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging


2 Boxes
 Total Vol 0,3220 m³
 Gross weight 18,3 Kg Net weight 13,3 Kg

Notes

Built-in



0850



Finishes
 ● 18/ __ Graphite (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 9056,12 lm
 /3 _ 3500 K - 9056,12 lm
 F →
 CRI >90

Control
 0850 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi


Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
 29 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,6260 m³
 Gross weight 26 Kg Net weight 20 Kg

Notes
 Surface
 LED IP20 CE UK ENEC Dimmer Bi-volt

0852



Finishes
 ● 18/ __ Graphite (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 9056,12 lm
 /3 _ 3500 K - 9056,12 lm
 F →
 CRI >90

Control
 0852 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi


Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
 29 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,6260 m³
 Gross weight 26 Kg Net weight 20 Kg

Notes
 Built-in
 LED IP20 CE UK ENEC Bi-volt Ø 10,5 cm

0860



Finishes
 ● 18/ __ Graphite (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 4059,64 lm
 /3 _ 3500 K - 4059,64 lm
 F →
 CRI >90

Control
 0860 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi


Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
 13 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,3290 m³
 Gross weight 17,35 Kg Net weight 11,85 Kg

Notes
 Surface
 LED IP20 CE UK ENEC Bi-volt

0862



Finishes
 ● 18/ __ Graphite (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 4059,64 lm
 /3 _ 3500 K - 4059,64 lm
 F →
 CRI >90

Control
 0862 __ / __
 __ / __ A Push; 1-10V; DALI-2
 __ / __ Z Casambi


Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
 13 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,3290 m³
 Gross weight 17,35 Kg Net weight 11,85 Kg

Notes
 Built-in
 LED IP20 CE UK ENEC Bi-volt Ø 10,5 cm

0865



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 7807 lm
 /3 _ 3500 K - 7807 lm
 F →
 CRI >90

Control
0865 __ / __
 __ / _ A Push; 1-10V; DALI-2
 __ / _ Z Casambi

Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
 25 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,7280 m³
 Gross weight 25,25 Kg Net weight 20,25 Kg

Notes
 Surface

LED IP20 CE UK ENE Bi-volt

0867



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 7807 lm
 /3 _ 3500 K - 7807 lm
 F →
 CRI >90

Control
0867 __ / __
 __ / _ A Push; 1-10V; DALI-2
 __ / _ Z Casambi

Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
 25 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,7280 m³
 Gross weight 25,25 Kg Net weight 20,25 Kg

Notes
 Built-in

LED IP20 CE UK ENE Bi-volt ∅ 10,5 cm

0870



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 4684,2 lm
 /3 _ 3500 K - 4684,2 lm
 F →
 CRI >90

Control
0870 __ / __
 __ / _ A Push; 1-10V; DALI-2
 __ / _ Z Casambi

Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
 15 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,2679 m³
 Gross weight 18,25 Kg Net weight 13,75 Kg

Notes
 Surface

LED IP20 CE UK ENE Bi-volt

0872



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 4684,2 lm
 /3 _ 3500 K - 4684,2 lm
 F →
 CRI >90

Control
0872 __ / __
 __ / _ A Push; 1-10V; DALI-2
 __ / _ Z Casambi

Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.


Light Source and electronics
 15 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,2679 m³
 Gross weight 18,25 Kg Net weight 13,75 Kg

Notes
 Built-in

LED IP20 CE UK ENE Bi-volt ∅ 10,5 cm

0875



Finishes
 ● 18/ _ _ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 7494,72 lm
 /3 _ 3500 K - 7494,72 lm
 F →
 CRI >90

Control
0875 _ _ / _ _
 _ _ / _ A Push; 1-10V; DALI-2
 _ _ / _ Z Casambi


Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
 24 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,4500 m³
 Gross weight 30,1 Kg Net weight 22,1 Kg

Notes
 Surface
 LED IP20 CE UK ENE Bi-volt

0877



Finishes
 ● 18/ _ _ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature
 /1 _ 2700 K - 7494,72 lm
 /3 _ 3500 K - 7494,72 lm
 F →
 CRI >90

Control
0877 _ _ / _ _
 _ _ / _ A Push; 1-10V; DALI-2
 _ _ / _ Z Casambi

Materials
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
 Glass fastening: Aluminum. Canopy: Steel.
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
 24 x LED 3,15 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,4500 m³
 Gross weight 30,1 Kg Net weight 22,1 Kg

Notes
 Built-in
 LED IP20 CE UK ENE Bi-volt Ø 10,5 cm



Algorithm Free

Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Each unique grouping of globes defines areas of interior space, underlining their multiple uses while becoming a single aesthetic element.

1160	10	/1A	18
Model	Finish	LED Colour Temperature	Control
Electrical connection Only for pendant			

INDIVIDUAL MODEL

Pendant

0820

Ø 9 cm



0820

Finishes


- **18/** _ _ Graphite (ADAPTA RF9913WX)

LED Colour Temperature

- /1** _ 2700 K - 312,28 lm
 - /3** _ 3500 K - 312,3 lm
- CRI >90

Control

- 0820** _ _ / _ _
- _ _ / _ A Push; 1-10V; DALI-2
 - _ _ / _ Z Casambi



Select Electrical connection



- Surface
- Free Wire
- Built-in XS
- Remote Micro
- Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

1 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

1 Box 0,18 x 0,55 x 0,55 m
Vol 0,0131 m³
Gross weight 2,17 Kg Net weight 1,57 Kg

Notes

0820 _ _ / _ A: Push; 1-10V; DALI-2 **Bi-volt**

Surface.


Extra cable length.





MULTIPLE MODELS

Select your model at vibia.com and adjust

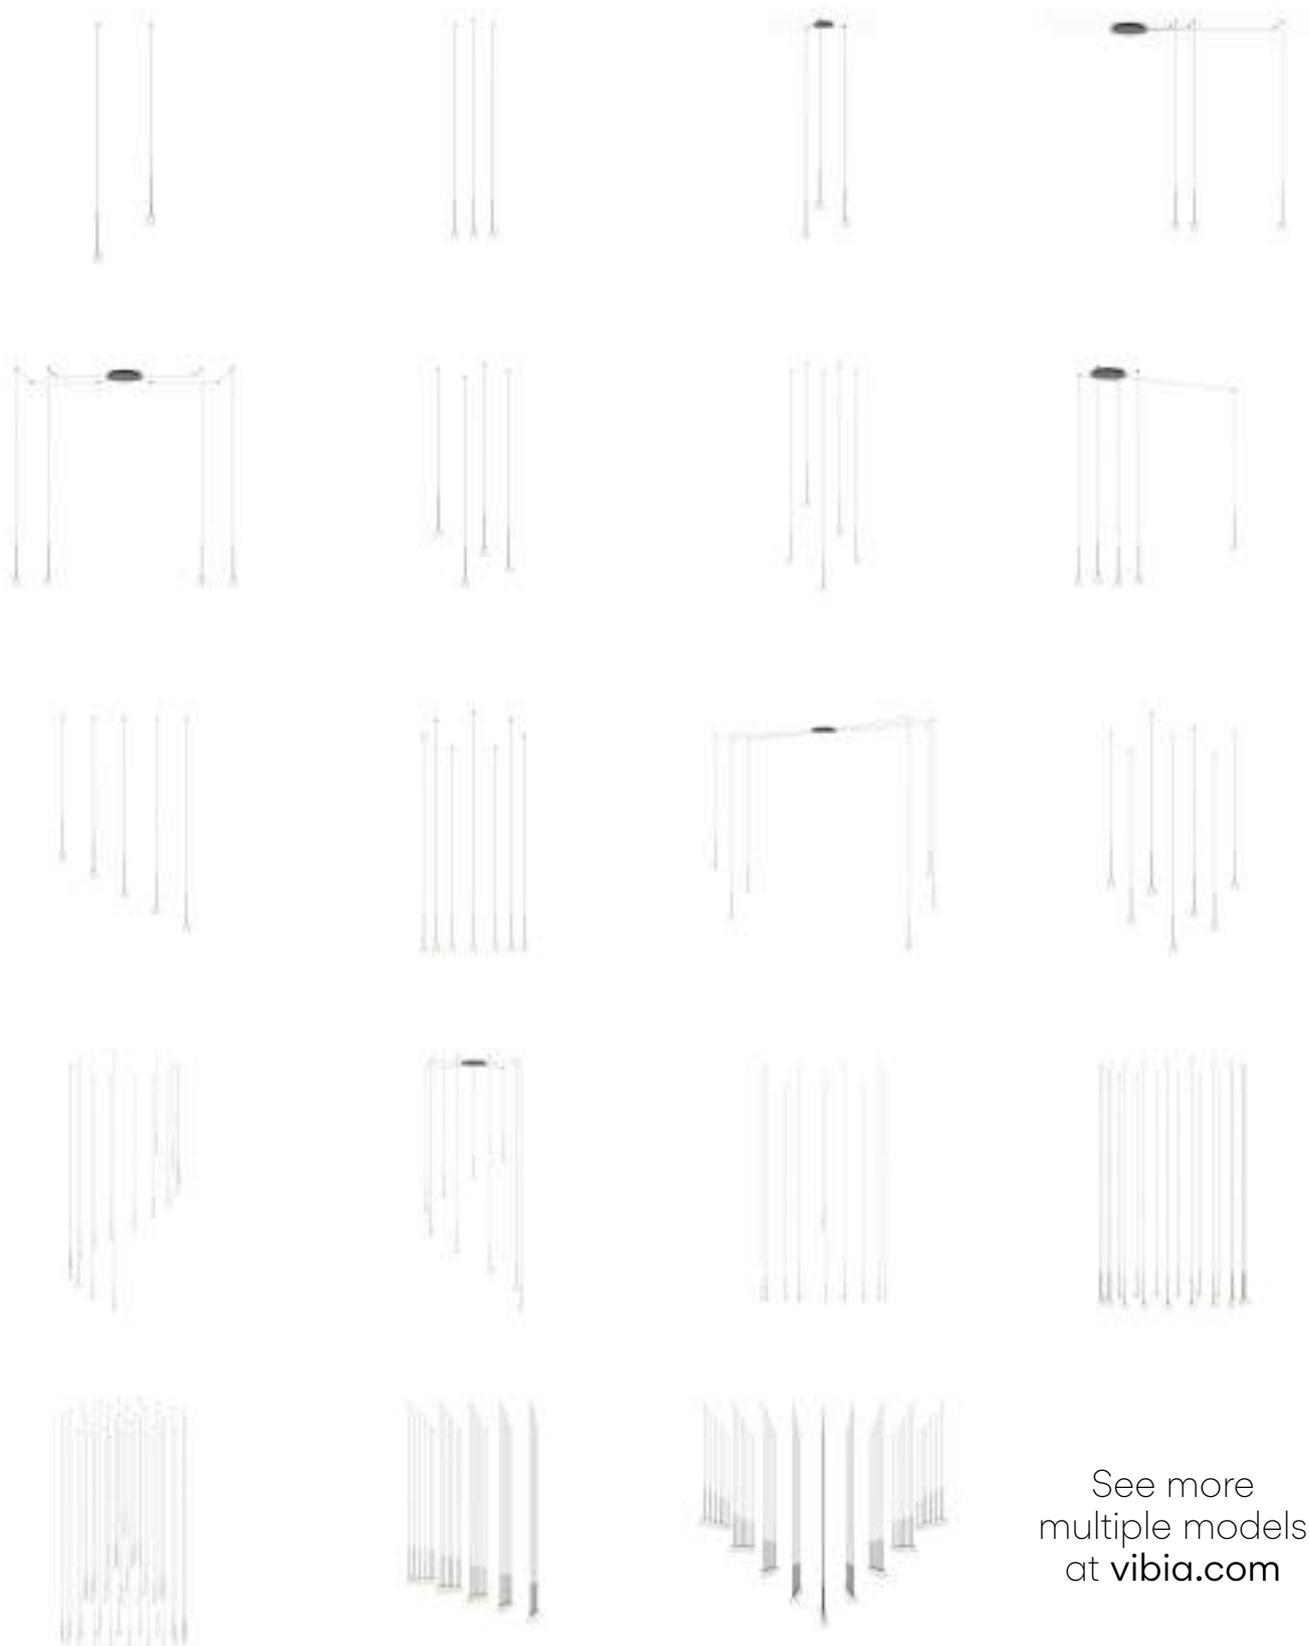

See more
multiple models
at vibia.com

Finishes

● 18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1_ 2700 K
/3_ 3500 K
CRI >90

Control

0820 _ _ / _ _
_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0820

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.


_23
Built-in XS




Ø 8 cm
height 6 cm

match with fixture finish.

Remote



Built-in



Regular ceiling

_10
Surface



Ø 19 cm

match with fixture finish.



1 - 3 wires

Ø 22 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.



4 - 6 wires

Ø 36 cm



7 - 9 wires

Ø 40 cm

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Notes

Additional cable length from 2 m.

LED IP20 CE UK ENE Bi-volt

Slim

Design by Jordi Vilardell

Streamlined and refined,
Slim serves as a sleek punctuation mark.

Pendant


INDIVIDUAL MODEL

0920

Ø 2,6 cm



MULTIPLE MODELS

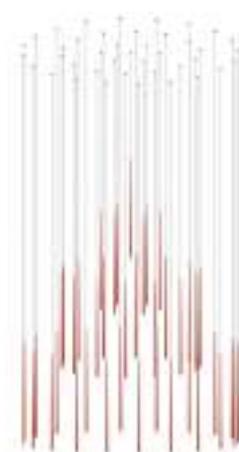

INDIVIDUAL MODEL

0920

Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500-N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)
- 68/ _ _ Ocre (NCS S 3050-Y30R)


Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

LED Colour Temperature

- /1 _ 2700 K - 181,22 lm
 F >90
- /2 _ 3000 K - 163,2 lm
 G >80
- /3 _ 3500 K - 207,6 lm
 F >90

Control

- 0920 _ _ / _ _
- _ _ / _ 0 On/ Off
 - _ _ / _ 1 DALI-2
 - _ _ / _ B Push; 1-10V
 - _ _ / _ Z Casambi



Select Electrical connection



Surface Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: Glass.
 Body: FG- Fiberglass.
 Canopy: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
 Constant Current 700 mA
 100-240V 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 1,20 m
 Vol 0,0155 m³
 Gross weight 2,14 Kg Net weight 1,2 Kg


Notes

- 0920 _ _ / _ 0: On/ Off Bi-volt
 - 0920 _ _ / _ 1: DALI-2 Bi-volt
 - 0920 _ _ / _ B: Push; 1-10V Bi-volt
- Extra cable length.



MULTIPLE MODELS

Select your model at vibia.com and adjust

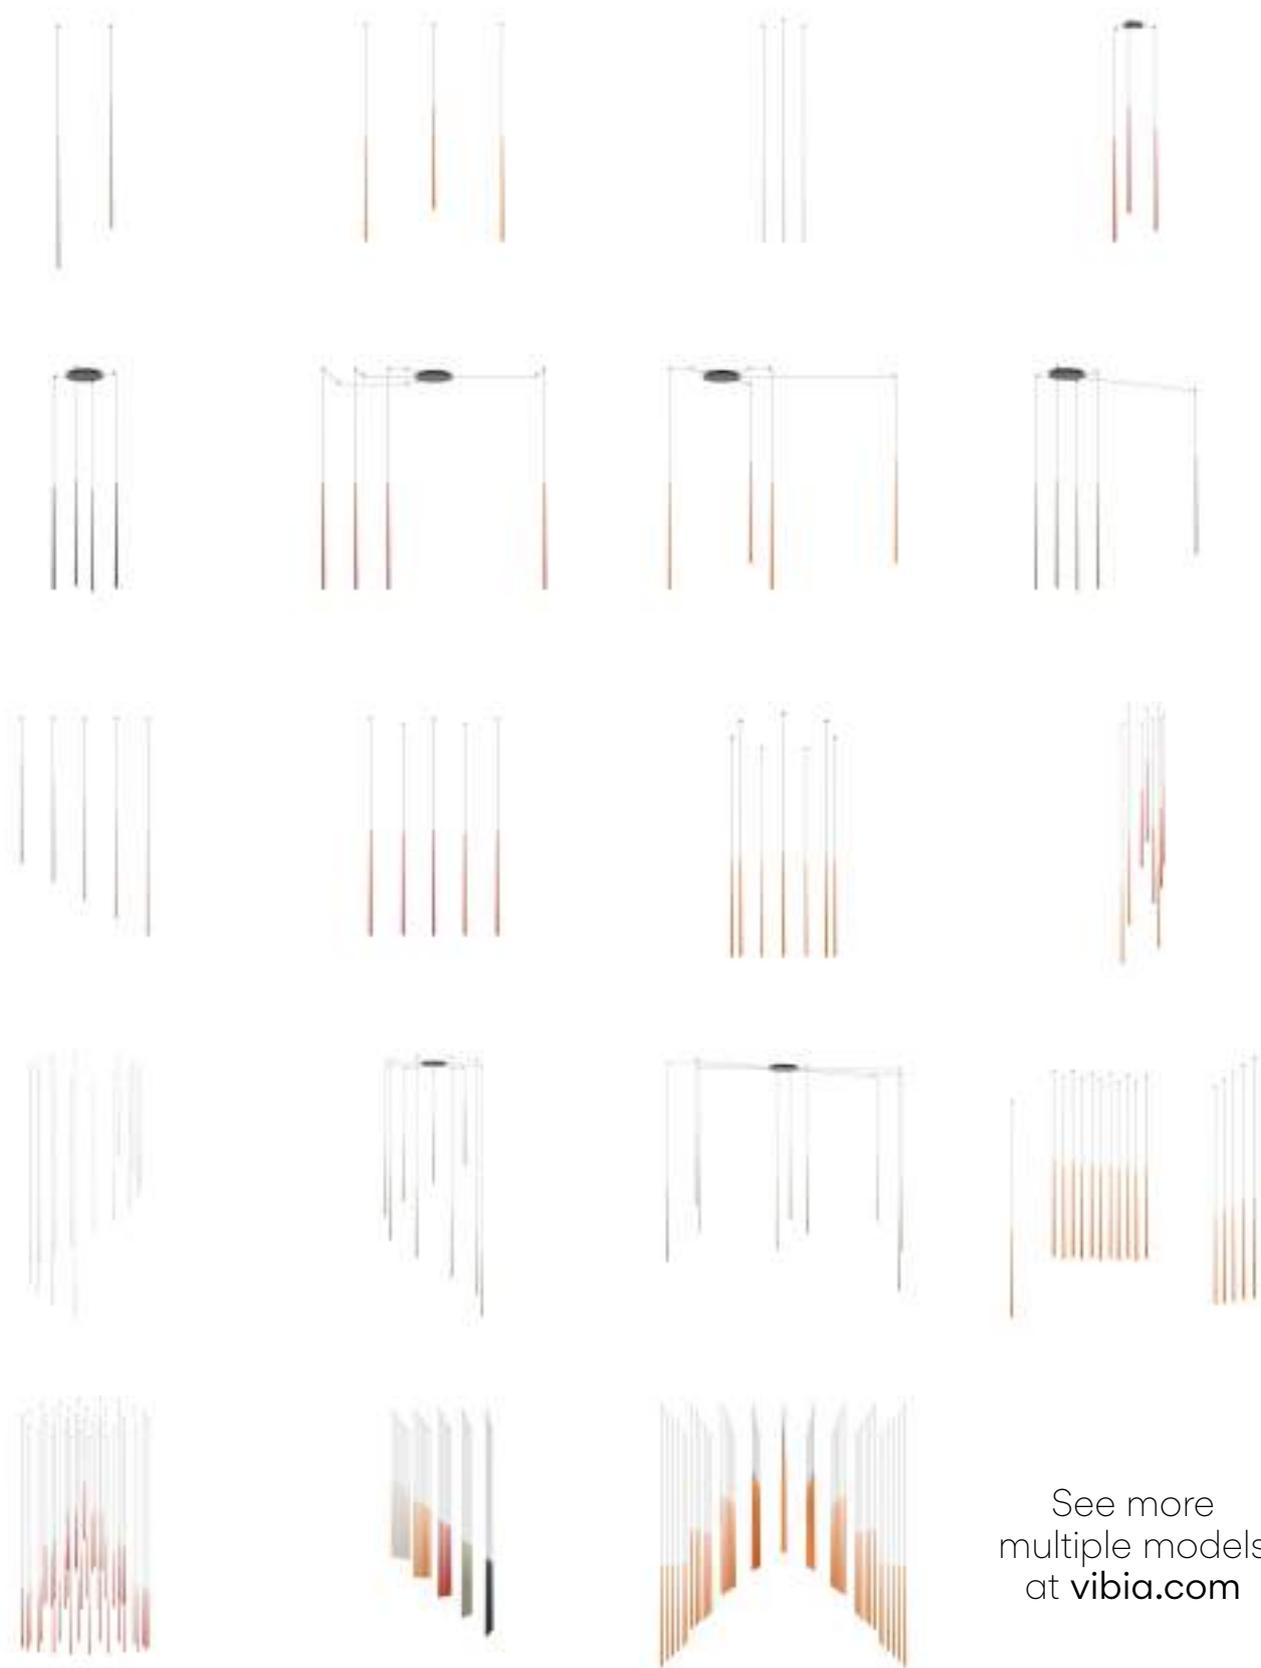

See more
multiple models
at vibia.com

Finishes

10/ __ White
(NCS S 0300-N)
11/ __ Black
(NCS S 8500-N)
24/ __ Beige M1
(NCS S 2005-Y50R)
37/ __ Terra Red
(NCS S 4040-Y70R)
47/ __ Green L1
(NCS S 4005-G80Y)
68/ __ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 2700 K
/2 3000 K
/3 3500 K
CRI >90

Control

Model __ / __
__ / **0** On/ Off
__ / **1** DALI-2
__ / **B** Push; 1-10V
__ / **Z** Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0920 __ / __ 0

Drop ceiling

_31 Remote Micro	_32 Remote XXS	_23 Built-in XS
		
Ø 3 cm height 7 cm	Ø 6 cm height 6 cm	Ø 8 cm height 6 cm
for plaster ceilings. Black finish.	for all types of drop ceilings. Match with fixture finish.	match with fixture finish.

Regular ceiling

_10 Surface	_18 Free Wire		
			
Ø 17,3 cm	Ø 20 cm	Ø 36 cm	Ø 40 cm
match with fixture finish.	you can choose the finish of the canopy among black, white or any colour matching one of the pendant.		

For Ref. 0920 __ / __ 1 / __ B / __ Z


Drop ceiling

_31 Remote Micro	_32 Remote XXS	_23 Built-in XS
		
Ø 3 cm height 7 cm	Ø 6 cm height 6 cm	Ø 8 cm height 6 cm
for plaster ceilings. Black finish.	for all types of drop ceilings. Match with fixture finish.	match with fixture finish.


Regular ceiling

_10 Surface	_18 Free Wire		
			
Ø 20 cm	Ø 20 cm	Ø 36 cm	Ø 40 cm
match with fixture finish.	you can choose the finish of the canopy among black, white or any colour matching one of the pendant.		

Remote



Built-in



Materials


Diffuser: Glass. Body: FG- Fiberglass .
Canopy: Steel.

Notes

Additional cable length
from 2 m.




Pendant

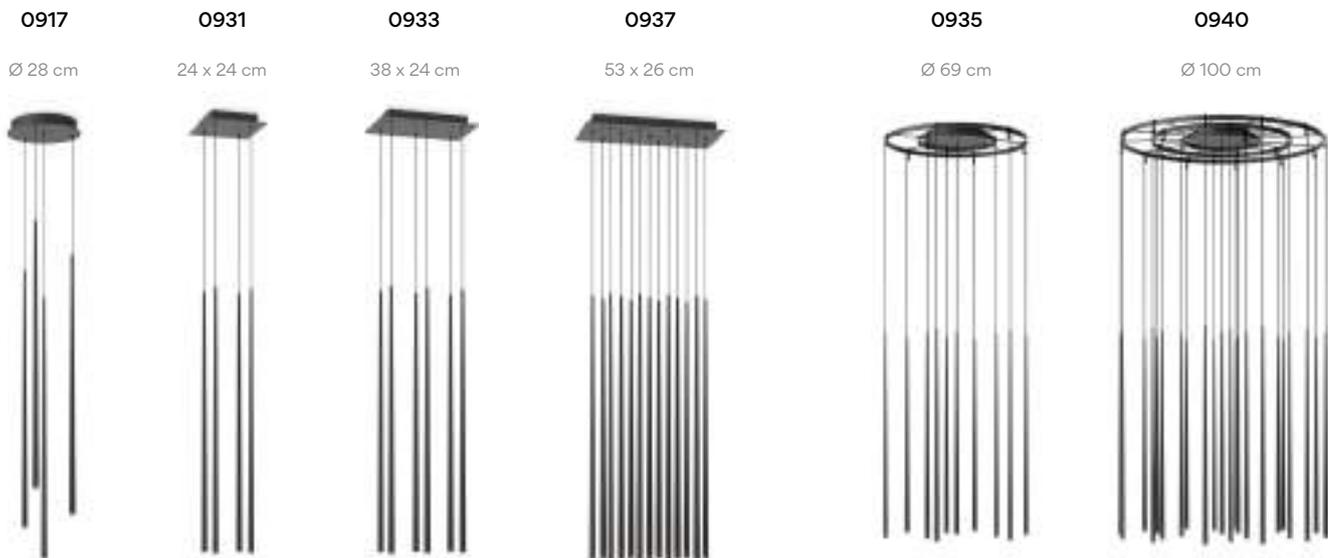

MULTIPLE MODELS

0917



Finishes

- 10/ __ White (NCS S 0300-N)
- 11/ __ Black (NCS S 8500-N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 37/ __ Terra Red (NCS S 4040-Y70R)
- 47/ __ Green L1 (NCS S 4005-G80Y)
- 68/ __ Ocre (NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

4 x LED 2,1 W 700mA
Constant Current 700 mA
110-240V 50/60Hz

LED Colour Temperature

- /1_ 2700 K - 724,88 lm
F
- CRI >90
- /2_ 3000 K - 652,8 lm
G
- CRI >80
- /3_ 3500 K - 830,6 lm
F
- CRI >90

Control

- 0917 __ / __
-
- __ / _ 1 DALI-2
 - __ / _ B Push; 1-10V
 - __ / _ Z Casambi

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1278 m³
Gross weight 8 Kg Net weight 5,2 Kg


Notes

- 0917 __ / _ 1: DALI-2 **Bi-volt**
- 0917 __ / _ B: Push; 1-10V **Bi-volt**

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT



0931



Finishes

- 10/ __ White
(NCS S 0300-N)
- 11/ __ Black
(NCS S 8500-N)
- 24/ __ Beige M1
(NCS S 2005-Y50R)
- 37/ __ Terra Red
(NCS S 4040-Y70R)
- 47/ __ Green L1
(NCS S 4005-G80Y)
- 68/ __ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1_ 2700 K - 724,88 lm
[F]
- CRI >90
- /2_ 3000 K - 652,8 lm
[G]
- CRI >80
- /3_ 3500 K - 830,6 lm
[F]
- CRI >90

Control

- 0931 __ / __
-
- __ / _ 1 DALI-2
- __ / _ B Push; 1-10V
- __ / _ Z Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

4 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 8 Kg Net weight 5,2 Kg

Notes

0931 __ / _ 1: DALI-2 [Bi-volt]


0931 __ / _ B: Push; 1-10V [Bi-volt]

Surface.
Extra cable length.

UNTIL STOCK RUNS OUT



0933



Finishes

- 10/ __ White
(NCS S 0300-N)
- 11/ __ Black
(NCS S 8500-N)
- 24/ __ Beige M1
(NCS S 2005-Y50R)
- 37/ __ Terra Red
(NCS S 4040-Y70R)
- 47/ __ Green L1
(NCS S 4005-G80Y)
- 68/ __ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1_ 2700 K - 1087,32 lm
[F]
- CRI >90
- /2_ 3000 K - 979,2 lm
[G]
- CRI >90
- /3_ 3500 K - 1245,9 lm
[F]
- CRI >90

Control

- 0933 __ / __
-
- __ / _ 1 DALI-2
- __ / _ B Push; 1-10V
- __ / _ Z Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

6 x LED 2,1 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 12,5 Kg Net weight 9,1 Kg

Notes

0933 __ / _ 1: DALI-2 [Bi-volt]


0933 __ / _ B: Push; 1-10V [Bi-volt]

Surface.
Extra cable length.

UNTIL STOCK RUNS OUT



0935



Finishes

10/ __ White
(NCS S 0300-N)
11/ __ Black
(NCS S 8500-N)
24/ __ Beige M1
(NCS S 2005-Y50R)
37/ __ Terra Red
(NCS S 4040-Y70R)
47/ __ Green L1
(NCS S 4005-G80Y)
68/ __ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%

LED Colour Temperature

/1 _ 2700 K - 954,5 lm
CRI >90
/2 _ 3000 K - 1140 lm
CRI >80
/3 _ 3500 K - 1093,7 lm
CRI >90



Control

0935 __ / __

__ / _ **1** DALI-2
__ / _ **B** Push; 1-10V
__ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

10 x LED 1W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 1,14 x 1,14 x 0,34 m
Vol 0,4410 m³
Gross weight 19,2 Kg Net weight 14,2 Kg

Notes

0935 __ / _ **1**: DALI-2 **Bi-volt**
0935 __ / _ **B**: Push; 1-10V **Bi-volt**


Surface.

Extra cable length.

UNTIL STOCK RUNS OUT



0937



Finishes

10/ __ White
(NCS S 0300-N)
11/ __ Black
(NCS S 8500-N)
24/ __ Beige M1
(NCS S 2005-Y50R)
37/ __ Terra Red
(NCS S 4040-Y70R)
47/ __ Green L1
(NCS S 4005-G80Y)
68/ __ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%

LED Colour Temperature

/1 _ 2700 K - 2355,86 lm
F
CRI >90
/2 _ 3000 K - 2121,6 lm
G
CRI >80
/3 _ 3500 K - 2699,4 lm
F
CRI >90

Control

0937 __ / __

__ / _ **1** DALI-2
__ / _ **B** Push; 1-10V
__ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

13 x LED 2,1W 700mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 12,5 Kg Net weight 18,46 Kg

Notes


Surface.

Extra cable length.

UNTIL STOCK RUNS OUT



0940



Finishes

- 10/** __ White
(NCS S 0300-N)
- 11/** __ Black
(NCS S 8500-N)
- 24/** __ Beige M1
(NCS S 2005-Y50R)
- 37/** __ Terra Red
(NCS S 4040-Y70R)
- 47/** __ Green L1
(NCS S 4005-G80Y)
- 68/** __ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1** _ 2700 K - 2099,9 lm
CRI >90
- /2** _ 3000 K - 2508 lm
CRI >80
- /3** _ 3500 K - 2406,1 lm
CRI >90



Control

0940 __ / __

- __ / **1** DALI-2
- __ / **B** Push; 1-10V
- __ / **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

22 x LED 1 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 1,14 x 1,14 x 0,34 m
Vol 0,4420 m³
Gross weight 29,9 Kg Net weight 21,9 Kg

Notes

0940 __ / __ 1: DALI-2 **Bi-volt**
0940 __ / __ B: Push; 1-10V **Bi-volt**

Surface.

Extra cable length.

UNTIL STOCK RUNS OUT



Top

Design by Ramos & Bassols

Soft, spherical shapes and a warm luminescence characterize the Top collection. Its glowing epicenter is encircled by a larger ring, lending the look of framing the light within its pure geometry.

Ceiling Wall



1154

Ø 17 cm

1155

Ø 40 cm


1160

Ø 60 cm

1170

Ø 90 cm

1154



Finishes

10/ _ _ White
(NCS S 0300-N)
36/ _ _ Soft pink
(NCS S 1010-Y50R)
40/ _ _ Blue L1
(NCS S 3010-B)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 550 lm
E
/3 _ 3500 K - 540,2 lm
F
CRI >90

Control

1154 _ _ / _ 0 On/ Off

Materials

Body: Aluminum.

Light Source and electronics


1 x LED PLATE 5,5 W 150 mA
Constant Current 150 mA
100-240V 50/60Hz

Packaging

1 Box 0,2 x 0,2 x 0,1 m
Vol 0,004 m³
Gross weight 0,8 Kg Net weight 0,5 Kg

LED ⓘ IP20 CE UK ENEC

1155



Finishes

10/ _ _ White
(NCS S 0300-N)
36/ _ _ Soft pink
(NCS S 1010-Y50R)
40/ _ _ Blue L1
(NCS S 3010-B)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2050 lm
F
/3 _ 3500 K - 2013,4 lm
G
CRI >90

Control

1155 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Materials

Body: Aluminum.

Light Source and electronics

1 x LED PLATE 18,3 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz


Packaging

1 Box 0,45 x 0,45 x 0,15 m
Vol 0,03 m³
Gross weight 1,8 Kg Net weight 1,5 Kg

LED ⓘ IP20 CE UK ENEC



1160



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 36/ _ _ Soft pink (NCS S 1010-Y50R)
- 40/ _ _ Blue L1 (NCS S 3010-B)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

- /1_ 2700 K - 2880 lm E
- /3_ 3500 K - 2828,6 lm F
- CRI >90

Control

- 1160 _ _ / _ _
-
- _ _ / _ _ A Push; 1-10V; DALI-2
- _ _ / _ _ Z Casambi

Materials

Body: Aluminum.


Light Source and electronics
 1 x LED PLATE 26,4 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging

1 Box 0,65 x 0,65 x 0,15 m
 Vol 0,063 m³
 Gross weight 3,13 Kg Net weight 2,5 Kg



1170



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 36/ _ _ Soft pink (NCS S 1010-Y50R)
- 40/ _ _ Blue L1 (NCS S 3010-B)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

- /1_ 2700 K - 4056,81 lm F
- /3_ 3500 K - 4243,6 lm G
- CRI >90

Control

- 1170 _ _ / _ _
-
- _ _ / _ _ A Push; 1-10V; DALI-2
- _ _ / _ _ Z Casambi

Materials

Body: Aluminum.

Light Source and electronics
 3 x LED 13,4 W 700 mA
 Constant Current 700 mA
 220-240V 50/60Hz

Packaging

1 Box 1 x 1 x 0,2 m
 Vol 0,02 m³
 Gross weight 7,7 Kg Net weight 5,3 Kg



Jazz

Design by Diego Fortunato

Undulating and fluid, Jazz's smooth silhouette is strikingly organic. The gently curved design imparts a playful presence, like an oversized chess piece standing guard.


Floor



1329

Ø 25 x 190 cm

1329



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
45 Blue D1
(NCS S 7010-B10G)

Materials

Body: PU- Polyurethane.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 37,2W 1050 mA
Constant Current 1050 mA
100~240Vac 50/60Hz

LED Colour Temperature

/1_ 2700 K - 3736 lm



CRI >90

Control

1329 __ / __

__ / 15 Push

__ / 1Z Casambi

__ / 1Y ProtoPixel*

Packaging

2 Boxes
Total Vol 0,1880 m³
Gross weight 19,8 Kg Net weight 15 Kg

Notes

1329 __ / 15: Push **Bi-volt**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Dimmer on the cable. Electric cable 2,5 m.





Flamingo

Design by Antoni Arola

Displaying the elegant poise of the bird that inspired it, Flamingo projects a feeling of weightlessness hovering overhead. The deconstructed design separates the LED light source from its translucent shades, producing gradations of diffuse illumination.

Pendant

1510

Ø 70 cm



1527

Ø 90 cm



1530

Ø 90 cm



1540

Ø 70 cm



1550

Ø 90 cm



1560

Ø 90 cm




1570

Ø 90 cm



1510



Finishes

18/ __ Graphite
(RAL 7016)
20/ __ Gold
(Gold)
67/ __ Copper
(Copper)
93/ __ White
(RAL 9016)

LED Colour Temperature

/1_ 2700 K - 1108,02 lm
/3_ 3500 K - 1278,8 lm
F
CRI >90

Control

1510 __ / __
__ / _1 DALI-2
__ / _B Push; 1-10V
__ / _Z Casambi

Materials

Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics

2 x LED 5,6 W 500 mA
Constant Current 500 mA
110-240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,1320 m³
Gross weight 8,7 Kg Net weight 7,8 Kg

Notes

1510 __ / _1: DALI-2 **Bi-volt**
1510 __ / _B: Push; 1-10V **Bi-volt**
Extra cable length.



1527



Finishes

18/ __ Graphite
(RAL 7016)
20/ __ Gold
(Gold)
67/ __ Copper
(Copper)
93/ __ White
(RAL 9016)

LED Colour Temperature

/1_ 2700 K - 1108,02 lm
/3_ 3500 K - 1278,8 lm
F
CRI >90

Control

1527 __ / __
__ / _1 DALI-2
__ / _B Push; 1-10V
__ / _Z Casambi

Materials

Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics

2 x LED 5,6 W 500 mA
Constant Current 500 mA
110-240V 50/60Hz

Packaging


1 Box 0,12 x 0,80 x 0,79 m
Vol 0,0634 m³
Gross weight 4,1 Kg Net weight 3,69 Kg

Notes

1527 __ / _1: DALI-2 **Bi-volt**
1527 __ / _B: Push; 1-10V **Bi-volt**
Extra cable length.



1530



Finishes

18/ __ Graphite
(RAL 7016)
20/ __ Gold
(Gold)
67/ __ Copper
(Copper)
93/ __ White
(RAL 9016)

LED Colour Temperature

/1_ 2700 K - 1662,03 lm
/3_ 3500 K - 1918,2 lm
F
CRI >90

Control

1530 __ / __
__ / _1 DALI-2
__ / _B Push; 1-10V
__ / _Z Casambi

Materials

Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics

3 x LED 5,6 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,1520 m³
Gross weight 10 Kg Net weight 7 Kg

Notes

Extra cable length.



1540



Finishes
18/ __ Graphite (RAL 7016)
20/ __ Gold (Gold)
67/ __ Copper (Copper)
93/ __ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 554,01 lm
/3 _ 3500 K - 639,4 lm
F
 CRI >90


Control
1540 __ / __
 __ / _ **1** DALI-2
 __ / _ **B** Push; 1-10V
 __ / _ **Z** Casambi

Materials
 Diffuser: PMMA.
 Body: Aluminum.
 Canopy and rods: Steel.


Packaging
 2 Boxes
 Total Vol 0,0620 m³
 Gross weight 6 Kg Net weight 4 Kg

Light Source and electronics
 1 x LED 5,6 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Notes
 1540 __ / _ 1: DALI-2 **Bi-volt**
 1540 __ / _ B: Push; 1-10V **Bi-volt**
 Extra cable length.



1550



Finishes
18/ __ Graphite (RAL 7016)
20/ __ Gold (Gold)
67/ __ Copper (Copper)
93/ __ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm
F
 CRI >90

Control
1550 __ / __
 __ / _ **1** DALI-2
 __ / _ **B** Push; 1-10V
 __ / _ **Z** Casambi

Materials
 Diffuser: PMMA.
 Body: Aluminum.
 Canopy and rods: Steel.


Packaging
 3 Boxes
 Total Vol 0,1520 m³
 Gross weight 11,3 Kg Net weight 8,8 Kg

Light Source and electronics
 3 x LED 5,6 W 500 mA
 Constant Current 500 mA
 220-240V 50/60Hz

Notes
 Extra cable length.



1560



Finishes
18/ __ Graphite (RAL 7016)
20/ __ Gold (Gold)
67/ __ Copper (Copper)
93/ __ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm
F
 CRI >90


Control
1560 __ / __
 __ / _ **1** DALI-2
 __ / _ **B** Push; 1-10V
 __ / _ **Z** Casambi

Materials
 Diffuser: PMMA.
 Body: Aluminum.
 Canopy and rods: Steel.


Packaging
 3 Boxes
 Total Vol 0,1860 m³
 Gross weight 12,7 Kg Net weight 10,2 Kg

Light Source and electronics
 3 x LED 5,6 W 500 mA
 Constant Current 500 mA
 220-240V 50/60Hz

Notes
 Extra cable length.



1570

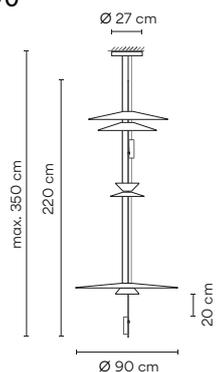

Finishes
18/ __ Graphite (RAL 7016)
20/ __ Gold (Gold)
67/ __ Copper (Copper)
93/ __ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 2216,04 lm
/3 _ 3500 K - 2557,6 lm
F
 CRI >90

Control
1570 __ / __
 __ / _ **1** DALI-2
 __ / _ **B** Push; 1-10V
 __ / _ **Z** Casambi

Materials
 Diffuser: PMMA. Shade: PMMA.
 Body: Aluminum. Canopy and rods: Steel.

Packaging
 2 Boxes
 Total Vol 0,1633 m³
 Gross weight 10 Kg Net weight 8,64 Kg

Light Source and electronics
 4 x LED 5,6 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Notes
 Extra cable length.





Flamingo Mini

Design by Antoni Arola

Flamingo Mini creates multi-layered silhouettes with an avant-garde, intriguing aesthetic. This hanging lamp recalls a bird hovering overhead, bringing an intimate ambience as it casts diffuse gradations of soothing light through its translucent diffuser.

Pendant

1590

Ø 45 cm

1575

Ø 45 cm

1580

Ø 9 cm

1585

Ø 45 cm

Option A

Option B

Option C



Three options of installation

1575

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 726 lm



CRI >90


Control

1575 _ _ / _ _


_ _ / 11 DALI-2

_ _ / 1B Push; 1-10V

_ _ / 1Z Casambi



Select Electrical connection



Surface

Built-in XS

_10 Surface
_23 Built-in XS

Materials

Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics

2 x LED 3W 175 mA
Constant current 350 mA
110-240Vac 50/60Hz

Packaging

2 Boxes
Box 1: 0,07 x 0,07 x 1,25 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0478 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes

1575 _ _ / 11: DALI-2 **Bi-volt**

1575 _ _ / 1B: Push; 1-10V **Bi-volt**

Additional cable length
personalisation




1580

Finishes
 11/ __ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1_ 2700 K - 726 lm
 E →
 CRI >90

Control
 1580 __ / __
 __ / 11 DALI-2
 __ / 1B Push; 1-10V
 __ / 1Z Casambi



⚡ Select Electrical connection



Surface Built-in XS

_10 Surface
 _23 Built-in XS

Materials

Diffuser: PMMA.
 Rods: Stainless steel.
 Body: Aluminum.
 Canopy: ABS.

Light Source and electronics

2 x LED 3W 175 mA
 Constant current 350 mA
 110-240Vac 50/60Hz

Packaging

2 Boxes
 Box 1: 0,068 x 0,068 x 1,25 m
 Box 2: 0,20 x 0,21 x 0,13 m
 Total Vol 0,0112 m³
 Gross weight 4 Kg Net weight 3 Kg

Notes

1580 __ / 11: DALI-2 **Bi-volt**
 1580 __ / 1B: Push; 1-10V **Bi-volt**
 Additional cable length
 personalisation




1585

Finishes
 11/ __ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1_ 2700 K - 726 lm
 E →
 CRI >90

Control
 1585 __ / __
 __ / 11 DALI-2
 __ / 1B Push; 1-10V
 __ / 1Z Casambi



⚡ Select Electrical connection



Surface Built-in XS

_10 Surface
 _23 Built-in XS

Materials

Diffuser: PMMA.
 Rods: Stainless steel.
 Body: Aluminum.
 Canopy: ABS.

Light Source and electronics


2 x LED 3W 175 mA
 Constant current 350 mA
 110-240Vac 50/60Hz

Packaging

2 Boxes
 Box 1: 0,07 x 0,07 x 1,25 m
 Box 2: 0,51 x 0,51 x 0,16 m
 Total Vol 0,0478 m³
 Gross weight 5,5 Kg Net weight 4 Kg

Notes

1585 __ / 11: DALI-2 **Bi-volt**
 1585 __ / 1B: Push; 1-10V **Bi-volt**
 Additional cable length
 personalisation




1590

Finishes
11/ __ Black
(NCS S 8500-N)

LED Colour Temperature
/1_ 2700 K - 1152 lm
E 
CRI >90

Control
1590 __ / __
__ / 11 DALI-2
__ / 1B Push; 1-10V
__ / 1Z Casambi



Select Electrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials
Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics
3 x LED COB 3W 185 mA
Constant Current 550 mA
110-240Vac 50/60Hz

Packaging
2 Boxes
Box 1: 0,07 x 0,07 x 1,60 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0494 m³
Gross weight 6,5 Kg Net weight 5 Kg

Notes
1590 __ / 11: DALI-2 **Bi-volt**
1590 __ / 1B: Push; 1-10V **Bi-volt**
Additional cable length
personalisation



Select Electrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

_23
Built-in XS



Ø 8 cm
height 6 cm
black finish.


Regular ceiling

_10
Surface



Ø 16 cm
black finish.

Built-in





Pin

Design by Ichiro Iwasaki

A timeless proposal from Japanese designer Ichiro Iwasaki, the Pin is both classic and contemporary. Characterised by a graceful stem and subtle, functional expression, it is small in scale but with exceptional lighting efficiency.

Table




1650
23 x 55 cm



1655
40 x 55 cm

1650



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

LED Colour Temperature

/1_ 2700 K - 485 lm
E 
CRI >90

Control

1650 _ _ / 10 On/ Off

Packaging

1 Box 0,174 x 0,212 x 0,713 m
Vol 0,0212 m³
Gross weight 2,94 Kg Net weight 2 Kg

Notes


Switch on the base. Electric cable 3 m



1160	10	/1A
Model	Finish	Control
LED Colour Temperature		

1655



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

LED Colour Temperature

/1 _ 2700 K - 485 lm

CRI >90

Control

1655 _ _ / 10 On/ Off

Packaging

1 Box 0,20 x 0,357 x 0,67 m
Vol 0,0480 m³
Gross weight 3,68 Kg Net weight 2,2 Kg

Notes

Switch on the base. Electric cable 3 m

Floor




1660

25 x 125 cm

1670

35 x 143 cm

1660



Finishes
11/ _ _ Black
 (NCS S 8500-N)
23/ _ _ Warm White
 (NCS S 0502-Y50R)
58/ _ _ Cream
 (NCS S 2005-Y20R)
62/ _ _ Green
 (NCS S 3010-G20Y)
 Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

LED Colour Temperature
/1_ 2700 K - 485 lm

 CRI >90

Control
1660 _ _ / 10 On/ Off

Materials
 Head: Aluminum. Base: Zinc Alloy.
 Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
 1 x LED 4,5 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz


Packaging
 1 Box 0,149 x 0,265 x 0,33 m
 Vol 0,1310 m³
 Gross weight 7,45 Kg Net weight 3,8 Kg

Notes
 Switch on the cable. Electric cable 3 m





1670

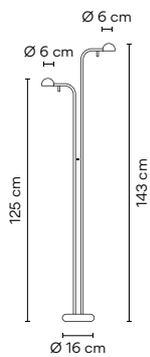

Finishes

- 11/** __ Black
(NCS S 8500-N)
- 23/** __ Warm White
(NCS S 0502-Y50R)
- 58/** __ Cream
(NCS S 2005-Y20R)
- 62/** __ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rods: Steel.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

LED Colour Temperature

/1 _ 2700 K - 970 lm
E →
CRI >90

Control

1670 __ / 10 On/ Off

Packaging

1 Box 1,496 x 0,265 x 0,33 m
Vol 0,1310 m³
Gross weight 8,25 Kg Net weight 4,6 Kg

Notes

Switch on the cable. Electric cable 3 m



Wall



∅ 10 cm
1675 62



∅ 10 cm
1675 11



∅ 10 cm
1675 58



∅ 10 cm
1675 23



25 x 39 cm
1680



30 x 70 x 8 cm
1685




30 x 70 x 8 cm
1686



∅ 10 x 40 x 8 cm
1690




∅ 10 x 70 x 8 cm
1692

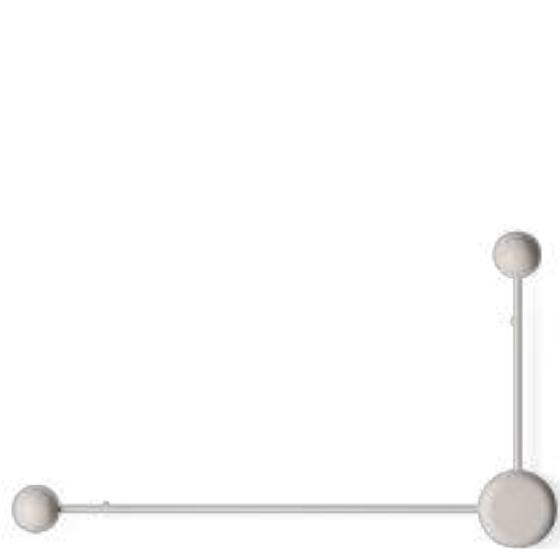

70 x 40 x 8 cm
1694

1675



Finishes

- 11/ __ Black
(NCS S 8500-N)
- 23/ __ Warm White
(NCS S 0502-Y50R)
- 58/ __ Cream
(NCS S 2005-Y20R)
- 62/ __ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1_ 2700 K - 485 lm
-
- CRI >90

Control

1675 __ / 10 On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging


1 Box 0,193 x 0,148 x 0,161 m
Vol 0,0046 m³
Gross weight 0,85 Kg Net weight 0,6 Kg

Notes

Switch on the wall plate



1680



Finishes

- 11/ __ Black
(NCS S 8500-N)
- 23/ __ Warm White
(NCS S 0502-Y50R)
- 58/ __ Cream
(NCS S 2005-Y20R)
- 62/ __ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1_ 2700 K - 485 lm
-
- CRI >90

Control

1680 __ / 10 On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging


1 Box 0,146 x 0,355 x 0,473 m
Vol 0,0250 m³
Gross weight 1,745 Kg Net weight 1 Kg

Notes

Switch on the wall plate



1685



Finishes

- 11/ __ Black
(NCS S 8500-N)
- 23/ __ Warm White
(NCS S 0502-Y50R)
- 58/ __ Cream
(NCS S 2005-Y20R)
- 62/ __ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1_ 2700 K - 970 lm
-
- CRI >90

Control

1685 __ / 10 On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging


1 Box 0,177 x 0,445 x 0,792 m
Vol 0,0620 m³
Gross weight 2,64 Kg Net weight 1,2 Kg

Notes

Switch on the wall plate



1686



Finishes
11/ _ _ Black
 (NCS S 8500-N)
23/ _ _ Warm White
 (NCS S 0502-Y50R)
58/ _ _ Cream
 (NCS S 2005-Y20R)
62/ _ _ Green
 (NCS S 3010-G20Y)

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

Materials
 Head: Aluminum. Base: Zinc Alloy.
 Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
 2 x LED 4,5 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz


LED Colour Temperature
/1 _ 2700 K - 970 lm

 CRI >90


Control
1686 _ _ / 10 On/ Off

Packaging
 1 Box 0,177 x 0,445 x 0,792 m
 Vol 0,0620 m³
 Gross weight 2,64 Kg Net weight 1,2 Kg

Notes
 Switch on the wall plate



1690



Finishes
11/ _ _ Black
 (NCS S 8500-N)
23/ _ _ Warm White
 (NCS S 0502-Y50R)
58/ _ _ Cream
 (NCS S 2005-Y20R)
62/ _ _ Green
 (NCS S 3010-G20Y)

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

Materials
 Head: Aluminum. Base: Zinc Alloy.
 Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
 1 x LED 4,5 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

LED Colour Temperature
/1 _ 2700 K - 485 lm


 CRI >90

Control
1690 _ _ / 10 On/ Off

Packaging
 1 Box 0,146 x 0,355 x 0,473 m
 Vol 0,0250 m³
 Gross weight 1,545 Kg Net weight 0,8 Kg



1692



Finishes

11/ __ Black
(NCS S 8500-N)
23/ __ Warm White
(NCS S 0502-Y50R)
58/ __ Cream
(NCS S 2005-Y20R)
62/ __ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 485 lm
E →
CRI >90

Control

1692 __ / 10 On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics


1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,177 x 0,445 x 0,792 m
Vol 0,620 m³
Gross weight 2,44 Kg Net weight 1 Kg



1694



Finishes

11/ __ Black
(NCS S 8500-N)
23/ __ Warm White
(NCS S 0502-Y50R)
58/ __ Cream
(NCS S 2005-Y20R)
62/ __ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 970 lm
E →
CRI >90

Control

1694 __ / 10 On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,177 x 0,445 x 0,792 m
Vol 0,620 m³
Gross weight 2,84 Kg Net weight 1,4 Kg



Offset

Design by Xuclà

Offset combines intuitive lighting with an industrial, geometric silhouette. A complementary system of superficial ceiling, wall and floor fixtures, the collection integrates five lighting effects with advanced colour and temperature regulation for a carefully curated atmosphere.

Ceiling - Accent Downlight



1720

15 x 4 x 7 cm



1722

25 x 4 x 7 cm



1725

15 x 15 x 7 cm



1727

15 x 15 x 7 cm

1720
UGR <20

Finishes

- **11/ _ _ Black**
(NCS S 8500-N)
- **23/ _ _ Warm White**
(NCS S 0502-Y50R)
- **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

- /1_ 2700 K - 451 lm
- /2_ 3000 K - 471 lm
- /3_ 3500 K - 489 lm




CRI >90

Control

1720 _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ 5 Push
- _ _ / _ Y ProtoPixel*
- _ _ / _ Z Casambi



Materials

Body: Aluminum.

Light Source and electronics


1 x LED 2,9 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging


1 Box 0,10 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 1 Kg Net weight 0,4 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1722



- Finishes**
- **11/ _ _ Black**
(NCS S 8500-N)
 - **23/ _ _ Warm White**
(NCS S 0502-Y50R)
 - **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

/1_ 2700 K - 1353 lm
/2_ 3000 K - 1413 lm
/3_ 3500 K - 1467 lm

E →

CRI >90

Control

1722 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Y** ProtoPixel*
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

3 x LED 2,9 W 250 mA
Constant Current 250 mA
220-240V 50/60Hz

Packaging


1 Box 0,10 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 1,1 Kg Net weight 0,6 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1725



- Finishes**
- **11/ _ _ Black**
(NCS S 8500-N)
 - **23/ _ _ Warm White**
(NCS S 0502-Y50R)
 - **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

/1_ 2700 K - 902 lm
/2_ 3000 K - 942 lm
/3_ 3500 K - 978 lm

E →

CRI >90

Control

1725 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Y** ProtoPixel*
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant Current 250 mA
220-240V 50/60Hz

Packaging


1 Box 0,20 x 0,21 x 0,13 m
Vol 0,005 m³
Gross weight 1,2 Kg Net weight 0,6 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1727



- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **23/** _ _ Warm White
(NCS S 0502-Y50R)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 902 lm
- /2** _ 3000 K - 942 lm
- /3** _ 3500 K - 978 lm

E →

CRI >90

Control

1727 _ _ / _ _

_ _ / _ **1** DALI-2

_ _ / _ **5** Push

_ _ / _ **Y** ProtoPixel*

_ _ / _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant Current 250 mA
220-240V 50/60Hz

Packaging

1 Box 0,20 x 0,21 x 0,13 m
Vol 0,005 m³
Gross weight 1,2 Kg Net weight 0,6 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



Ceiling - High Comfort Diffuser



1728
40 x 4 x 7 cm



1730
65 x 4 x 7 cm



1735
100 x 4 x 7 cm




1740
31 x 15 x 7 cm



1745
31 x 15 x 7 cm

1728 UGR <21



- Finishes**
- **11/ _ _ Black**
(NCS S 8500-N)
 - **23/ _ _ Warm White**
(NCS S 0502-Y50R)
 - **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1_ 2700 K - 1674 lm
 - /2_ 3000 K - 1733 lm
 - /3_ 3500 K - 1791 lm



- Tunable White**
- /8_ (2200 K - 4000 K)
921 lm - 1075 lm



CRI >90

Control

1728 _ / _

- _ / _ **1** DALI-2
- _ / _ **5** Push
- _ / _ **Y** ProtoPixel*
- _ / _ **Z** Casambi

- _ / **81** Tunable White + DALI-2 DT8
- _ / **8Y** Tunable White + ProtoPixel*
- _ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220-240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220-240V 50/60Hz

Packaging


1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m³
Gross weight 1,6 Kg Net weight 0,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1730
UGR <24



- | | |
|--|--|
| <p>Finishes</p> <ul style="list-style-type: none"> ● 11/ _ _ Black
(NCS S 8500-N) ● 23/ _ _ Warm White
(NCS S 0502-Y50R) ● 24/ _ _ Beige M1
(NCS S 2005-Y50R) | <p>LED Colour Temperature</p> <p>Static White</p> <ul style="list-style-type: none"> /1 _ 2700 K - 3348 lm /2 _ 3000 K - 3466 lm /3 _ 3500 K - 3582 lm <p>Tunable White</p> <ul style="list-style-type: none"> /8 _ (2200 K - 4000 K)
1842 lm - 2150 lm <p>CRI >90</p> |
|--|--|

- Control**
- 1730 _ _ / _ _**
-
- _ _ / _ 1 DALI-2
 - _ _ / _ 5 Push
 - _ _ / _ Y ProtoPixel*
 - _ _ / _ Z Casambi
-
- _ _ / 81 Tunable White + DALI-2 DT8
 - _ _ / 8Y Tunable White + ProtoPixel*
 - _ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4W 650mA
Constant Current 650 mA
220-240V 50/60Hz

Tunable White:
1 x LED STRIP 20,8W
Constant Voltage 24 VDC
220-240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m³
Gross weight 2,1 Kg Net weight 1,4 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1735

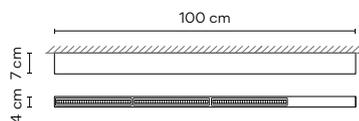

- | | |
|--|--|
| <p>Finishes</p> <ul style="list-style-type: none"> ● 11/ _ _ Black
(NCS S 8500-N) ● 23/ _ _ Warm White
(NCS S 0502-Y50R) ● 24/ _ _ Beige M1
(NCS S 2005-Y50R) | <p>LED Colour Temperature</p> <p>Static White</p> <ul style="list-style-type: none"> /1 _ 2700 K - 5022 lm /2 _ 3000 K - 5199 lm /3 _ 3500 K - 5373 lm <p>Tunable White</p> <ul style="list-style-type: none"> /8 _ (2200 K - 4000 K)
2763 lm - 3225 lm <p>CRI >90</p> |
|--|--|

- Control**
- 1735 _ _ / _ _**
-
- _ _ / _ 1 DALI-2
 - _ _ / _ 5 Push
 - _ _ / _ Y ProtoPixel*
 - _ _ / _ Z Casambi
-
- _ _ / 81 Tunable White + DALI-2 DT8
 - _ _ / 8Y Tunable White + ProtoPixel*
 - _ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 41,1 W 650 mA
Constant Current 650 mA
220-240V 50/60Hz

Tunable White:
1 x LED STRIP 31,2 W
Constant Voltage 24 VDC
220-240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m³
Gross weight 2,9 Kg Net weight 1,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1740
UGR <21



- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **23/** __ Warm White
(NCS S 0502-Y50R)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1 _ 2700 K - 1674 lm
- /2 _ 3000 K - 1733 lm
- /3 _ 3500 K - 1791 lm

Tunable White

- /8 _ (2200 K - 4000 K)
921 lm - 1075 lm



F >90

Control

1740 __ / __

- __ / _ 1 DALI-2
- __ / _ 5 Push
- __ / _ Y ProtoPixel*
- __ / _ Z Casambi

- __ / **81** Tunable White + DALI-2 DT8
- __ / **8Y** Tunable White + ProtoPixel*
- __ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging


1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m³
Gross weight 1,6 Kg Net weight 0,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1745
UGR <21



- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **23/** __ Warm White
(NCS S 0502-Y50R)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1 _ 2700 K - 1674 lm
- /2 _ 3000 K - 1733 lm
- /3 _ 3500 K - 1791 lm

Tunable White

- /8 _ (2200 K - 4000 K)
921 lm - 1075 lm



F >90

Control

1745 __ / __

- __ / _ 1 DALI-2
- __ / _ 5 Push
- __ / _ Y ProtoPixel*
- __ / _ Z Casambi

- __ / **81** Tunable White + DALI-2 DT8
- __ / **8Y** Tunable White + ProtoPixel*
- __ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m³
Gross weight 1,6 Kg Net weight 0,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).




Ceiling - Linear High Efficiency Low Glare



1729
40 x 4 x 7 cm



1732
65 x 4 x 7 cm

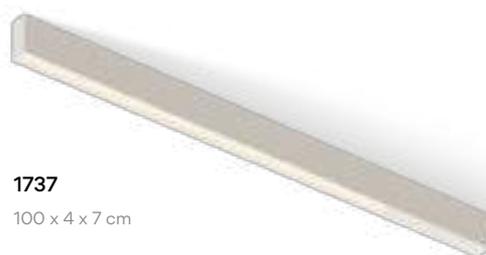

1737
100 x 4 x 7 cm




1742
32 x 15 x 7 cm



1747
31 x 15 x 7 cm

1729
UGR <18



- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **23/** _ _ Warm White
(NCS S 0502-Y50R)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1_ 2700 K - 3348 lm
 - /2_ 3000 K - 3466 lm
 - /3_ 3500 K - 3582 lm



- Tunable White**
- /8_ (2200 K - 4000 K)
1842 lm - 2150 lm



CRI >90

Control

1729 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ 5 Push
- _ _ / _ Y ProtoPixel*
- _ _ / _ Z Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8Y** Tunable White + ProtoPixel*
- _ _ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz


Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging


1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m³
Gross weight 1,6 Kg Net weight 0,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

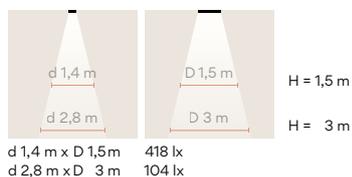

1732
UGR <20



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1_ 2700 K - 3348 lm
 - /2_ 3000 K - 3466 lm
 - /3_ 3500 K - 3582 lm



- Tunable White**
- /8_ (2200 K - 4000 K)
1842 lm - 2150 lm



CRI >90

Control

1732 _ _ / _ _

- _ _ / _ 1 DALI-2
 - _ _ / _ 5 Push
 - _ _ / _ Y ProtoPixel*
 - _ _ / _ Z Casambi
-
- _ _ / **81** Tunable White + DALI-2 DT8
 - _ _ / **8Y** Tunable White + ProtoPixel*
 - _ _ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220-240V 50/60Hz



Tunable White:
1 x LED STRIP 20,8 W
Constant Voltage 24 VDC
220-240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m³
Gross weight 2,1 Kg Net weight 1,4 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

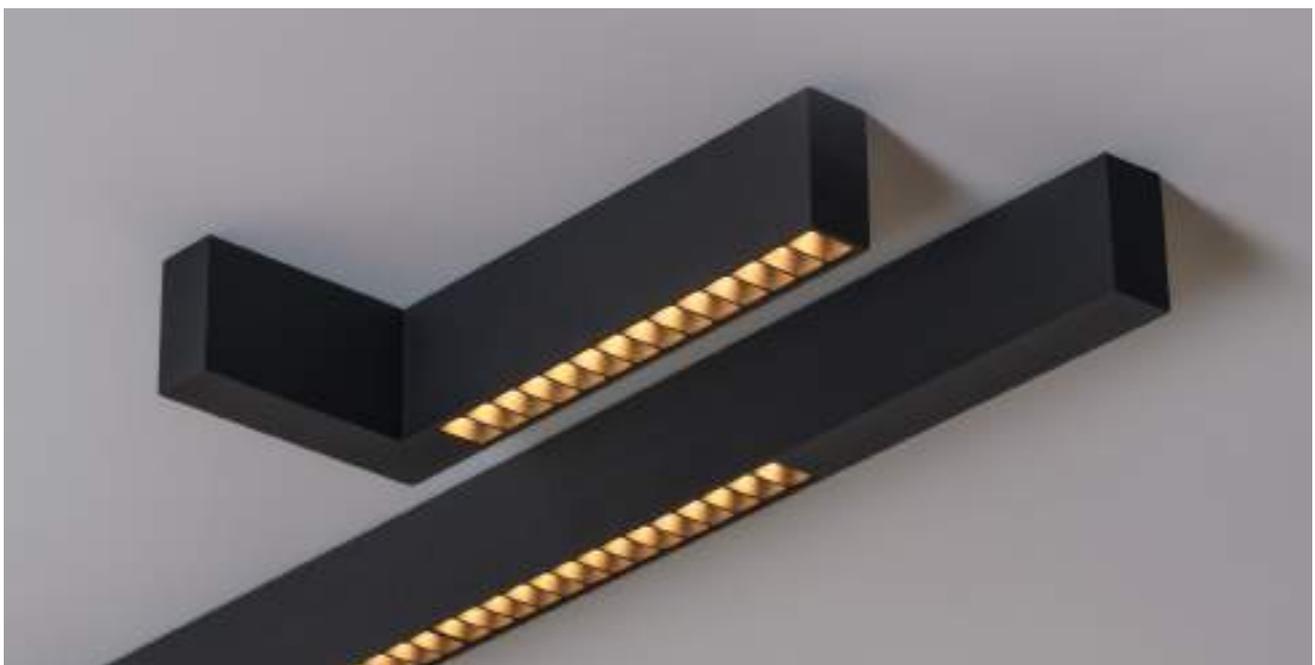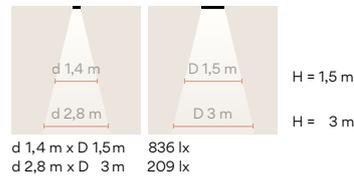

1737
UGR <20



- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **23/** __ Warm White
(NCS S 0502-Y50R)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5022 lm
/2 _ 3000 K - 5199 lm
/3 _ 3500 K - 5373 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
2763 lm - 3225 lm
F

CRI >90

Control
1737 __ / __

__ / _1 DALI-2
__ / _5 Push
__ / _Y ProtoPixel*
__ / _Z Casambi

__ / **81** Tunable White + DALI-2 DT8
__ / **8Y** Tunable White + ProtoPixel*
__ / **8Z** Tunable White + Casambi

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED STRIP 41,1 W 650 mA
Constant Current 650 mA
220-240V 50/60Hz


Tunable White:
1 x LED STRIP 31,2 W
Constant Voltage 24 VDC
220-240V 50/60Hz

Packaging
1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m³
Gross weight 2,9 Kg Net weight 1,8 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1742



Finishes

- **11/ _ _ Black**
(NCS S 8500-N)
- **23/ _ _ Warm White**
(NCS S 0502-Y50R)
- **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 1674 lm
 - /2 _ 3000 K - 1733 lm
 - /3 _ 3500 K - 1791 lm



- Tunable White**
- /8 _ (2200 K - 4000 K)
921 lm - 1075 lm



CRI >90

Control

1742 _ _ / _ _

- _ _ / _ 1 DALI-2
 - _ _ / _ 5 Push
 - _ _ / _ Y ProtoPixel*
 - _ _ / _ Z Casambi
-
- _ _ / **81** Tunable White + DALI-2 DT8
 - _ _ / **8Y** Tunable White + ProtoPixel*
 - _ _ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz



Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging


1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m³
Gross weight 1,6 Kg Net weight 0,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

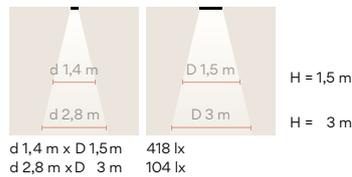

1747



- Finishes**
- **11/ _ _ Black**
(NCS S 8500-N)
 - **23/ _ _ Warm White**
(NCS S 0502-Y50R)
 - **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

- LED Colour Temperature**
- Static White**
- /1 _ 2700 K - 1674 lm
 - /2 _ 3000 K - 1733 lm
 - /3 _ 3500 K - 1791 lm
- Tunable White**
- /8 _ (2200 K - 4000 K)
921 lm - 1075 lm
- CRI >90

- Control**
- 1747 _ _ / _ _**
-
- _ _ / _ 1 DALI-2
 - _ _ / _ 5 Push
 - _ _ / _ Y ProtoPixel*
 - _ _ / _ Z Casambi
-
- _ _ / 81 Tunable White + DALI-2 DT8
 - _ _ / 8Y Tunable White + ProtoPixel*
 - _ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220-240V 50/60Hz


Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220-240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m³
Gross weight 1,6 Kg Net weight 0,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

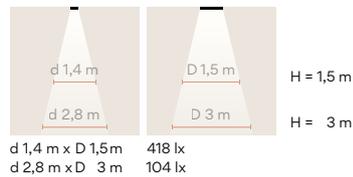

Ceiling - Flat Diffuser




1755
125 x 4 x 7 cm



1757
225 x 4 x 7 cm

1755

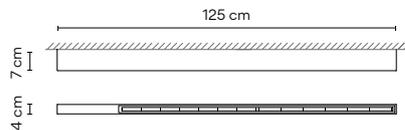

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **23/** __ Warm White
(NCS S 0502-Y50R)
- **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1** 2700 K - 2544 lm
 - /2** 3000 K - 2628 lm
 - /3** 3500 K - 2712 lm
- Tunable White**
- /8** (2200 K - 4000 K)
1751,96 lm - 2395,6 lm
- E** >
- F** >
- CRI >90

Control

- 1755** __ / __
-
- __ / **1** DALI-2
 - __ / **5** Push
 - __ / **Y** ProtoPixel*
 - __ / **Z** Casambi
-
- __ / **81** Tunable White + DALI-2 DT8
 - __ / **8Y** Tunable White + ProtoPixel*
 - __ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED STRIP 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:

1 x LED STRIP 20,6 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging


1 Box 0,1 x 0,106 x 1,5 m
Vol 0,016 m³
Gross weight 3,5 Kg Net weight 2,1 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1757

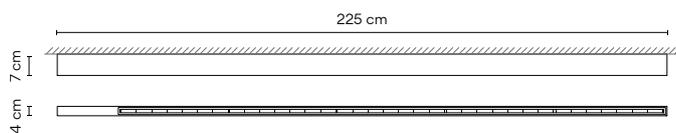

<p>Finishes</p> <ul style="list-style-type: none"> ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) 	<p>LED Colour Temperature</p> <p>Static White</p> <ul style="list-style-type: none"> /1 _ 2700 K - 5088 lm /2 _ 3000 K - 5256 lm /3 _ 3500 K - 5424 lm <p>Tunable White</p> <ul style="list-style-type: none"> /8 _ (2200 K - 4000 K) 3503,92 lm - 4791,2 lm <p>Control</p> <p>1757 _ _ / _ _</p> <hr/> <ul style="list-style-type: none"> _ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Y ProtoPixel* _ _ / _ Z Casambi <hr/> <ul style="list-style-type: none"> _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8Y Tunable White + ProtoPixel* _ _ / 8Z Tunable White + Casambi
--	--

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 41,2 W 650 mA
Constant Current 650 mA
220-240V 50/60Hz


Tunable White:
1 x LED STRIP 41,3 W
Constant Voltage 24 VDC
220-240V 50/60Hz

Packaging

1 Box 0,1 x 0,106 x 2,3 m
Vol 0,024 m³
Gross weight 6,0 Kg Net weight 3,5 Kg

Notes


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



Ceiling Wall - Colour Mood Grazer



1760 Right

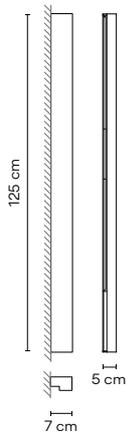

Finishes

- 11/ __ Black (NCS S 8500-N)
- 23/ __ Warm White (NCS S 0502-Y50R)
- 24/ __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /A _ Infinite Colour (TW + RGB) 1572 lm - 1940 lm
- 70 lm (RED)
- 182 lm (GREEN)
- 35 lm (BLUE)



CRI >90

Control

1760 __ / _ Y ProtoPixel*

Materials

Diffuser: PC- Polycarbonate.
Lens: PMMA.

Light Source and electronics

1 x LED STRIP 17,2W
Constant Voltage 24VDC
220-240V 50/60Hz

Packaging


1 Box 0,117 x 0,125 x 1,3 m
Vol 0,020 m³
Gross weight 4,0 Kg Net weight 2,6 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1762 Left

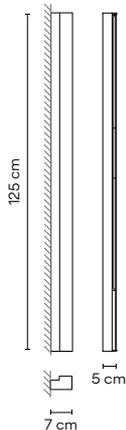

Finishes

- 11/ __ Black (NCS S 8500-N)
- 23/ __ Warm White (NCS S 0502-Y50R)
- 24/ __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /A _ Infinite Colour (TW + RGB) 1572 lm - 1940 lm
- 70 lm (RED)
- 182 lm (GREEN)
- 35 lm (BLUE)



CRI >90

Control

1762 __ / _ Y ProtoPixel*

Materials

Diffuser: PC- Polycarbonate.
Lens: PMMA.

Light Source and electronics


1 x LED STRIP 17,2 W
Constant Voltage 24 VDC
110-240V 50/60Hz

Packaging


1 Box 0,117 x 0,125 x 1,3 m
Vol 0,020 m³
Gross weight 4,0 Kg Net weight 2,6 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1765
Right

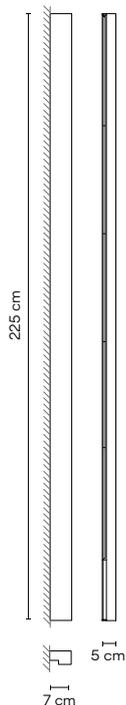

<p>Finishes</p> <ul style="list-style-type: none"> ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) 	<p>LED Colour Temperature</p> <p>/A _ Infinite Colour (TW + RGB) 3880 lm - 3144 lm</p> <p>140 lm (RED) 364 lm (GREEN) 70 lm (BLUE)</p> <p>E </p> <p>CRI >90</p>
--	---


Control
1765 _ _ / _ Y ProtoPixel*

Materials
Diffuser: PC- Polycarbonate.
Lens: PMMA.


Light Source and electronics
1 x LED STRIP 35,4 W
Constant Voltage 24 VDC
110-240V 50/60Hz

Packaging
1 Box 0,1 x 0,106 x 2,3 m
Vol 0,024 m³
Gross weight 7,5 Kg Net weight 5,0 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



1767
Left

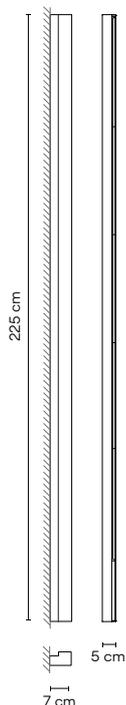

<p>Finishes</p> <ul style="list-style-type: none"> ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) 	<p>LED Colour Temperature</p> <p>/A _ Infinite Colour (TW + RGB) 3880 lm - 3144 lm</p> <p>140 lm (RED) 364 lm (GREEN) 70 lm (BLUE)</p> <p>E </p> <p>CRI >90</p>
--	---


Control
1767 _ _ / _ Y ProtoPixel*

Materials
Diffuser: PC- Polycarbonate.
Lens: PMMA.

Light Source and electronics
1 x LED STRIP 35,4 W
Constant Voltage 24 VDC
220-240V 50/60Hz

Packaging
1 Box 0,1 x 0,106 x 2,3 m
Vol 0,024 m³
Gross weight 7,5 Kg Net weight 5,0 Kg


Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



Wall - Up&Down Surface Grazer



1770



- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **23/** __ Warm White
(NCS S 0502-Y50R)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm

E >

CRI >90

Control

1770 __ / __

- __ / _ **0** On/ Off
- __ / _ **1** DALI-2 (Remote)
- __ / _ **5** Push (Remote)
- __ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics


2 x LED 2,9 W 250 mA
Constant current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,15 x 0,095 x 0,09 m
Vol 0,0013 m³
Gross weight 0,7 Kg Net weight 0,3 Kg

LED IP20 CE UK ENEC

1772



Finishes
 ● **11/** _ _ Black
 (NCS S 8500-N)
 ● **23/** _ _ Warm White
 (NCS S 0502-Y50R)
 ● **24/** _ _ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
 /1 _ 2700 K - 451 lm
 /2 _ 3000 K - 471 lm
 /3 _ 3500 K - 489 lm

Control
1772 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 5 Push
 _ _ / _ Z Casambi


Materials
 Body: Aluminum.
 Lens: PMMA.

Light Source and electronics
 2 x LED 2,9 W 250 mA
 Constant current 250 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,15 x 0,08 x 1,095 m
 Vol 0,0091 m³
 Gross weight 2,6 Kg Net weight 1,5 Kg



1774



Finishes
 ● **11/** _ _ Black
 (NCS S 8500-N)
 ● **23/** _ _ Warm White
 (NCS S 0502-Y50R)
 ● **24/** _ _ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
 /1 _ 2700 K - 451 lm
 /2 _ 3000 K - 471 lm
 /3 _ 3500 K - 489 lm

Control
1774 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 5 Push
 _ _ / _ Z Casambi

Materials
 Body: Aluminum.
 Lens: PMMA.

Light Source and electronics
 2 x LED 2,9 W 250 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,117 x 0,125 x 2 m
 Vol 0,029 m³
 Gross weight 4,1 Kg Net weight 2,3 Kg



Floor



1780
14 x 218 cm




1780
14 x 218 cm



1780
14 x 218 cm

1780



Finishes

- **11/ _ _ Black**
(NCS S 8500-N)
- **23/ _ _ Warm White**
(NCS S 0502-Y50R)
- **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

- /A _ Infinite Colour (TW + RGB)**
3880 lm - 3144 lm
- 140 lm (RED)
- 364 lm (GREEN)
- 70 lm (BLUE)
- E** →
- CRI >90

Control

- 1780 _ _ / _ Y ProtoPixel***
(also with push buttons)

Materials

Body: Aluminum.

Light Source and electronics

1 x LED STRIP 35,4 W
Constant Voltage 24 VDC
220-240V 50/60Hz

Packaging

1 Box 0,60 x 0,68 x 2,2 m
Vol 0,9 m³
Gross weight 7,0 Kg Net weight 4,3 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20 CE ENEC EAC Dimmer

Array

Design by Umut Yamac

A striking pendant of impressive proportions, Array is an exploration of thread and its potential to create lightweight and dynamic sculptures of light.

Pendant

Height 70 cm



Ø 37 cm

1800



Ø 54,5 cm

1815

Height 110 cm



Ø 37 cm

1805




Ø 54,5 cm

1820



Ø 82,5 cm

1830



Ø 124 cm

1840

Height 190 cm



Ø 37 cm

1810



Ø 54,5 cm

1825



Ø 82,5 cm

1835



Ø 124 cm

1845

Height 70 cm



Ø 54,5 cm

1850

Height 110 cm



Ø 54,5 cm

1855



Ø 82,5 cm

1865



Ø 124 cm

1875

Height 190 cm



Ø 54,5 cm

1860



Ø 82,5 cm


1870



Ø 124 cm

1880

1800



- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
/1 _ 2700 K - 2662 lm
D
CRI >90

Control

1800 _ _ / _ _
_ _ / 13 1-10V
_ _ / 1D Push; DALI-2
_ _ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Select Electrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 22W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7 Kg Net weight 4,8 Kg

Notes

1800 _ _ / _ 13: 1-10V **Multi-volt**
Extra cable length.



1805



- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 2662 lm
D
CRI >90

Control

1805 _ _ / _ _
_ _ / 13 1-10V
_ _ / 1D Push; DALI-2
_ _ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Select Electrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 22W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,3 Kg Net weight 5,1 Kg

Notes

1805 _ _ / _ 13: 1-10V **Multi-volt**
Extra cable length.



1810



- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1 _ 2700 K - 2662 lm
 D →
 CRI >90

Control

1810 _ _ / _ _
 _ _ / 13 1-10V
 _ _ / 1D Push; DALI-2
 _ _ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote
 Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 22W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
 Vol 0,0461 m³
 Gross weight 7,6 Kg Net weight 5,4 Kg

Notes

1810 _ _ / _ 13: 1-10V **Multi-volt**
 Extra cable length.



1815



- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1 _ 2700 K - 3993 lm
 D →
 CRI >90

Control

1815 _ _ / _ _
 _ _ / 13 1-10V
 _ _ / 1D Push; DALI-2
 _ _ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote
 Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics


1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
 Vol 0,0461 m³
 Gross weight 8,4 Kg Net weight 6,2 Kg

Notes

1815 _ _ / _ 13: 1-10V **Multi-volt**
 Extra cable length.



1820

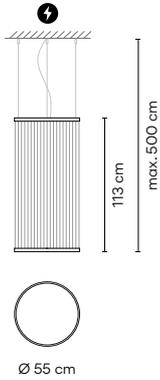

- Finishes (threads)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
/1 _ 2700 K - 3993 lm
D →
CRI >90

Control

1820 __ / __
__ / 13 1-10V
__ / 1D Push; DALI-2
__ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



__10 Surface
__24 Built-in S
__31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,8 Kg Net weight 6,6 Kg

Notes
1820 __ / _ 13: 1-10V **Multi-volt**
Extra cable length.



1825

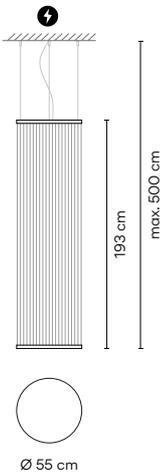

- Finishes (threads)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 3993 lm
D →
CRI >90

Control

1825 __ / __
__ / 13 1-10V
__ / 1D Push; DALI-2
__ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



__10 Surface
__24 Built-in S
__31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 9,2 Kg Net weight 7 Kg

Notes
1825 __ / _ 13: 1-10V **Multi-volt**
Extra cable length.



1830

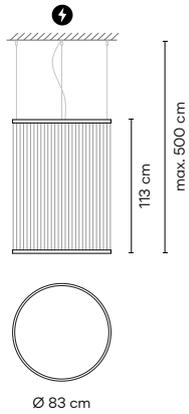

- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1_ 2700 K - 6050 lm
 ID →
 CRI >90

Control

1830 _ _ / _ _
 _ _ / 13 1-10V
 _ _ / 1D Push; DALI-2
 _ _ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics
 1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

Packaging


1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 13,5 Kg Net weight 9,5 Kg

Notes

1830 _ _ / _ 13: 1-10V **Multi-volt**
 Extra cable length.



1835

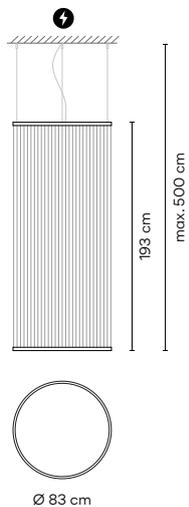

- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 6050 lm
 ID →
 CRI >90

Control

1835 _ _ / _ _
 _ _ / 13 1-10V
 _ _ / 1D Push; DALI-2
 _ _ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.


Light Source and electronics
 1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

Packaging


1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 14,1 Kg Net weight 10,1 Kg

Notes

1835 _ _ / _ 13: 1-10V **Multi-volt**
 Extra cable length.



1840

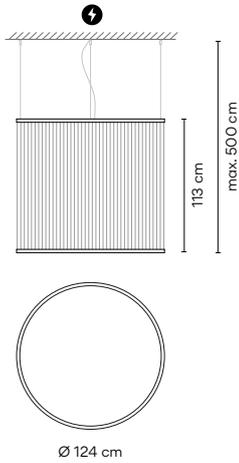

- Finishes (threads)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9196 lm
D
CRI >90

Control

1840 _ _ / _ _

- _ _ / 13 1-10V
- _ _ / 1D Push; DALI-2
- _ _ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



Surface Built-in S Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19 Kg Net weight 13 Kg


Notes

1840 _ _ / _ 13: 1-10V **Multi-volt**

Extra cable length.



1845

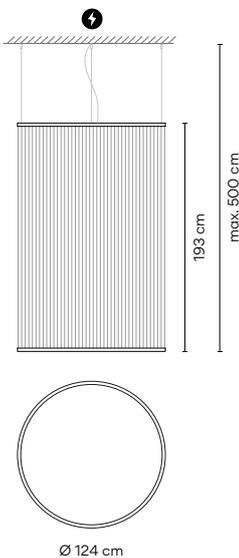

- Finishes (threads)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9196 lm
D
CRI >90

Control

1845 _ _ / _ _

- _ _ / 13 1-10V
- _ _ / 1D Push; DALI-2
- _ _ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



Surface Built-in S Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19,9 Kg Net weight 13,9 Kg


Notes

1845 _ _ / _ 13: 1-10V **Multi-volt**

Extra cable length.



1850



- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1 _ 2700 K - 3993 lm
 D →
 CRI >90

Control

1850 __ / __
 __ / 13 1-10V
 __ / 1D Push; DALI-2
 __ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote
 Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,121 m
 Vol 0,0461 m³
 Gross weight 7,9 Kg Net weight 5,7 Kg

Notes

1850 __ / _13: 1-10V **Multi-volt**
 Extra cable length.



1855

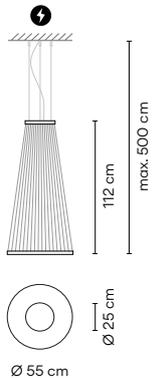

- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1 _ 2700 K - 3993 lm
 D →
 CRI >90

Control

1855 __ / __
 __ / 13 1-10V
 __ / 1D Push; DALI-2
 __ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote
 Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics


1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging



1 Box 0,62 x 0,62 x 0,121 m
 Vol 0,0461 m³
 Gross weight 8,3 Kg Net weight 6,1 Kg

Notes

1855 __ / _13: 1-10V **Multi-volt**
 Extra cable length.



1860



- Finishes (threads)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 3993 lm
D
CRI >90

Control

1860 _ _ / _ _
_ _ / 13 1-10V
_ _ / 1D Push; DALI-2
_ _ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



Surface Built-in S Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging



1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,7 Kg Net weight 6,5 Kg

Notes

1860 _ _ / _ 13: 1-10V **Multi-volt**
Extra cable length.



1865



- Finishes (threads)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 6050 lm
D
CRI >90

Control

1865 _ _ / _ _
_ _ / 13 1-10V
_ _ / 1D Push; DALI-2
_ _ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



Surface Built-in S Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 50W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging


1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 11,8 Kg Net weight 8,8 Kg

Notes

1865 _ _ / _ 13: 1-10V **Multi-volt**
Extra cable length.



1870

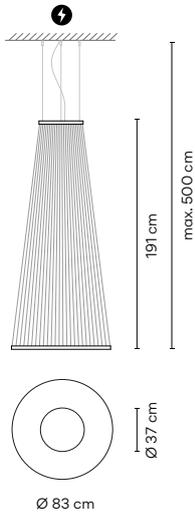


- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 6050 lm
 ID →
 CRI >90

Control
 1870 _ _ / _ _
 _ _ / 13 1-10V
 _ _ / 1D Push; DALI-2
 _ _ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials
 Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.


Light Source and electronics
 1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging
 1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 12,4 Kg Net weight 9,4 Kg

Notes
 1870 _ _ / 13: 1-10V **Multi-volt**
 Extra cable length.



1875

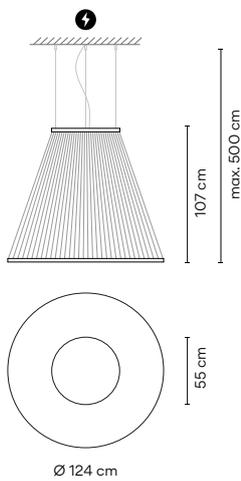


- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 9196 lm
 ID →
 CRI >90

Control
 1875 _ _ / _ _
 _ _ / 13 1-10V
 _ _ / 1D Push; DALI-2
 _ _ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection




_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials
 Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.


Light Source and electronics
 1 x LED STRIP 76W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging
 1 Box 1,35 x 1,35 x 0,12 m
 Vol 0,2187 m³
 Gross weight 15,9 Kg Net weight 11,9 Kg

Notes
 1875 _ _ / 13: 1-10V **Multi-volt**
 Extra cable length.



1880

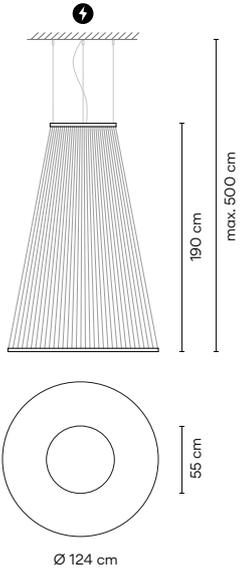

- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9196 lm
D


CRI >90

Control

- 1880 _ _ / _ _
- _ _ / 13 1-10V
- _ _ / 1D Push; DALI-2
- _ _ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Select Electrical connection



- _10 Surface
- _24 Built-in S
- _31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 16,8 Kg Net weight 12,8 Kg

Notes

1880 _ _ / _ 13: 1-10V **Multi-volt**

Extra cable length.



Select Electrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

- _31 Remote Micro
- _24 Built-in S




Ø 3 cm height 7 cm Ø 12 cm height 6 cm

for plaster ceilings. Black finish. black finish.

Regular ceiling


- _10 Surface




Ø 25,5 cm height 4,5 cm Ø 37,5 cm height 4,5 cm

black finish. black finish.

Remote



Built-in






Funnel

A gentle presence with a distinctly sculptural form, Funnel is a study in materiality, light and space.

Ceiling Wall



2012



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 36/ _ _ Soft Pink (NCS S 1010-Y50R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1 _ 2700 K - 631,7 lm
E
- CRI >80
- /2 _ 3000 K - 649 lm
E
- CRI >80
- /3 _ 3500 K - 655,4 lm
F
- CRI >90

Control

2012 _ _ / _ 0 On/ Off

Finishes

- 51/ _ _ Gold leaf (Gold leaf)

LED Colour Temperature

- /1 _ 2700 K - 631,7 lm
E
- CRI >80
- /2 _ 3000 K - 649 lm
E
- CRI >80
- /3 _ 3500 K - 655,4 lm
F
- CRI >90

Control

2012 51 / _ 0 On/ Off

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.



Light Source and electronics
1 x LED PLATE 6,3 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,27 x 0,27 x 0,16 m
Vol 0,0116 m³
Gross weight 0,892 Kg Net weight 0,45 Kg



2013



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 36/ _ _ Soft Pink (NCS S 1010-Y50R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1_ 2700 K - 2580 lm
E

CRI >80

/2_ 3000 K - 2580 lm
E

CRI >90

/3_ 3500 K - 2580 lm
F

CRI >90

Control

2013 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2

_ _ / _ Z Casambi

Finishes

- 51/ _ _ Gold leaf (Gold leaf)

LED Colour Temperature

/1_ 2700 K - 2580 lm
E

CRI >80

/2_ 3000 K - 2580 lm
E

CRI >90

/3_ 3500 K - 2580 lm
F

CRI >90

Control

2013 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2

_ _ / _ Z Casambi

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.

Light Source and electronics


6 x LED 4,5 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,53 Kg Net weight 2 Kg



2014



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 36/ _ _ Soft Pink (NCS S 1010-Y50R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1_ 2700 K - 2580 lm
E

CRI >80

/2_ 3000 K - 2580 lm
E

CRI >80

/3_ 3500 K - 2580 lm
F

CRI >90

Control

2014 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2

_ _ / _ Z Casambi

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.

Light Source and electronics

6 x LED 4,5 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 3,782 Kg Net weight 3,3 Kg



Rhythm Horizontal

Design by Arik Levy

Minimalist in form yet simultaneously complex, Rhythm features slender light modules of varying lengths, each fitted with an LED, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, the collection offers total freedom of composition.

Pendant

Stick 47 cm



2110

45 x 47 cm



2111

93 x 47 cm



2112

141 x 47 cm



2113

189 x 47 cm

Stick 87 cm



2120

63 x 87 cm



2121

131 x 87 cm



2122


199 x 87 cm



2155

49 x 87 cm

Each project is unique.
 Personalise your own
 Rhythm composition
 quick and easy.

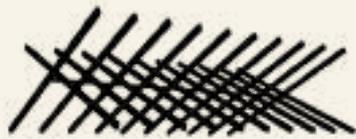

2110

- Finishes
- 14/ __ Chocolate (RAL 8019)
 - 58/ __ Off-White (RAL D2 1109005)

LED Colour Temperature

- /1 2700 K - 4332 lm
- /3 3500 K - 4578 lm

LED  CRI >90


Control

2110 __ / __

__ / _1 DALI-2

__ / _3 1-10V

__ / _Z Casambi



Materials

Stick: PA- Polyamide.
 Diffuser: PC- Polycarbonate.
 Canopy: Steel.

Light Source and electronics

10 x LED STRIP 30V 2,9 W
 Constant Voltage 30V
 100-240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,0591 m³
 Gross weight 7,7 Kg Net weight 6 Kg

Notes

2110 __ / _1: DALI-2 

2110 __ / _3: 1-10V 


219114 Built-in accessory (96 mm) chocolate

219158 Built-in accessory (96 mm) off-white

Surface and built-in fitting.
 Extra cable length.

       Ø 18,5 cm Only for built-in

2111



- Finishes**
- 14/ _ _ Chocolate (RAL 8019)
 - 58/ _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 8664 lm
/3 _ 3500 K - 9157 lm

☐

CRI >90

Control

2111 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1570 m³
Gross weight 14,2 Kg Net weight 10,5 Kg

Notes

2111 _ _ / _ 1: DALI-2 **Multi-volt**
2111 _ _ / _ 3: 1-10V **Multi-volt**

219114 Built-in accessory (96 mm) chocolate


219158 Built-in accessory (96 mm) off-white

Surface and built-in fitting.

Extra cable length.



2112



- Finishes**
- 14/ _ _ Chocolate (RAL 8019)
 - 58/ _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 12996 lm
/3 _ 3500 K - 13736 lm

☐

CRI >90

Control

2112 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0430 m³
Gross weight 10,3 Kg Net weight 7 Kg

Notes

2112 _ _ / _ 1: DALI-2 **Multi-volt**
2112 _ _ / _ 3: 1-10V **Multi-volt**

219014 Built-in accessory (44,5 mm) chocolate


219058 Built-in accessory (44,5 mm) off-white

Surface and built-in fitting.

Extra cable length.



2113



- Finishes**
- 14/ _ _ Chocolate (RAL 8019)
 - 58/ _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 17328 lm
/3 _ 3500 K - 18314 lm

☐

CRI >90

Control

2113 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

40 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1900 m³
Gross weight 17,2 Kg Net weight 13,5 Kg

Notes

2113 _ _ / _ 1: DALI-2 **Multi-volt**
2113 _ _ / _ 3: 1-10V **Multi-volt**

219014 Built-in accessory (44,5 mm) chocolate


219058 Built-in accessory (44,5 mm) off-white

Surface and built-in fitting.

Extra cable length.



2120



- Finishes
- 14/ __ Chocolate (RAL 8019)
 - 58/ __ Off-White (RAL D2 1109005)

LED Colour Temperature

- /1_ 2700 K - 7602 lm
- /3_ 3500 K - 8035 lm

LED icon:

CRI >90

Control

2120 __ / __

- __ / 1 DALI-2
- __ / 3 1-10V
- __ / Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
 Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics

10 x LED STRIP 30V 5,8 W
 Constant Voltage 30V
 100-240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,1380 m³
 Gross weight 9,5 Kg Net weight 7,3 Kg

Notes

2120 __ / 1: DALI-2
 2120 __ / 3: 1-10V

219214 Built-in accessory

(136 mm) chocolate

219258 Built-in accessory


(136 mm) off-white

Surface and built-in fitting.

Extra cable length.

Ø 18,5 cm Only for built-in

2121



- Finishes
- 14/ __ Chocolate (RAL 8019)
 - 58/ __ Off-White (RAL D2 1109005)

LED Colour Temperature

- /1_ 2700 K - 15204 lm
- /3_ 3500 K - 16070 lm

LED icon:

CRI >90

Control

2121 __ / __

- __ / 1 DALI-2
- __ / 3 1-10V
- __ / Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
 Diffuser: Polycarbonate.
 Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 5,8 W
 Constant Voltage 30V
 100-240V 50/60Hz

Notes

2 Boxes
 Total Vol 0,1664 m³
 Gross weight 14,7 Kg Net weight 10,5 Kg

Notes

2121 __ / 1: DALI-2
 2121 __ / 3: 1-10V

219014 Built-in accessory

(44,5 mm) chocolate

219058 Built-in accessory


(44,5 mm) off-white

Surface and built-in fitting.

Extra cable length.

Ø 18,5 cm Only for built-in

2122



- Finishes
- 14/ __ Chocolate (RAL 8019)
 - 58/ __ Off-White (RAL D2 1109005)

LED Colour Temperature

- /1_ 2700 K - 22807 lm
- /3_ 3500 K - 24105 lm

LED icon:

CRI >90

Control

2122 __ / __

- __ / 1 DALI-2
- __ / 3 1-10V
- __ / Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
 Diffuser: Polycarbonate.
 Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 5,8 W
 Constant Voltage 30V
 100-240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,07120 m³
 Gross weight 24 Kg Net weight 21,5 Kg

Notes

2122 __ / 1: DALI-2
 2122 __ / 3: 1-10V

219014 Built-in accessory

(44,5 mm) chocolate

219058 Built-in accessory


(44,5 mm) off-white

Surface and built-in fitting.

Extra cable length.

Ø 18,5 cm Only for built-in

2155
Wood



Finishes
 82/ ___ White oak
 83/ ___ American walnut

LED Colour Temperature
 /1 _ 2700 K - 5893 lm
 /3 _ 3500 K - 6213 lm
 D
 CRI >90

Control
 2155 ___ / ___
 ___ / ___ 1 DALI-2
 ___ / ___ 3 1-10V
 ___ / ___ Z Casambi

Materials
 Stick: Wood. Spacers: Aluminum.
 Diffuser: PC-Polycarbonate.
 Canopy: Steel.

Light Source and electronics
 8 x LED STRIP 5,8 W 30V
 Constant Voltage 30V
 100~240V 50/60Hz

Packaging
 2 Cajas
 Total Vol 0,1570 m³
 Peso bruto 8,5 Kg Peso neto 6,3 Kg

Notes
 2155 ___ / ___ 1: DALI-2 **Multi-volt**
 2155 ___ / ___ 3: 1-10V **Multi-volt**

219282 Built-in accessory
 (136 mm) Beige D1
219283 Built-in accessory
 (136 mm) Brown D1

Surface and built-in fitting.
 Extra cable length.

LED IP20 CE UK ENE Bi-volt
 Ø 18,5 cm Only for built-in




Rhythm Vertical

Design by Arik Levy


Minimalist in form yet simultaneously complex, Rhythm features slender light modules of varying lengths, each fitted with an LED, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, the collection offers total freedom of composition.

Pendant


Stick 47 cm

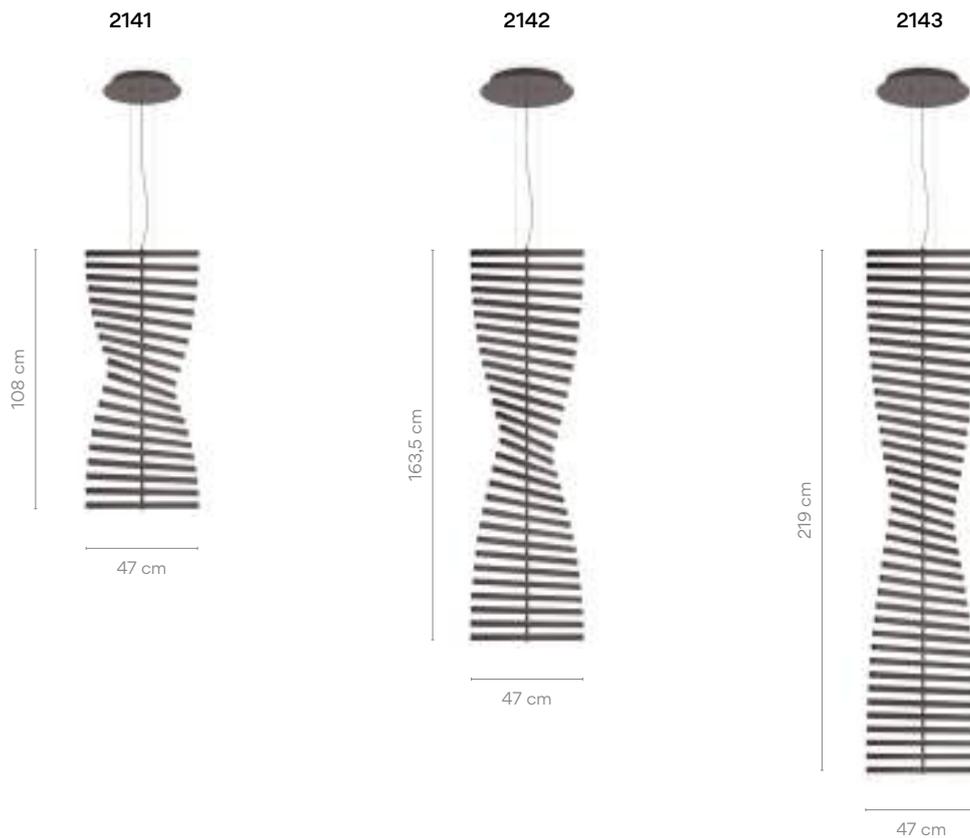

Stick 87 cm

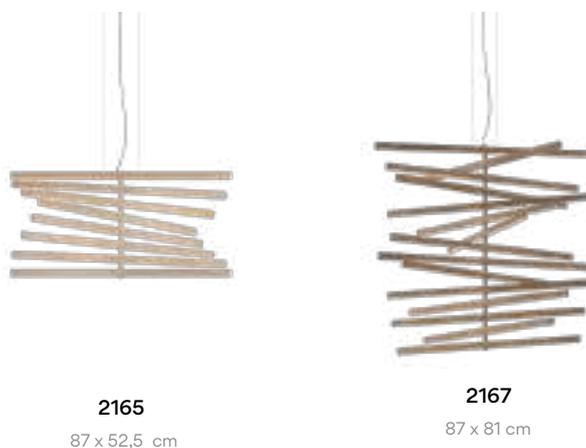

Each project is unique.
Personalise your own
Rhythm composition
quick and easy.

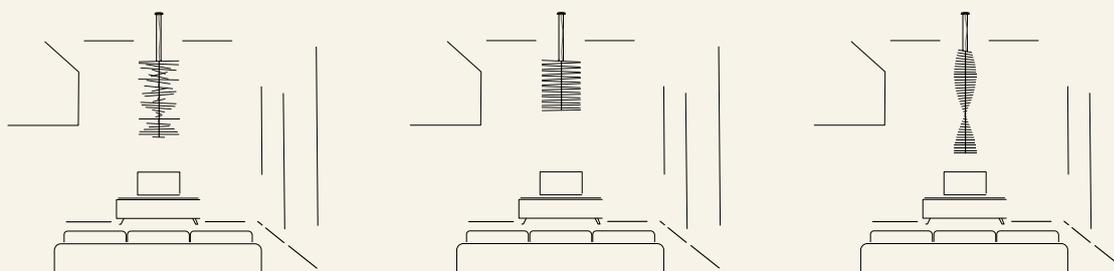

2141

- Finishes**
- 14/ _ _ Chocolate (RAL 8019)
 - 58/ _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

- /1 _ 2700 K - 8664 lm
- /3 _ 3500 K - 9157 lm

□ ▸

CRI >90


Control

2141 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ 3 1-10V

_ _ / _ Z Casambi



Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,5850 m³
Gross weight 10,3 Kg Net weight 7,4 Kg

Notes

2141 _ _ / 1: DALI-2 **Multi-volt**

2141 _ _ / 3: 1-10V **Multi-volt**

219114 Built-in accessory (96 mm) chocolate

219158 Built-in accessory (96 mm) off-white

Surface and built-in fitting.
Extra cable length.

LED IP20 CE UK ENE Bi-volt

⌀ 18,5 cm Only for built-in

2142

- Finishes**
- 14/ _ _ Chocolate (RAL 8019)
 - 58/ _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

- /1 _ 2700 K - 12996 lm
- /3 _ 3500 K - 13736 lm

□ ▸

CRI >90


Control

2142 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ 3 1-10V

_ _ / _ Z Casambi



Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6239 m³
Gross weight 13,7 Kg Net weight 8,2 Kg

Notes

2142 _ _ / 1: DALI-2 **Multi-volt**

2142 _ _ / 3: 1-10V **Multi-volt**

219114 Built-in accessory (96 mm) chocolate **135,00 €**


219158 Built-in accessory (96 mm) off-white **135,00 €**

Surface and built-in fitting.
Extra cable length.

LED IP20 CE UK ENE Bi-volt

⌀ 18,5 cm Only for built-in

2143

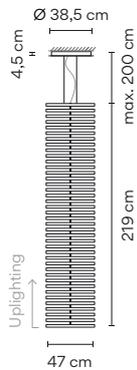

- Finishes
- 14/ __ Chocolate (RAL 8019)
 - 58/ __ Off-White (RAL D2 1109005)

LED Colour Temperature

- /1_ 2700 K - 8664 lm
- /3_ 3500 K - 9157 lm

LED icon:

CRI >90

Control

- 2143 __ / __
- __ / 1 DALI-2
 - __ / 3 1-10V
 - __ / Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
 Diffuser: Polycarbonate.
 Canopy: Steel.

Light Source and electronics

40 x LED STRIP 30V 2,9 W
 Constant Voltage 30V
 100~240V 50/60Hz

Notes

2 Boxes
 Total Vol 0,6600 m³
 Gross weight 16,9 Kg Net weight 13 Kg

Notes

- 2143 __ / 1: DALI-2
- 2143 __ / 3: 1-10V


219114 Built-in accessory (96 mm) chocolate

219158 Built-in accessory (96 mm) off-white

Surface and built-in fitting.
 Extra cable length.

-
- Ø 18,5 cm Only for built-in

2165
Madera



- Finishes
- 82/ __ White oak
 - 83/ __ American walnut

LED Colour Temperature

- /1_ 2700 K - 5893 lm
- /3_ 3500 K - 6213 lm

LED icon:

CRI >90

Control

- 2165 __ / __
- __ / 1 DALI-2
 - __ / 3 1-10V
 - __ / Z Casambi

Materials

Stick: Wood. Spacers: Aluminum.
 Diffuser: Polycarbonate.
 Canopy: Steel.

Light Source and electronics

8 x LED STRIP 5,8W 30V
 Constant Voltage 30V
 100~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,1570 m³
 Gross weight 8,5 Kg Net weight 6,3 Kg

Notes

- 2165 __ / 1: DALI-2
- 2165 __ / 3: 1-10V


219282 Built-in accessory (136 mm) Beige D1

219283 Built-in accessory (136 mm) Brown D1

Surface and built-in fitting.
 Extra cable length.

-
- Ø 18,5 cm Only for built-in

2167
Madera



- Finishes
- 82/ __ White oak
 - 83/ __ American walnut

LED Colour Temperature

- /1_ 2700 K - 11049 lm
- /3_ 3500 K - 11649 lm

LED icon:

CRI >90

Control

- 2167 __ / __
- __ / 1 DALI-2
 - __ / 3 1-10V
 - __ / Z Casambi

Materials

Stick: Wood. Spacers: Aluminum.
 Diffuser: Polycarbonate.
 Canopy: Steel.

Light Source and electronics

15 x LED STRIP 5,8W 30V
 Constant Voltage 30V
 100~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,1570 m³
 Gross weight 12,6 Kg Net weight 6,6 Kg

Notes

- 2167 __ / 1: DALI-2
- 2167 __ / 3: 1-10V

219282 Built-in accessory (136 mm) Beige D1

219283 Built-in accessory (136 mm) Brown D1

Surface and built-in fitting.
 Extra cable length.

-
- Ø 18,5 cm Only for built-in

Guise

Design by Diez Office

Crafted of precision glass and embedded with a row of recessed LEDS, Guise explores the relationship between light and transparency. The light inside the glass appears invisible while the delicately engraved surface radiates an intense glow, the markings beautifully diffusing the light.

Wall

SURFACE



2260

Ø 54 cm

SURFACE



2262

Ø 92 cm

REMOTE



2263

Ø 92 cm
Infinite Colour

2260

Finishes

- 18/ _ _ Graphite (ADAPTA RF9913WX)

LED Colour Temperature


/2_ 3000 K - 445 lm



CRI >90

Control

2260 18 / 26 Sensor



Materials

Diffuser: Borosilicate.
LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 10 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging


1 Box 0,69 x 0,69 x 0,09 m
Vol 0,043 m³
Gross weight 7 Kg Net weight 4 Kg

Notes

Electric cable with plug 3 m

LED IP20 Dimmer

2262



Finishes

● 18/ _ _ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature

/2_ 3000 K - 897 lm



CRI >90

Control

2262 18 / 26 Sensor

Materials

Diffuser: Borosilicate.
 LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 17,2 W.
 Constant Voltage 24V
 100~240V 50/60Hz

Packaging


1 Box 1,04 x 1,04 x 0,10 m
 Vol 0,104 m³
 Gross weight 16,5 Kg Net weight 11,58 Kg

Notes

Electric cable with plug 3 m



2263



Finishes

● 18/ _ _ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature

/A Infinite Colour (TW + RGB)
 778 lm - 939 lm



CRI >90

Control

2263 18 / AY_ 30
 Protapixel* (Remote)
 (also with push buttons)

Materials

Diffuser: Borosilicate. LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 17,2 W.
 Constant Voltage 24V
 100~240V 50/60Hz

Packaging

1 Box 1,04 x 1,04 x 0,10 m
 Vol 0,104 m³
 Gross weight 16,5 Kg Net weight 11,58 Kg

Notes

ProtoPixel products are compatible with
 all other DALI-2 products via a designated
 gateway (please consult us).



Pendant

2270




Ø 16 cm

2272



Ø 16 cm

2277

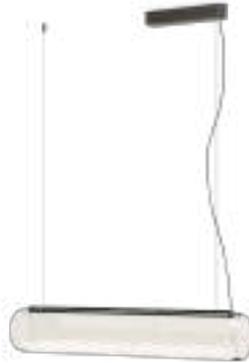

89 cm

2282




Ø 25 cm

2288



Ø 40 cm

2270



Finishes
● 18/ __ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2_ 3000 K - 1097 lm
G
CRI >90

Control
2270 __ / __

- __ / 21 DALI-2
- __ / 26 Sensor
- __ / 22 Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 20 W
Constant Voltage 24V
110~240V 50/60Hz


Packaging
1 Box 0,87 x 0,35 x 0,37 m
Vol 0,113 m³
Gross weight 6,5 Kg Net weight 5 Kg

Notes
2270 __ / 21: DALI-2 **Multi-volt**
2270 __ / 26: Sensor **Bi-volt**

Extra cable length.




2272




Finishes ● 18/ __ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /2 _ 3000 K - 1097 lm G CRI >90	Control 2272 __ / 26 Sensor
Materials Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel.		Packaging 1 Box 0,45 x 0,80 x 0,20 m Vol 0,0072 m ³ Gross weight 16,10 Kg Net weight 16,10 Kg
Light Source and electronics 1 x LED STRIP 24V 20 W Constant Voltage 24V 110-240V 50/60Hz		Notes 2272 __ / 26: Sensor Bi-volt Extra cable length.
<p>LED IP20 CE UK ENEC</p>		

2277




Finishes ● 18/ __ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /2 _ 3000 K - 1404 lm G CRI >90	Control 2277 __ / __ __ / 21 DALI-2 __ / 26 Sensor __ / 2Z Casambi
Materials Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel.		Packaging 1 Box 1,18 x 0,35 x 0,37 m Vol 0,153 m ³ Gross weight 9,5 Kg Net weight 7,5 Kg
Light Source and electronics 1 x LED STRIP 24V 30 W Constant Voltage 24V 100-240V 50/60Hz		Notes 2277 __ / 21: DALI-2 Multi-volt 2277 __ / 26: Sensor Bi-volt Extra cable length.
<p>LED IP20 CE UK ENEC Dimmer</p>		

2282



Finishes ● 18/ __ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /2 _ 3000 K - 398 lm G CRI >90	Control 2282 __ / __ __ / 21 DALI-2 __ / 26 Sensor __ / 2B Push; 1-10V __ / 2Z Casambi
Materials Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel.		Packaging 1 Box 0,41 x 0,41 x 0,38 m Vol 0,0639 m ³ Gross weight 3,3 Kg Net weight 2,3 Kg
Light Source and electronics 1 x LED STRIP 24V 12 W Constant Voltage 24V 110-240V 50/60Hz		Notes 2282 __ / 21: DALI-2 Bi-volt 2282 __ / 26: Sensor Bi-volt 2282 __ / 2B: Push; 1-10V Bi-volt Extra cable length.
<p>LED IP20 CE UK ENEC</p>		

2288



Finishes ● 18/ __ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /2 _ 3000 K - 868 lm G CRI >90	Control 2288 __ / __ __ / 21 DALI-2 __ / 26 Sensor __ / 2B Push; 1-10V __ / 2Z Casambi
Materials Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel.		Packaging 1 Box 0,56 x 0,56 x 0,46 m Vol 0,1443 m ³ Gross weight 11,7 Kg Net weight 9,7 Kg
Light Source and electronics 1 x LED STRIP 24V 18 W Constant Voltage 24V 110-240V 50/60Hz		Notes 2288 __ / 21: DALI-2 Multi-volt Extra cable length.
<p>LED IP20 CE UK ENEC</p>		

Ceiling

2292

Ø 25 cm




2298

Ø 40 cm



2292



Finishes
● 18/ __ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 398 lm
[G] →
CRI >90

Control
2292 __ / __
__ / 21 DALI-2
__ / 2B Push; 1-10V
__ / 2Z Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.



Light Source and electronics
1 x LED STRIP 24V 12 W
Constant Voltage 24V
110-240V 50/60Hz

Packaging
1 Box 0,41 x 0,41 x 0,33 m
Vol 0,0555 m³
Gross weight 3,2 Kg Net weight 2,2 Kg

Notes
2292 __ / 21: DALI-2 [Bi-volt]
2292 __ / 2B: Push; 1-10V [Bi-volt]



2298



Finishes
● 18/ __ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 398 lm
[G] →
CRI >90

Control
2298 __ / __
__ / 21 DALI-2
__ / 2B Push; 1-10V
__ / 2Z Casambi


Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 18 W
Constant Voltage 24V
220-240V 50/60Hz

Packaging
1 Box 0,56 x 0,56 x 0,46 m
Vol 0,1443 m³
Gross weight 13,3 Kg Net weight 11,3 Kg

Notes
2298 __ / 21: DALI-2 [Multi-volt]



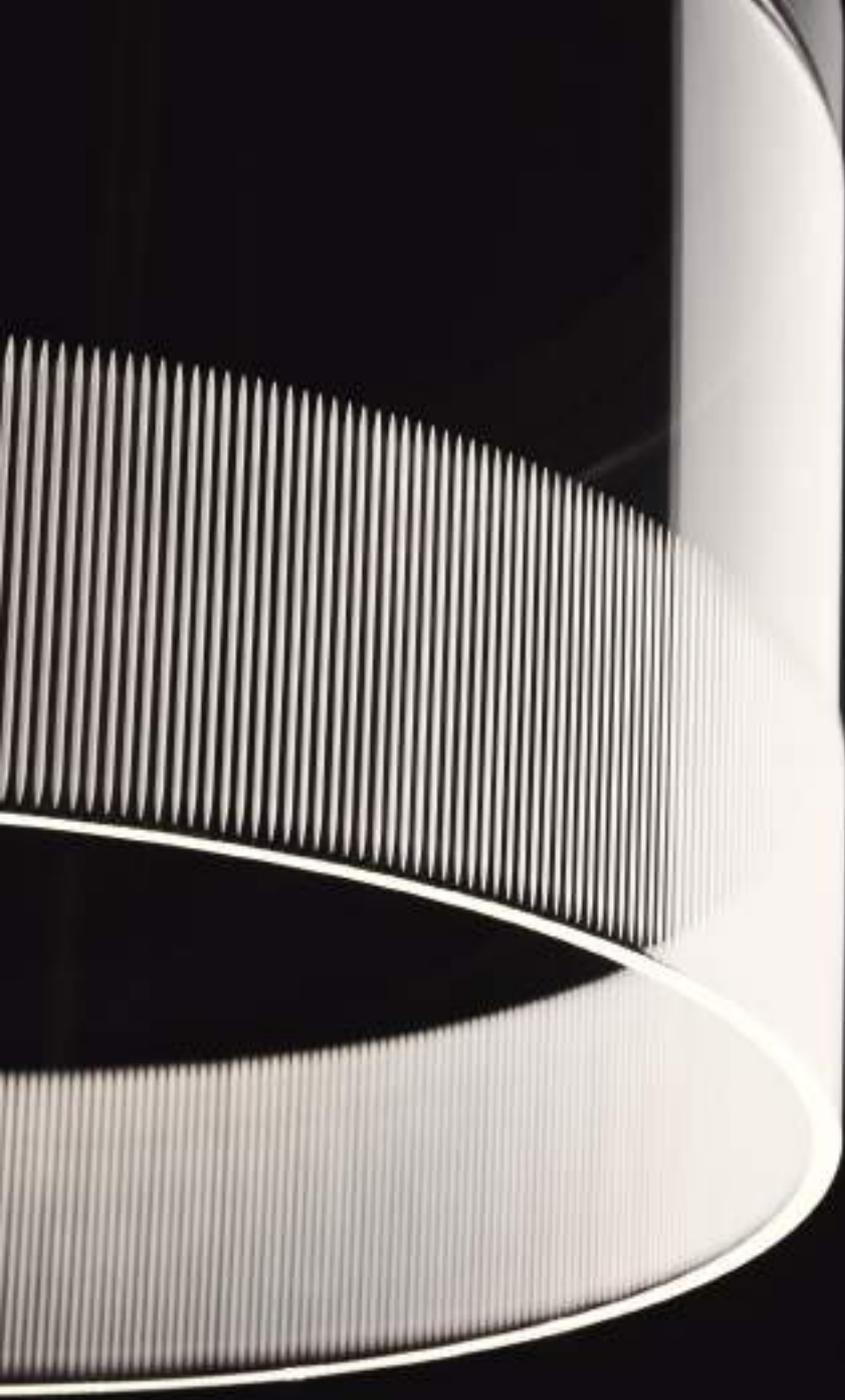

Halo


Design by Martín Azúa

A seamless merging of light and matter, Halo lends the effect of light floating in the air. Powered by LED bulbs that remain invisible within their opalized, spherical moulds, the light flows freely from its source.

Pendant



2330
Ø 55,5 cm

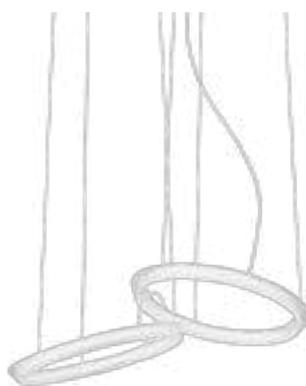

2331
89 cm
2 Units




2332
127 cm
3 Units




2333
197 cm
5 Units

Each project is unique.
 Personalise your own
 Halo composition
 quick and easy.

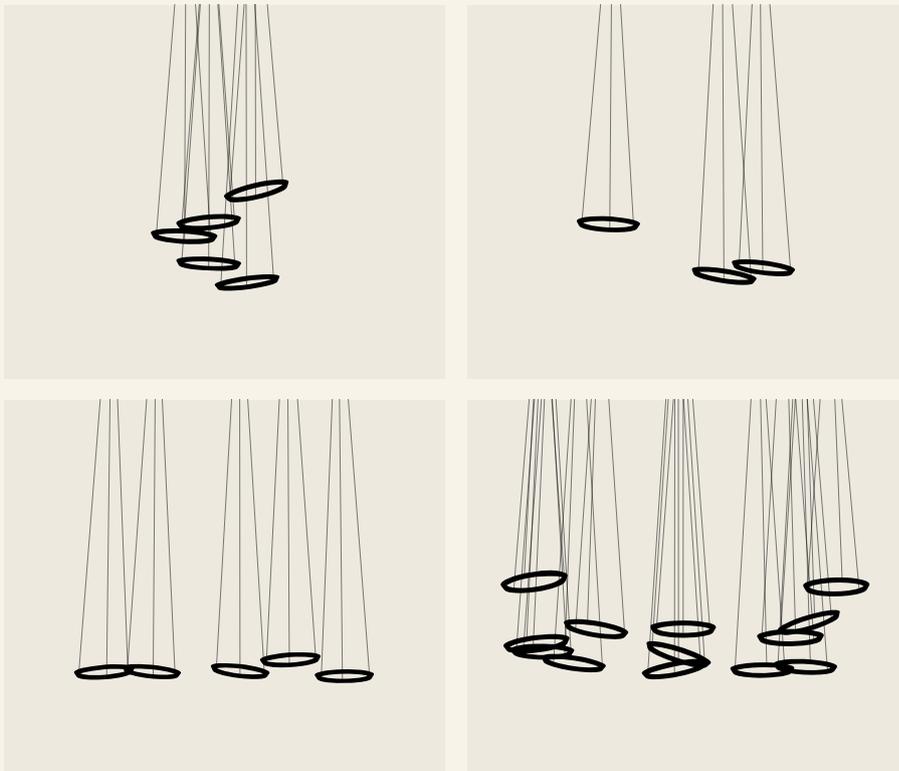

2330



Finishes
 ● 03/ __ White
 (RAL 9016)

LED Colour Temperature
 /1 _ 2700 K - 1904 lm
 CRI >90
 /2 _ 3000 K - 1726 lm
 CRI >80
 ▭ ▸

Control
 2330 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi

Materials
 LED support: Aluminum.
 Diffuser: PMMA.
 Canopy: Steel.


Light Source and electronics
 1 x LED STRIP 24V 23 W
 Constant Voltage 24V
 100~277V 50/60Hz

Packaging
 1 Box 0,60 x 0,60 x 0,27 m
 Vol 0,0972 m³
 Gross weight 5,75 Kg Net weight 3,75 Kg

Notes
 2330 __ / _ 1: DALI-2 **Multi-volt**
 2330 __ / _ 3: 1-10V **Multi-volt**
 Extra cable length.



2331



Finishes
 ● **03/** __ White (RAL 9016)

LED Colour Temperature
 /1 _ 2700 K - 3808 lm CRI >90
 /2 _ 3000 K - 3453 lm CRI >80
 D >

Control
2331 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi

Materials
 LED support: Aluminum.
 Diffuser: PMMA.
 Canopy: Steel


Packaging
 1 Box 0,60 x 0,60 x 0,27 m
 Vol 0,0972 m³
 Gross weight 10,25 Kg Net weight 6,25 Kg

Light Source and electronics
 2 x LED STRIP 24V 23 W
 Constant Voltage 24V
 100-277V 50/60Hz

Notes
 2331 __ / _ 1: DALI-2 **Multi-volt**
 2331 __ / _ 3: 1-10V **Multi-volt**
 Extra cable length.

LED IP20 CE UK ENEC

2332



Finishes
 ● **03/** __ White (RAL 9016)

LED Colour Temperature
 /1 _ 2700 K - 5712 lm CRI >90
 /2 _ 3000 K - 5180 lm CRI >80
 D >

Control
2332 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi

Materials
 LED support: Aluminum.
 Diffuser: PMMA.
 Canopy: Steel.


Packaging
 1 Box 0,60 x 0,60 x 0,27 m
 Vol 0,0972 m³
 Gross weight 14,75 Kg Net weight 8,75 Kg

Light Source and electronics
 3 x LED STRIP 24V 23 W
 Constant Voltage 24V
 100-277V 50/60Hz

Notes
 2332 __ / _ 1: DALI-2 **Multi-volt**
 2332 __ / _ 3: 1-10V **Multi-volt**
 Extra cable length.

LED IP20 CE UK ENEC

2333



Finishes
 ● **03/** __ White (RAL 9016)

LED Colour Temperature
 /1 _ 2700 K - 9520 lm CRI >90
 /2 _ 3000 K - 8633 lm CRI >80
 D >

Control
2333 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi

Materials
 LED support: Aluminum.
 Diffuser: PMMA.
 Canopy: Steel.

Packaging
 2 Boxes
 Total Vol 0,1106 m³
 Gross weight 23,75 Kg Net weight 13,75 Kg

Light Source and electronics
 5 x LED STRIP 24V 23 W
 Constant Voltage 24V
 100-277V 50/60Hz

Notes
 2333 __ / _ 1: DALI-2 **Multi-volt**
 2333 __ / _ 3: 1-10V **Multi-volt**
 Extra cable length.

LED IP20 CE UK ENEC




Pendant



2340
152 cm
2 Units



2341
204 cm
3 Units

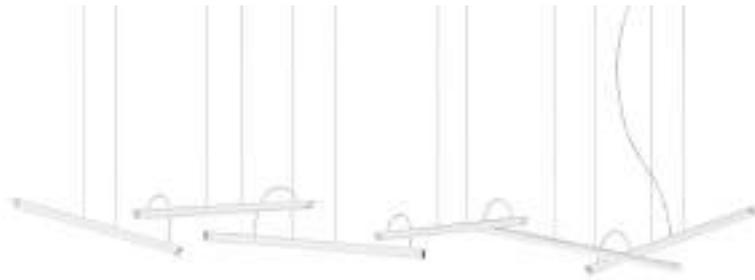


2342
336 cm
6 Units



2343
500 cm
9 Units

Each project is unique.
 Personalise your own
 Halo composition
 quick and easy.

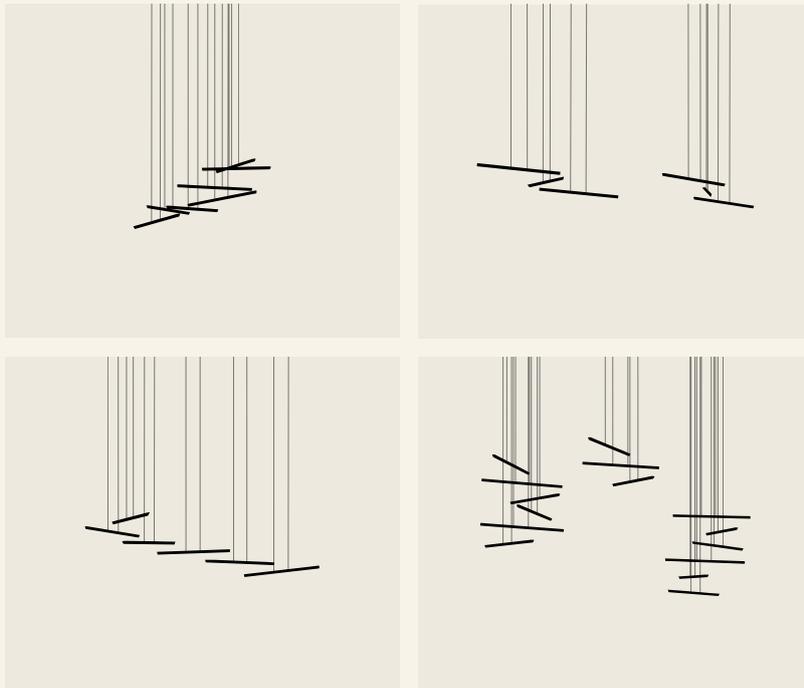


2340

Finishes
 ● 03/ __ White
 (RAL 9016)

LED Colour Temperature
 /1_ 2700 K - 1904 lm
 [F] →
 /2_ 3000 K - 1726 lm
 [G] →
 CRI >90

Control
 2340 __ / __
 __ / _1 DALI-2
 __ / _3 1-10V
 __ / _Z Casambi



⚡ Select Electrical connection



Surface Remote Micro Remote XXS

_10 Surface
 _31 Remote Micro
 _32 Remote XXS

Materials
 Diffuser: PMMA.
 Canopy: Steel.

Light Source and electronics
 2 x LED STRIP 24V 15,3 W
 Constant Voltage 24V
 100~277V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,0753 m³
 Gross weight 6,2 Kg Net weight 5,58 Kg

Notes
 2340 __ / _1: DALI-2 [Multi-volt]
 2340 __ / _3: 1-10V [Multi-volt]
 Extra cable length.




2341

Finishes
 03/ __ White
 (RAL 9016)

LED Colour Temperature
 /1 _ 2700 K - 4246 lm
 F
 /2 _ 3000 K - 3850 lm
 G
 CRI >90

Control

2341 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi



Select Electrical connection



Surface Remote Micro Remote XXS

_10 Surface
 _31 Remote Micro
 _32 Remote XXS

Materials

Diffuser: PMMA.
 Canopy: Steel.

Light Source and electronics

3 x LED STRIP 24V 15,3 W
 Constant Voltage 24V
 100-277V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,0753 m³
 Gross weight 7,3 Kg Net weight 6,57 Kg

Notes

2341 __ / _ 1: DALI-2 Multi-volt
 2341 __ / _ 3: 1-10V Multi-volt
 Extra cable length.




2342

Finishes
 03/ __ White
 (RAL 9016)

LED Colour Temperature
 /1 _ 2700 K - 8492 lm
 F
 /2 _ 3000 K - 7701 lm
 G
 CRI >90

Control

2342 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi



Select Electrical connection



Surface Remote Micro Remote XXS

_10 Surface
 _31 Remote Micro
 _32 Remote XXS

Materials

Diffuser: PMMA.
 Canopy: Steel.

Light Source and electronics

6 x LED STRIP 24V 15,3 W
 Constant Voltage 24V
 100-277V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,0756 m³
 Gross weight 11,8 Kg Net weight 10,25 Kg

Notes

2342 __ / _ 1: DALI-2 Multi-volt
 2342 __ / _ 3: 1-10V Multi-volt
 Extra cable length.




2343

Finishes
 ● 03/ __ White
 (RAL 9016)

LED Colour Temperature
 /1 _ 2700 K - 12739 lm
 F →
 /2 _ 3000 K - 11552 lm
 G →
 CRI >90

Control
 2343 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi



Select Electrical connection



Surface Remote Micro Remote XXS

_10 Surface
 _31 Remote Micro
 _32 Remote XXS

Materials
 Diffuser: PMMA.
 Canopy: Steel.
 Light Source and electronics
 9 x LED STRIP 24V 15,3 W
 Constant Voltage 24V
 100-277V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,0756 m³
 Gross weight 16,20 Kg Net weight 14,75 Kg

Notes
 2343 __ / _ 1: DALI-2 **Multi-volt**
 2343 __ / _ 3: 1-10V **Multi-volt**
 Extra cable length.



⚡ Select Eletrical connection

Choose your preferred installation option according to your needs.

For Ref. 2340, 2341

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

Regular ceiling

_10
Surface



Ø 30,5 cm

match with fixture finish.

For Ref. 2342, 2343

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

Regular ceiling


_10
Surface



Ø 35 cm

match with fixture finish.

Remote



Built-in



Wall



2360

102,5 x 5,7 cm

2360

- Finishes**
- **11/ __ Black**
(NCS S 8500-N)
 - **13/ __ Off-White**
(NCS S 1000-N)

LED Colour Temperature


- /1 _ 2700 K - 1415 lm
- /2 _ 3000 K - 1224 lm

F →
CRI >90

Control

2360 __ / __

- __ / _ 1 DALI-2
- __ / _ 3 1-10V
- __ / _ Z 30
Casambi (Remote)



Materials

Diffuser: PMMA.
LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,10 x 1,025 x 0,10 m
Vol 0,01 m³
Gross weight 2,25 Kg Net weight 1,75 Kg

Notes

2360 __ / _ 3: 1-10V **Multi-volt**



Halo Jewel

Design by Martín Azúa

Subtle light floating in the air and delicately suspended by a perfectly crafted steel structure. Light and matter in one.

Pendant

INDIVIDUAL MODELS

2350

Ø 56,3 cm



2351

Ø 56,3 cm



2355

Ø 16 x 350 cm



2356

Ø 27 x 350 cm




MULTIPLE MODELS



INDIVIDUAL MODEL

2350

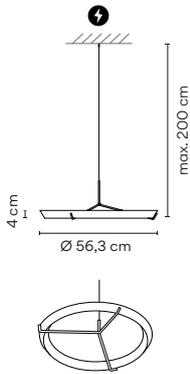

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 1904 lm [G] >	2350 __ / __
	CRI >90	__ / _ 1 DALI-2
	/2_ 3000 K - 2024 lm [F] >	__ / _ 3 1-10V
	CRI >80	__ / _ Z Casambi

Finishes	LED Colour Temperature	Control
● 20/ __ Gold (Gold)	/1_ 2700 K - 1904 lm [G] >	2350 __ / __
	CRI >90	__ / _ 1 DALI-2
		__ / _ 3 1-10V
		__ / _ Z Casambi

⚡ Select Electrical connection



- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: PMMA. LED support: Aluminum.
 Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
 Constant Voltage 24V
 100~277V 50/60Hz

Packaging

1 Box 0,6 x 0,6 x 0,27 m
 Vol 0,097 m³
 Gross weight 7 Kg Net weight 6,35 Kg

Notes

2350 __ / _ 1: DALI-2
 2350 __ / _ 3: 1-10V
 Extra cable length.




2351



Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 1904 lm [G] >	2351 __ / __
	CRI >90	__ / _ 1 DALI-2
	/2_ 3000 K - 2024 lm [F] >	__ / _ 3 1-10V
	CRI >80	__ / _ Z Casambi

Finishes	LED Colour Temperature	Control
● 20/ __ Gold (Gold)	/1_ 2700 K - 1904 lm [G] >	2351 __ / __
	CRI >90	__ / _ 1 DALI-2
		__ / _ 3 1-10V
		__ / _ Z Casambi

⚡ Select Electrical connection

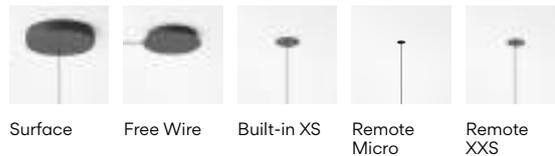

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: PMMA. LED support: Aluminum.
 Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
 Constant Voltage 24V
 100~277V 50/60Hz

Packaging

1 Box 0,6 x 0,6 x 0,27 m
 Vol 0,097 m³
 Gross weight 7 Kg Net weight 6,35 Kg

Notes


2351 __ / _ 1: DALI-2 **Multi-volt**
 2351 __ / _ 3: 1-10V **Multi-volt**
 Extra cable length.



2355

Finishes ● 11/ __ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 1415 lm /2 _ 3000 K - 1224 lm F  CRI >90	Control 2355 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
---	---	---

Finishes ● 20/ __ Gold (Gold)	LED Colour Temperature /1 _ 2700 K - 1415 lm /2 _ 3000 K - 1224 lm F  CRI >90	Control 2355 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
--	---	---



 Select Electrical connection




- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials Diffuser: PMMA. LED support: Aluminum. Pendant structure: Steel. Ceiling rose: Steel.	Packaging 1 Box 0,13 x 0,19 x 1,265 m Vol 0,0312 m ³ Gross weight 5 Kg Net weight 4,1 Kg
Light Source and electronics 1 x LED STRIP 24V 15,3 W Constant Voltage 24V 220~240V 50/60Hz	Notes Extra cable length.
LED  IP20  CE  UK  ENEC 	
Dimmer  Bi-volt 	

2356

Finishes ● 11/ __ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 4246 lm /2 _ 3000 K - 3672 lm F  CRI >90	Control 2356 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
---	---	---

Finishes ● 20/ __ Gold (Gold)	LED Colour Temperature /1 _ 2700 K - 4246 lm /2 _ 3000 K - 3672 lm F  CRI >90	Control 2356 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
--	---	---

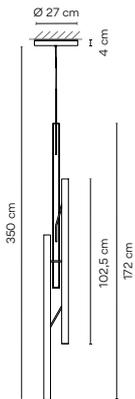


Materials Diffuser: PMMA. LED support: Aluminum. Pendant structure: Steel. Ceiling rose: Steel.	Packaging 1 Box 0,31 x 0,33 x 2 m Vol 0,2046 m ³ Gross weight 7,4 Kg Net weight 6,06 Kg
Light Source and electronics 3 x LED STRIP 24V 15,3 W Constant Voltage 24V 100~277V 50/60Hz	Notes 2356 __ / _ 1: DALI-2  2356 __ / _ 3: 1-10V  Extra cable length.
LED  IP20  CE  UK  ENEC 	
Dimmer  Bi-volt 	



MULTIPLE MODELS

Select your model at vibia.com and adjust

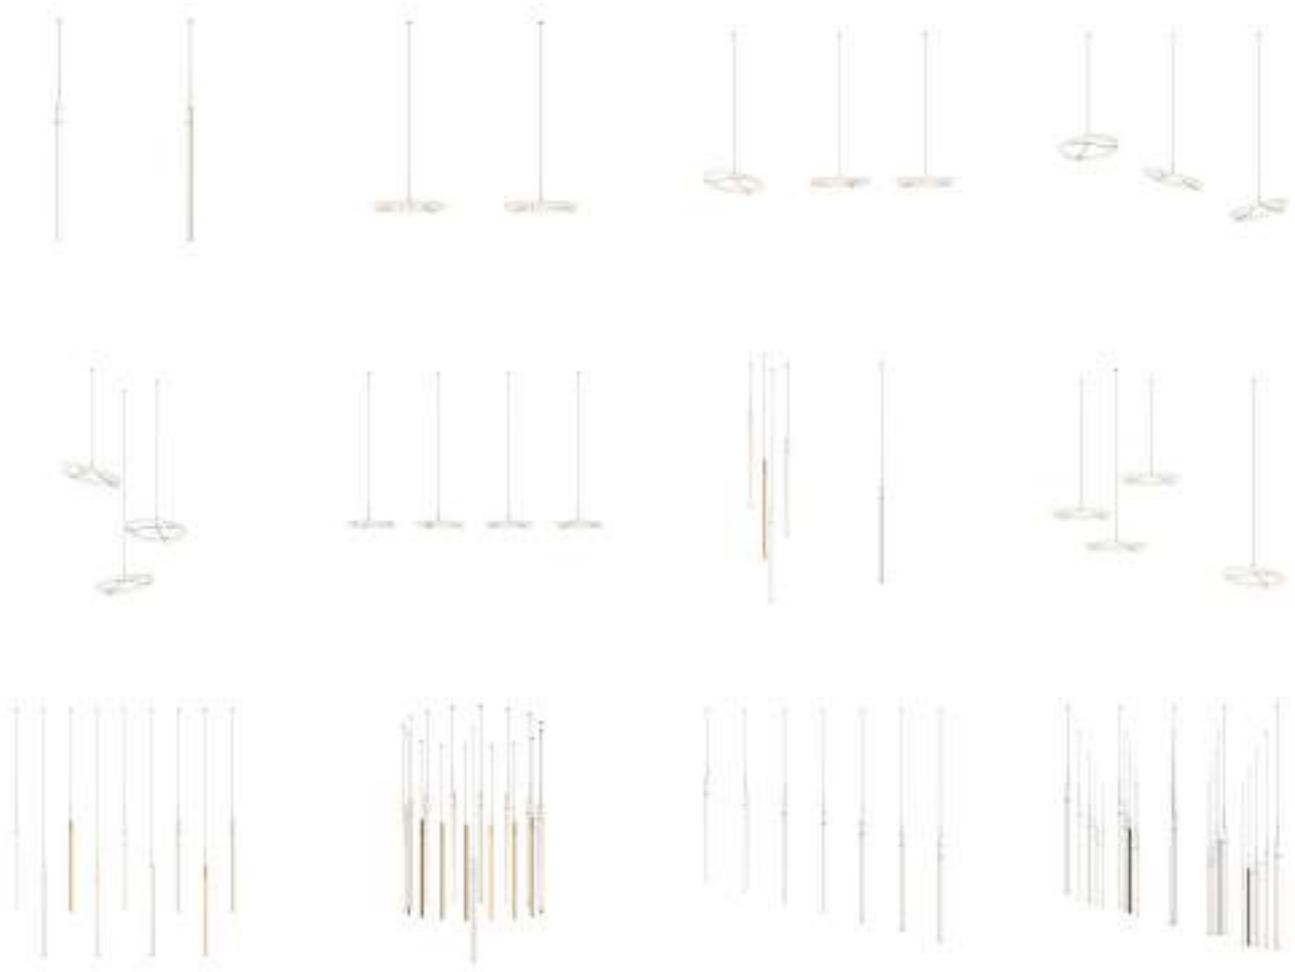

See more
multiple models
at vibia.com

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **20/** __ Gold
(Gold)

LED Colour Temperature

- /1 _ 2700 K
- /2 _ 3000 K
- CRI >80
- CRI >90

Control

Model __ / __

__ / _ 1 DALI-2

__ / _ 3 1-10V

__ / _ Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 2350, 2351

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Black finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>Black finish.</p>
---	---	--

Regular ceiling

<p>_10 Surface</p>  <p>Ø 27 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire</p> <p>Ø 22 cm</p> <p>you can choose the finish of the canopy among black or white.</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	---	--	---

For Ref. 2355


Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Black finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>Black finish.</p>
---	---	--


Regular ceiling

<p>_10 Surface</p>  <p>Ø 16 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p> <p>you can choose the finish of the canopy among black or white.</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	---	--	---

Remote



Built-in



Materials

Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Notes

Extra cable length.



Cosmos

Design by Lievore, Altherr, Molina


Design and light become one with Cosmos pendant. Flattened spheres in suspension that naturally descend from the ceiling and use light to draw a fluctuating course like a constellation of stars.

Pendant



Ø 19 cm

2500



Ø 27 cm

2501



Ø 48 cm

2502



55 cm

2510



65 cm

2511



76 cm


2515



86 cm

2516

2500



Finishes

- **14/** __ Chocolate (RAL 8019)
- **62/** __ Green (PANTONE 5645)
- **58/** __ Off-White (NCS S 2005-Y20R)

LED Colour Temperature

- /1** _ 2700 K - 485 lm CRI >90
- /3** _ 3500 K - 128 lm CRI >80

Control

- 2500** __ / __
-
- __ / _ **0** On/ Off
- __ / _ **1** DALI-2
-
- __ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

1 x LED 4,5 W 350mA
Constant Current 350 mA
/ 10: 100-240V 50/60Hz
/ 1B: 110-240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0180 m³
Gross weight 1,62 Kg Net weight 1,18 Kg

Notes


2500 __ / _ **0:** On/ Off **Bi-volt**

2500 __ / _ **1:** DALI-2 **Bi-volt**

Extra cable length.

LED IP20 CE UK ENEC

2501



- Finishes**
- **14/** __ Chocolate (RAL 8019)
 - **62/** __ Green (PANTONE 5645)
 - **58/** __ Off-White (NCS S 2005-Y20R)

LED Colour Temperature

/1 2700 K - 485 lm
CRI >90

/3 3500 K - 512 lm
CRI >80

E >

Control

2501 __ / __

__ / __ **0** On/ Off

__ / __ **1** DALI-2

__ / __ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel

Light Source and electronics

1 x LED 4,5 W 350mA
Constant Current 350 mA
/ **10**: 100-240V 50/60Hz
/ **1B**: 110-240V 50/60Hz

Packaging

1 Box 0,42 x 0,42 x 0,25 m
Vol 0,0441 m³
Gross weight 2,54 Kg Net weight 1,44 Kg

Notes


2501 __ / __ **0**: On/ Off **Bi-volt**

2501 __ / __ **1**: DALI-2 **Bi-volt**

Extra cable length.



2502



- Finishes**
- **10/** __ White (NCS S 0300-N)

LED Colour Temperature

/1 2700 K - 485 lm
CRI >90

/3 3500 K - 512 lm
CRI >80

E >

Control

2502 __ / __

__ / __ **0** On/ Off

__ / __ **1** DALI-2

__ / __ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA.
1 x LED 1 W 350 mA.
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 5,58 Kg Net weight 3,15 Kg

Notes


2502 __ / __ **0**: On/ Off **Bi-volt**

2502 __ / __ **1**: DALI-2 **Bi-volt**

Extra cable length.



2510



- Finishes**
- **62/** __ Green, White and Chocolate (PANTONE 5645, NCS S 0300-N, RAL 8019)

LED Colour Temperature

/1 2700 K - 1455 lm
CRI >90

/3 3500 K - 1537 lm
CRI >80

E >

Control

2510 __ / __

__ / __ **A** Push; 1-10V; DALI-2

__ / __ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

3 x LED 4,5 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging


1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 7,54 Kg Net weight 5,11 Kg


Notes

2510 __ / __ **A**: Push; 1-10V; DALI-2 **Bi-volt**


Compositions and finishes can not be changed

Extra cable length.




2511 	Finishes 62/ __ Green, White and Chocolate (PANTONE 5645, NCS S 0300-N, RAL 8019) 58/ __ Off-White, White and Chocolate (NCS S 2005-Y20R, NCS S 0300-N, RAL 801)	LED Colour Temperature /1 _ 2700 K - 1455 lm CRI >90 /3 _ 3500 K - 1537 lm CRI >80 E	Control 2511 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Diffuser: PC- Polycarbonate. Body: PU- Polyurethane. Canopy: Steel. Light Source and electronics 3 x LED 4,5 W 350 mA 1 x LED 1 W 350 mA. Constant Current 350 mA 110-240V 50/60Hz	Packaging 1 Box 0,60 x 0,60 x 0,27 m Vol 0,0970 m ³ Gross weight 9,25 Kg Net weight 6,82 Kg Notes 2511 __ / __ A: Push; 1-10V; DALI-2 Bi-volt Compositions and finishes can not be changed. Extra cable length.	

LED IP20 CE UK ENEC

2515 	Finishes 62/ __ Green, Chocolate and Off-White (Pantone 5645, RAL 8019, NCS S 2005-Y20R)	LED Colour Temperature /1 _ 2700 K - 1940 lm CRI >90 /3 _ 3500 K - 2050 lm CRI >80 E	Control 2515 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Diffuser: PC- Polycarbonate. Body: PU- Polyurethane. Canopy: Steel. Light Source and electronics 4 x LED 4,5 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	Packaging 1 Box 0,76 x 0,76 x 0,27 m Vol 0,1560 m ³ Gross weight 10,94 Kg Net weight 7,04 Kg Notes 2515 __ / __ A: Push; 1-10V; DALI-2 Bi-volt Compositions and finishes can not be changed. Extra cable length.	

LED IP20 CE UK ENEC

2516 	Finishes 62/ __ Green, White and Chocolate (PANTONE 5645, RAL 9010, RAL 8019)	LED Colour Temperature /1 _ 2700 K - 1940 lm CRI >90 /3 _ 3500 K - 2050 lm CRI >80 E	Control 2516 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Diffuser: PC- Polycarbonate. Body: PU- Polyurethane. Canopy: Steel. Light Source and electronics 4 x LED 4,5 W 350 mA 2x LED 1 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	Packaging 1 Box 0,73x0,73x0,32 m Vol 0,1705 m ³ Gross weight 14,62 Kg Net weight 15,5 Kg Notes 2516 __ / __ A: Push; 1-10V; DALI-2 Bi-volt Compositions and finishes can not be changed. Extra cable length.	

LED IP20 CE UK ENEC



Structural

Design by Arik Levy

Structural's cubic forms pair with slender metal rods that both join and separate the volumes, providing points of light connected in space. Its design deconstructs the light source and casts it in unexpected places, creating sculptural pieces integrated in the architecture.

Wall

2600

16 x 16 cm



2602

26 x 22 cm



2610

120 x 18 x 10 cm



2612

240 x 30 x 10 cm



2615

180 x 120 x 10 cm




2617

84 x 240 x 10 cm



2600



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
 - **21/** _ _ Black Grey (NCS S 7000-N)
- Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 6 W
Constant Voltage 24V
110-240V 50/60Hz

LED Colour Temperature

- /1** _ 2700 K - 700 lm
 - /2** _ 3000 K - 756 lm
 - /3** _ 3500 K - 763 lm
- CRI >90

Control


- 2600** _ _ / _ _
-
- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
-
- _ _ / _ **Z** Casambi

Packaging


1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 1,35 Kg Net weight 0,9 Kg

Notes

- 2600 _ _ / _ **1**: DALI-2 **Multi-volt**
- 2600 _ _ / _ **3**: 1-10V **Multi-volt**



2602



Finishes
 ● 15/ __ Grey L2 (NCS S 2500-N)
 ● 21/ __ Black Grey (NCS S 7000-N)
Finish customization
 (Available options: Vibia colour palette.)
 Minimum quantity 10 units. Price + 10%

LED Colour Temperature
 /1 _ 2700 K - 1400 lm **F**
 /2 _ 3000 K - 1513 lm
 /3 _ 3500 K - 1526 lm **E**
 CRI >90

Control
 2602 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi


Materials
 Diffuser: PC- Polycarbonate.
 Main body: Aluminum.
 Structures: Aluminum.
Light Source and electronics
 2 x LED PLATE 24V 6 W
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging
 1 Box 0,4 x 0,4 x 0,2 m
 Vol 0,032 m³
 Gross weight 2,85 Kg Net weight 1,9 Kg

Notes
 2602 __ / _ 1: DALI-2 **Multi-volt**
 2602 __ / _ 3: 1-10V **Multi-volt**
 * Electrical connection point.



2610



Finishes
 ● 15/ __ Grey L2 (NCS S 2500-N)
 ● 21/ __ Black Grey (NCS S 7000-N)
Finish customization
 (Available options: Vibia colour palette.)
 Minimum quantity 10 units. Price + 10%

LED Colour Temperature
 /1 _ 2700 K - 1400 lm **F**
 /2 _ 3000 K - 1513 lm
 /3 _ 3500 K - 1526 lm **E**
 CRI >90

Control
 2610 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi


Materials
 Diffuser: PC- Polycarbonate.
 Main body: Aluminum.
 Structures: Aluminum.
Light Source and electronics
 1 x LED PLATE 24V 6 W
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,036 m³
 Gross weight 3,6 Kg Net weight 2,4 Kg

Notes
 2610 __ / _ 1: DALI-2 **Multi-volt**
 2610 __ / _ 3: 1-10V **Multi-volt**
 * Electrical connection point.



2612



Finishes
 ● 15/ __ Grey L2 (NCS S 2500-N)
 ● 21/ __ Black Grey (NCS S 7000-N)
Finish customization
 (Available options: Vibia colour palette.)
 Minimum quantity 10 units. Price + 10%

LED Colour Temperature
 /1 _ 2700 K - 1400 lm **F**
 /2 _ 3000 K - 1513 lm
 /3 _ 3500 K - 1526 lm **E**
 CRI >90

Control
 2612 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi


Materials
 Diffuser: PC- Polycarbonate.
 Main body: Aluminum.
 Structures: Aluminum.
Light Source and electronics
 2 x LED PLATE 24V 6 W
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,042 m³
 Gross weight 3,9 Kg Net weight 2,6 Kg

Notes
 2612 __ / _ 1: DALI-2 **Multi-volt**
 2612 __ / _ 3: 1-10V **Multi-volt**
 * Electrical connection point.



2615



Finishes
 ● 15/ __ Grey L2 (NCS S 2500-N)
 ● 21/ __ Black Grey (NCS S 7000-N)
Finish customization
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

Materials
 Diffuser: PC- Polycarbonate.
 Main body: Aluminum.
 Structures: Aluminum.

Light Source and electronics
 2 x LED PLATE 24V 6 W
 Constant Voltage 24V
 110-240V 50/60Hz

LED Colour Temperature
 /1 _ 2700 K - 1400 lm
 /2 _ 3000 K - 1513 lm
 /3 _ 3500 K - 1526 lm
 CRI >90


Control
 2615 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi

Packaging
 2 Boxes
 Total Vol 0,038 m³
 Gross weight 4,35 Kg Net weight 2,9 Kg

Notes
 2615 __ / _ 1: DALI-2 **Multi-volt**
 2615 __ / _ 3: 1-10V **Multi-volt**
 * Electrical connection point.



2617



Finishes
 ● 15/ __ Grey L2 (NCS S 2500-N)
 ● 21/ __ Black Grey (NCS S 7000-N)
Finish customization
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

Materials
 Diffuser: PC- Polycarbonate.
 Main body: Aluminum.
 Structures: Aluminum.

Light Source and electronics
 2 x LED PLATE 24V 6 W
 Constant Voltage 24V
 110-240V 50/60Hz

LED Colour Temperature
 /1 _ 2700 K - 1400 lm
 /2 _ 3000 K - 1513 lm
 /3 _ 3500 K - 1526 lm
 CRI >90

Control
 2617 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi

Packaging
 2 Boxes
 Total Vol 0,041 m³
 Gross weight 4,35 Kg Net weight 2,9 Kg

Notes
 2617 __ / _ 1: DALI-2 **Multi-volt**
 2617 __ / _ 3: 1-10V **Multi-volt**
 * Electrical connection point.



Ceiling

2630

18 x 21 cm



2632

24 x 15 cm



2634

48 x 13 cm



2640

120 x 21 cm



2642

160 x 15 cm



2645

120 x 21 cm



2647

160 x 21 cm



2630

Finishes

● 15/ _ _ Grey L2
(NCS S 2500-N)

● 21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization

(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%)



LED Colour Temperature

Static White

/1 _ 2700 K - 998 lm

F →

/2 _ 3000 K - 1078 lm

/3 _ 3500 K - 1087 lm

E →

Tunable White

/8 _ (2200 K - 4000 K)
820 lm - 1060 lm

G → - F →

CRI >90

Control

2630 _ _ / _ _

_ _ / _ 1 Static White + DALI-2

_ _ / _ 3 Static White + 1-10V

_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8Z Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.

Main body: Aluminum.

Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W

Constant Voltage 24V

110-240V 50/60Hz

Packaging

1 Box 0,4 x 0,4 x 0,2 m

Vol 0,032 m³

Gross weight 3,75 Kg Net weight 2,5 Kg

Notes

2630 _ _ / _ 1: Static White + DALI-2

2630 _ _ / _ 3: Static White + 1-10V

2630 _ _ / 81: Tunable White + DALI-2 DT8


Bi-volt

Multi-volt

Multi-volt

LED ↓ IP20 CE UK ENE

2632



Finishes

- 15/ __ Grey L2 (NCS S 2500-N)
- 21/ __ Black Grey (NCS S 7000-N)

Finish customization
(Available options: Vibia colour palette.)

Minimum quantity 10 units. Price + 10%

LED Colour Temperature

Static White

/1 _ 2700 K - 2049 lm

/2 _ 3000 K - 2214 lm

/3 _ 3500 K - 2233 lm

Tunable White

/8 _ (2200 K - 4000 K) 1699 lm - 2188 lm

-

CRI >90

Control

2632 __ / __

__ / _ 1 Static White + DALI-2

__ / _ 3 Static White + 1-10V

__ / _ Z Static White + Casambi

__ / 81 Tunable White + DALI-2 DT8

__ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 15 W
Constant Voltage 24V
110-240V 50/60Hz

Packaging

1 Box 0,34 x 0,34 x 0,25 m
Vol 0,029 m³
Gross weight 4,35 Kg Net weight 2,9 Kg


Notes

2632 __ / _ 1: Static White + DALI-2

2632 __ / 81: Tunable White + DALI-2 DT8



2634



Finishes

- 15/ __ Grey L2 (NCS S 2500-N)
- 21/ __ Black Grey (NCS S 7000-N)

Finish customization
(Available options: Vibia colour palette.)

Minimum quantity 10 units. Price + 10%

LED Colour Temperature

Static White

/1 _ 2700 K - 4098 lm

/2 _ 3000 K - 4428 lm

/3 _ 3500 K - 4466 lm

Tunable White

/8 _ (2200 K - 4000 K) 3398 lm - 4376 lm

-

CRI >90

Control

2634 __ / __

__ / _ 1 Static White + DALI-2

__ / _ 3 Static White + 1-10V

__ / _ Z Static White + Casambi

__ / 81 Tunable White + DALI-2 DT8

__ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 30 W
Constant Voltage 24V
110-240V 50/60Hz

Packaging


1 Box 0,58 x 0,34 x 0,23 m
Vol 0,045 m³
Gross weight 5,85 Kg Net weight 3,9 Kg

Notes


2634 __ / _ 1: Static White + DALI-2

2634 __ / _ 3: Static White + 1-10V

2634 __ / 81: Tunable White + DALI-2 DT8



2640



Finishes

- 15/ __ Grey L2 (NCS S 2500-N)
- 21/ __ Black Grey (NCS S 7000-N)

Finish customization
(Available options: Vibia colour palette.)

Minimum quantity 10 units. Price + 10%

LED Colour Temperature

Static White

/1 _ 2700 K - 3047 lm

/2 _ 3000 K - 3292 lm

/3 _ 3500 K - 3320 lm

Tunable White

/8 _ (2200 K - 4000 K) 2519 lm - 3248 lm

-

CRI >90

Control

2640 __ / __

__ / _ 1 Static White + DALI-2

__ / _ 3 Static White + 1-10V

__ / _ Z Static White + Casambi

__ / 81 Tunable White + DALI-2 DT8

__ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
Constant Voltage 24V
110-240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,15 m³
Gross weight 8,25 Kg Net weight 5,5 Kg

Notes


2640 __ / _ 1: Static White + DALI-2

2640 __ / _ 3: Static White + 1-10V

* Electrical connection point.



2642



- Finishes**
- 15/ __ Grey L2 (NCS S 2500-N)
 - 21/ __ Black Grey (NCS S 7000-N)
- Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

- /1 _ 2700 K - 6147 lm
- /2 _ 3000 K - 6642 lm
- /3 _ 3500 K - 6699 lm

Tunable White

- /8 _ (2200 K - 4000 K) 5097 lm - 6564 lm

CRI >90

Control

2642 __ / __

- __ / _ 1 Static White + DALI-2
- __ / _ 3 Static White + 1-10V
- __ / _ Z Static White + Casambi
- __ / 81 Tunable White + DALI-2 DT8
- __ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
 Main body: Aluminum.
 Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 15 W
 1 x LED PLATE 24V 30 W
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging


1 Box 0,25 x 0,60 x 1,7 m
 Vol 0,255 m³
 Gross weight 11,25 Kg Net weight 7,5 Kg

Notes

2642 __ / _ 1: Static White + DALI-2 **Multi-volt**
 2642 __ / _ 3: Static White + 1-10V **Multi-volt**
 * Electrical connection point.

LED IP20 CE UK ENEC Bi-volt

2645



- Finishes**
- 15/ __ Grey L2 (NCS S 2500-N)
 - 21/ __ Black Grey (NCS S 7000-N)
- Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

- /1 _ 2700 K - 7145 lm
- /2 _ 3000 K - 7720 lm
- /3 _ 3500 K - 7786 lm

Tunable White

- /8 _ (2200 K - 4000 K) 5917 lm - 7624 lm

CRI >90

Control

2645 __ / __

- __ / _ 1 Static White + DALI-2
- __ / _ 3 Static White + 1-10V
- __ / _ Z Static White + Casambi
- __ / 81 Tunable White + DALI-2 DT8
- __ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
 Main body: Aluminum.
 Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
 1 x LED PLATE 24V 15 W
 1 x LED PLATE 24V 30 W
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging


1 Box 0,25 x 1,2 x 1,2 m
 Vol 0,42 m³
 Gross weight 14,25 Kg Net weight 9,25 Kg

Notes

2645 __ / _ 1: Static White + DALI-2 **Multi-volt**
 2645 __ / _ 3: Static White + 1-10V **Multi-volt**
 * Electrical connection point.

LED IP20 CE UK ENEC Bi-volt

2647



- Finishes**
- 15/ __ Grey L2 (NCS S 2500-N)
 - 21/ __ Black Grey (NCS S 7000-N)
- Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

- /1 _ 2700 K - 7145 lm
- /2 _ 3000 K - 7720 lm
- /3 _ 3500 K - 7786 lm

Tunable White

- /8 _ (2200 K - 4000 K) 5917 lm - 7624 lm

CRI >90

Control

2647 __ / __

- __ / _ 1 Static White + DALI-2
- __ / _ 3 Static White + 1-10V
- __ / _ Z Static White + Casambi
- __ / 81 Tunable White + DALI-2 DT8
- __ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
 Main body: Aluminum.
 Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
 1 x LED PLATE 24V 15 W
 1 x LED PLATE 24V 30 W
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging

1 Box 0,25 x 1,7 x 1,7 m
 Vol 0,72 m³
 Gross weight 15,3 Kg Net weight 10,2 Kg

Notes

2647 __ / _ 1: Static White + DALI-2 **Multi-volt**
 2647 __ / _ 3: Static White + 1-10V **Multi-volt**
 * Electrical connection point.

LED IP20 CE UK ENEC Bi-volt

Class

Design by Sebastian Herkner

A timeless and elegant solution for outdoor environments, Class combines the refined aesthetic of a patio light with the functional performance of a bollard. Consisting of a durable aluminum shaft and fluted glass diffuser, it washes the space with a gentle luminescence.

Outdoor



2810

28 x 250 cm



2815

28 x 250 cm



2800

22 x 78,5 cm



2805

22 x 78,5 cm



2820


18 x 60 cm



2825

18 x 96 cm

2800



Finishes

- 11/ __ Black (NCS S 8500-N)

LED Colour Temperature

/1_ 2700 K - 1188 lm



CRI >90

Control

2800 __ / __

__ / 11 DALI-2

__ / 15 Push

__ / 1Z_ 30 Casambi (Remote)

Materials

Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics


1 x LED 3,5W 150 mA
Constant Current 150 mA
220~240V. 50/60Hz

Packaging

2 Boxes
Box 1: 0,95 x 0,30 x 0,30 m
Box 2: 0,31 x 0,31 x 0,21 m
Total Vol 0,11 m³
Gross weight 11,6 Kg Net weight 9,6 Kg



2805



Finishes

- 11/ __ Black (NCS S 8500-N)

LED Colour Temperature

/1_ 2700 K - 2376 lm



CRI >90

Control

2805 __ / __

__ / 11 DALI-2

__ / 15 Push

__ / 1Z_ 30 Casambi (Remote)

Materials

Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics


2 x LED 3,5W 150 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging

2 Boxes
Box 1: 0,95 x 0,30 x 0,30 m
Box 2: 0,31 x 0,31 x 0,21 m
Total Vol 0,11 m³
Gross weight 14,8 Kg Net weight 12,8 Kg



2810



Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1_ 2700 K - 2376 lm

 CRI >90

Control

2810 __ / __
 __ / 11 DALI-2
 __ / 15 Push
 __ / 1Z_30 Casambi (Remote)

Materials

Body: Aluminum. Glass: Borosilicate glass.
 Diffuser: Opal PC- Polycarbonate.


Light Source and electronics

1 x LED 7W 300 mA
 Constant Current 300 mA
 220-240V. 50/60Hz

Packaging

2 Boxes
 Box 1: 2,92 x 0,32 x 0,32 m
 Box 2: 0,37 x 0,32 x 0,22 m
 Total Vol 0,33 m³
 Gross weight 20,5 Kg Net weight 17,5 Kg

2815



Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1_ 2700 K - 4752 lm

 CRI >90

Control

2815 __ / __
 __ / 11 DALI-2
 __ / 15 Push
 __ / 1Z_30 Casambi (Remote)

Materials

Body: Aluminum. Glass: Borosilicate glass.
 Diffuser: Opal PC- Polycarbonate.


Light Source and electronics

2 x LED 7W 300 mA
 Constant Current 600 mA
 220-240V. 50/60Hz

Packaging

2 Boxes
 Box 1: 2,92 x 0,32 x 0,32 m
 Box 2: 0,37 x 0,32 x 0,22 m
 Total Vol 0,33 m³
 Gross weight 28,4 Kg Net weight 25,4 Kg

2820



Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1_ 2700 K - 1188 lm

 CRI >90

Control

2820 __ / __
 __ / 11 DALI-2
 __ / 15 Push
 __ / 1Z_30 Casambi (Remote)

Materials

Body: Aluminum. Glass: Borosilicate glass.
 Diffuser: Opal PC- Polycarbonate.


Light Source and electronics

1 x LED 3,5W 150 mA
 Constant Current 150 mA
 220-240V. 50/60Hz

Packaging

1 Box 0,95 x 0,40 x 0,20 m
 Vol 0,08 m³
 Gross weight 4,4 Kg Net weight 2,9 Kg

2825



Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1_ 2700 K - 2376 lm

 CRI >90

Control

2825 __ / __
 __ / 11 DALI-2
 __ / 15 Push
 __ / 1Z_30 Casambi (Remote)

Materials

Body: Aluminum. Glass: Borosilicate glass.
 Diffuser: Opal PC- Polycarbonate.

Light Source and electronics

1 x LED 7W 300 mA
 Constant Current 300 mA
 220-240V. 50/60Hz

Packaging

1 Box 0,95 x 0,30 x 0,30 m
 Vol 0,09 m³
 Gross weight 6,4 Kg Net weight 4,40 Kg

Dama

Design by Ludovica+Roberto Palomba


Dama is a homage to the classic lamp, ideal for shaping an intimate atmosphere with an elevated aesthetic.

Combining technical quality with a layer of warmth and intimacy, the collection connects the charm of tradition with the finesse of contemporary lighting design.

Table Floor Pendant



3225



- Finishes
- 11/ __ Black (NCS S 8500-N)
 - 25/ __ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1_ 2700 K - 2170 lm
E
CRI >90

Control

3225 __ / __

- __ / 15 Push
- __ / 1Z Casambi
- __ / 1Y ProtoPixel*

Materials

Tube: Steel.
Base: Zinc Alloy.
Shade: Paper.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V. 50/60Hz

Packaging


1 Box 0,75 x 0,55 x 0,55 m
Vol 0,23 m³
Gross weight 3,3 Kg Net weight 1,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Switch on the cable. Electric cable 2,5 m.

LED IP20 CE UK ENEC

3230

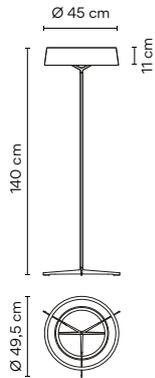

- Finishes
- 11/ __ Black (NCS S 8500-N)
 - 25/ __ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
 /1 _ 2700 K - 2170 lm
 E →
 CRI >90

Control

3230 __ / __
 __ / 15 Push
 __ / 1Z Casambi
 __ / 1Y ProtoPixel*

Materials

Tube: Steel.
 Base: Zinc Alloy.
 Shade: Paper.

Light Source and electronics
 1 x LED STRIP 16,7 W 900 mA
 Constant Voltage 24V
 100-240V. 50/60Hz

Packaging


1 Box 1,6 x 0,55 x 0,55 m
 Vol 0,48 m³
 Gross weight 5 Kg Net weight 2,55 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
 Switch on the cable. Electric cable 2,5 m.



3235



- Finishes
- 11/ __ Black (NCS S 8500-N)
 - 25/ __ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
 /1 _ 2700 K - 2170 lm
 E →
 CRI >90

Control

3235 __ / __
 __ / 11 DALI-2
 __ / 1B Push; 1-10V
 __ / 1Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

_10 Surface
 _18 Free Wire
 _23 Built-in XS
 _31 Remote Micro
 _32 Remote XXS

Materials

Body: Aluminum.
 Shade: Paper.

Light Source and electronics
 1 x LED STRIP 16,7 W 900 mA
 Constant Current 900 mA
 110-240V. 50/60Hz

Packaging

1 Box 0,40 x 0,55 x 0,55 m
 Vol 0,12 m³
 Gross weight 3,2 Kg Net weight 1,6 Kg

Notes

Extra cable length. 16,00 €/m



⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 3235

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 17,3 cm

match with fixture finish.

_18
Free Wire



1 wire

Ø 20 cm



2 wires

Ø 22 cm



3 - 6 wires

Ø 36 cm




7 - 8 wires


Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in





Circle

Combining accent, diffuse and general lighting effects with dynamic control and temperature regulation, Circle is a highly-functional complementary product designed to curate a nuanced ambience.

Ceiling - Accent Downlight - Colour



Ø 7 cm

Trim

3300 Narrow
3303 Medium
3306 Wide



Ø 6 cm

Trimless

3310 Narrow
3313 Medium
3316 Wide



Ø 11 cm

Trim

3320 Narrow
3323 Medium
3326 Wide



Ø 10 cm

Trimless

3330 Narrow
3333 Medium
3336 Wide

Ceiling - Accent Downlight - Wood



Ø 7 cm

Trim

3300 Narrow
3303 Medium
3306 Wide



Ø 6 cm

Trimless

3310 Narrow
3313 Medium
3316 Wide



Ø 11 cm

Trim

3320 Narrow
3323 Medium
3326 Wide




Ø 10 cm

Trimless

3330 Narrow
3333 Medium
3336 Wide

3300
TRIM Narrow
3303
TRIM Medium
3306
TRIM Wide



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **23/** _ _ Warm White (NCS S 0502-Y50R)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)

- LED Colour Temperature**
- Static White**
- /1 _ 2700 K - 607 lm
 - /2 _ 3000 K - 634 lm
 - /3 _ 3500 K - 657 lm

- Tunable White**
- /8 _ (1800 K - 4000 K) 308 lm - 504 lm

- Dim-To-Warm**
- /F _ (1800 K - 3000 K) 611 lm

F →
 CRI >90

- Control**
- 3300** _ _ / _ _
 - 3303** _ _ / _ _
 - 3306** _ _ / _ _

- _ _ / _ **O** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

- _ _ / **F1** Dim-To-Warm + DALI-2
- _ _ / **FB** Dim-To-Warm + Push; 1-10V
- _ _ / **FM** Dim-To-Warm + Without driver
- _ _ / **FZ** Dim-To-Warm + Casambi

- Finishes**
- **82/** _ _ White oak
 - **83/** _ _ American walnut

- LED Colour Temperature**
- Static White**
- /1 _ 2700 K - 607 lm
 - /2 _ 3000 K - 634 lm
 - /3 _ 3500 K - 657 lm

- Tunable White**
- /8 _ (1800 K - 4000 K) 308 lm - 504 lm

- Dim-To-Warm**
- /F _ (1800 K - 3000 K) 611 lm

F →
 CRI >90

- Control**
- 3300** _ _ / _ _
 - 3303** _ _ / _ _
 - 3306** _ _ / _ _

- _ _ / _ **O** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

- _ _ / **F1** Dim-To-Warm + DALI-2
- _ _ / **FB** Dim-To-Warm + Push; 1-10V
- _ _ / **FM** Dim-To-Warm + Without driver
- _ _ / **FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
 Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 6,2 W 350 mA
 Constant Current 350 mA
 220-240V 50/60Hz

Tunable White:
 1 x LED 5,5 W 150 mA
 Constant Current 150 mA
 220-240V 50/60Hz

Dim-To-Warm:
 1 x LED 5,8 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz


Packaging

1 Box 0,15 x 0,15 x 0,15 m
 Vol 0,003 m³
 Gross weight 0,5 Kg Net weight 0,33 Kg


Notes

- 3300 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**
- 3300 _ _ / FB: Dim-To-Warm + Push; 1-10V **Bi-volt**
- 3303 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**
- 3303 _ _ / FB: Dim-To-Warm + Push; 1-10V **Bi-volt**
- 3306 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**
- 3306 _ _ / FB: Dim-To-Warm + Push; 1-10V **Bi-volt**

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

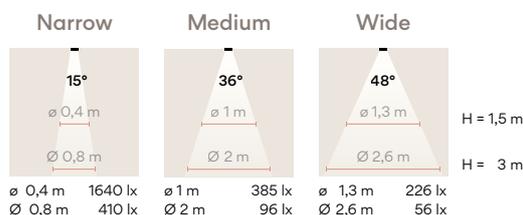

3310
TRIMLESS Narrow
3313
TRIMLESS Medium
3316
TRIMLESS Wide



Ø 6 cm

- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **23/** __ Warm White (NCS S 0502-Y50R)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

- Static White**
- /1** _ 2700 K - 607 lm
 - /2** _ 3000 K - 634 lm
 - /3** _ 3500 K - 657 lm

- Tunable White**
- /8** _ (1800 K - 4000 K) 308 lm - 504 lm

- Dim-To-Warm**
- /F** _ (1800 K - 3000 K) 611 lm

F
CRI >90

Control

- 3310** __ / __
3313 __ / __
3316 __ / __

- __ / **O** Static White + On/ Off
- __ / **D** Static White + Push, DALI-2
- __ / **M** Static White + Without driver
- __ / **Z** Static White + Casambi

- __ / **81** Tunable White + DALI-2 DT8
- __ / **8M** Tunable White + Without driver
- __ / **8Z** Tunable White + Casambi

- __ / **F1** Dim-To-Warm + DALI-2
- __ / **FB** Dim-To-Warm + Push; 1-10V
- __ / **FM** Dim-To-Warm + Without driver
- __ / **FZ** Dim-To-Warm + Casambi

- Finishes**
- **82/** __ White oak
 - **83/** __ American walnut

LED Colour Temperature

- Static White**
- /1** _ 2700 K - 607 lm
 - /2** _ 3000 K - 634 lm
 - /3** _ 3500 K - 657 lm

- Tunable White**
- /8** _ (1800 K - 4000 K) 308 lm - 504 lm

- Dim-To-Warm**
- /F** _ (1800 K - 3000 K) 611 lm

F
CRI >90

Control

- 3310** __ / __
3313 __ / __
3316 __ / __

- __ / **O** Static White + On/ Off
- __ / **D** Static White + Push, DALI-2
- __ / **M** Static White + Without driver
- __ / **Z** Static White + Casambi

- __ / **81** Tunable White + DALI-2 DT8
- __ / **8M** Tunable White + Without driver
- __ / **8Z** Tunable White + Casambi

- __ / **F1** Dim-To-Warm + DALI-2
- __ / **FB** Dim-To-Warm + Push; 1-10V
- __ / **FM** Dim-To-Warm + Without driver
- __ / **FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,2 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
220-240V 50/60Hz

Dim-To-Warm:
1 x LED 5,8 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,002 m³
Gross weight 0,6 Kg Net weight 0,43 Kg

Notes


- 3310 __ / F1: Dim-To-Warm + DALI-2 Bi-volt
- 3310 __ / FB: Dim-To-Warm + Push; 1-10V Bi-volt
- 3313 __ / F1: Dim-To-Warm + DALI-2 Bi-volt
- 3313 __ / FB: Dim-To-Warm + Push; 1-10V Bi-volt
- 3316 __ / F1: Dim-To-Warm + DALI-2 Bi-volt
- 3316 __ / FB: Dim-To-Warm + Push; 1-10V Bi-volt

Trimless frame can be shipped beforehand.


Visit vibia.com to group several pieces with just one electrical point, only for Static White.



Ø 7 cm

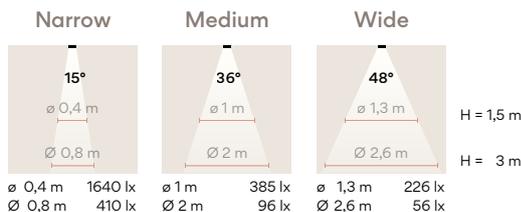

3320
TRIM Narrow
3323
TRIM Medium
3326
TRIM Wide



- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **23/** __ Warm White (NCS S 0502-Y50R)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
 /1 _ 2700 K - 1256 lm
 /2 _ 3000 K - 1313 lm
 /3 _ 3500 K - 1360 lm

Tunable White
 /8 _ (1800 K - 4000 K)
 571 lm - 895 lm

Dim-To-Warm
 /F _ (1800 K - 3000 K)
 1258 lm

F

CRI >90

Control

3320 __ / __
3323 __ / __
3326 __ / __

__ / **O** Static White + On/ Off
 __ / **D** Static White + Push, DALI-2
 __ / **M** Static White + Without driver
 __ / **Z** Static White + Casambi

__ / **81** Tunable White + DALI-2 DT8
 __ / **8M** Tunable White + Without driver
 __ / **8Z** Tunable White + Casambi

__ / **F1** Dim-To-Warm + DALI-2
 __ / **FB** Dim-To-Warm + Push; 1-10V
 __ / **FM** Dim-To-Warm + Without driver
 __ / **FZ** Dim-To-Warm + Casambi

- Finishes**
- **82/** __ White oak
 - **83/** __ American walnut

LED Colour Temperature

Static White
 /1 _ 2700 K - 1256 lm
 /2 _ 3000 K - 1313 lm
 /3 _ 3500 K - 1360 lm

Tunable White
 /8 _ (1800 K - 4000 K)
 571 lm - 895 lm

Dim-To-Warm
 /F _ (1800 K - 3000 K)
 1258 lm

F

CRI >90

Control

3320 __ / __
3323 __ / __
3326 __ / __

__ / **O** Static White + On/ Off
 __ / **D** Static White + Push, DALI-2
 __ / **M** Static White + Without driver
 __ / **Z** Static White + Casambi

__ / **81** Tunable White + DALI-2 DT8
 __ / **8M** Tunable White + Without driver
 __ / **8Z** Tunable White + Casambi

__ / **F1** Dim-To-Warm + DALI-2
 __ / **FB** Dim-To-Warm + Push; 1-10V
 __ / **FM** Dim-To-Warm + Without driver
 __ / **FZ** Dim-To-Warm + Casambi

Materials
 Body: Aluminum.
 Shade: PC- Polycarbonate/ Wood.

Light Source and electronics
2700 K - 3000 K - 3500K:
 1 x LED 12,4 W 700 mA
 Constant Current 700 mA
 220~240V 50/60Hz
Tunable White:
 1 x LED 8,9 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz
Dim-To-Warm:
 1 x LED 11,6 W 350 mA
 Constant Current 350 mA
 110~240V 50/60Hz

Packaging
 1 Box 0,15 x 0,15 x 0,15 m
 Vol 0,003 m³
 Gross weight 0,6 Kg Net weight 0,4 Kg

Notes

3320 __ / F1: Dim-To-Warm + DALI-2

3320 __ / FB: Dim-To-Warm + Push; 1-10V


3323 __ / F1: Dim-To-Warm + DALI-2

3323 __ / FB: Dim-To-Warm + Push; 1-10V

3326 __ / F1: Dim-To-Warm + DALI-2

3326 __ / FB: Dim-To-Warm + Push; 1-10V

Trimless frame can be shipped beforehand.
 Visit vibia.com to group several pieces with just one electrical point, only for Static White.

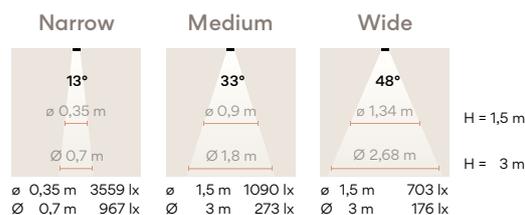

3330
TRIMLESS Narrow

3333
TRIMLESS Medium

3336
TRIMLESS Wide

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White

- /1** _ 2700 K - 1256 lm
- /2** _ 3000 K - 1313 lm
- /3** _ 3500 K - 1360 lm

Tunable White

- /8** _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm

- /F** _ (1800 K - 3000 K) 1258 lm

F

CRI >90

Control

3330 _ / _ _

3333 _ / _ _

3336 _ / _ _

_ _ / _ **O** Static White + On/ Off

_ _ / _ **D** Static White + Push, DALI-2

_ _ / _ **M** Static White + Without driver

_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8

_ _ / **8M** Tunable White + Without driver



_ _ / **8Z** Tunable White + Casambi

_ _ / **F1** Dim-To-Warm + DALI-2

_ _ / **FB** Dim-To-Warm + Push; 1-10V

_ _ / **FM** Dim-To-Warm + Without driver

_ _ / **FZ** Dim-To-Warm + Casambi



Ø 10 cm

Finishes

- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

Static White

- /1** _ 2700 K - 1256 lm
- /2** _ 3000 K - 1313 lm
- /3** _ 3500 K - 1360 lm

Tunable White

- /8** _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm

- /F** _ (1800 K - 3000 K) 1258 lm

F

CRI >90

Control

3330 _ / _ _

3333 _ / _ _

3336 _ / _ _

_ _ / _ **O** Static White + On/ Off

_ _ / _ **D** Static White + Push, DALI-2

_ _ / _ **M** Static White + Without driver

_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8

_ _ / **8M** Tunable White + Without driver

_ _ / **8Z** Tunable White + Casambi

_ _ / **F1** Dim-To-Warm + DALI-2

_ _ / **FB** Dim-To-Warm + Push; 1-10V

_ _ / **FM** Dim-To-Warm + Without driver

_ _ / **FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
 Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 12,4 W 700 mA
 Constant Current 700 mA
 220-240V 50/60Hz

Tunable White:
 1 x LED 8,9 W 500 mA
 Constant Current 500 mA
 220-240V 50/60Hz

Dim-To-Warm:
 1 x LED 11,6 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,002 m³
 Gross weight 0,75 Kg Net weight 0,55 Kg

Notes

3330 _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**

3330 _ / FB: Dim-To-Warm + Pulsador; 1-10V **Bi-volt**

3333 _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**

3333 _ / FB: Dim-To-Warm + Pulsador; 1-10V **Bi-volt**


3336 _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**

3336 _ / FB: Dim-To-Warm + Pulsador; 1-10V **Bi-volt**

Trimless frame can be shipped beforehand.
 Visit vibia.com to group several pieces with just one electrical point, only for Static White.



Ø 11 cm

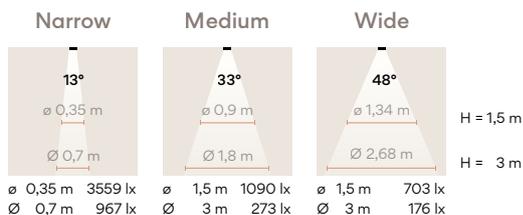



Ceiling - Wall Washer



Ø 11 cm


3350



Ø 10 cm

3353

3350 TRIM



Ø 11 cm

Finishes

- 11/ _ _ Black (NCS S 8500-N)
- 23/ _ _ Warm White (NCS S 0502-Y50R)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

- Static White**
- /1_ 2700 K - 914 lm
 - /2_ 3000 K - 956 lm
 - /3_ 3500 K - 990 lm
- Tunable White**
- /8_ (1800 K - 4000 K) 571 lm - 895 lm
- Dim-To-Warm**
- /F_ (1800 K - 3000 K) 1258 lm
- CRI >90

Control

- 3350 _ _ / _ _
-
- _ _ / _ 0 Static White + On/ Off
 - _ _ / _ D Static White + Push, DALI-2
 - _ _ / _ M Static White + Without driver
 - _ _ / _ Z Static White + Casambi
-
- _ _ / 81 Tunable White + DALI-2 DT8
 - _ _ / 8M Tunable White + Without driver
 - _ _ / 8Z Tunable White + Casambi
-
- _ _ / F1 Dim-To-Warm + DALI-2
 - _ _ / FB Dim-To-Warm + Push; 1-10V
 - _ _ / FM Dim-To-Warm + Without driver
 - _ _ / FZ Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,4 W 300 mA
Constant Current 300 mA
220-240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz


Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging


1 Box 0,15 x 0,15 x 0,1 m
Vol 0,002 m³
Gross weight 0,6 Kg Net weight 0,4 Kg

Notes

3350 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**
3350 _ _ / FB: Dim-To-Warm + Pulsador; 1-10V **Bi-volt**
Visit vibia.com to group several pieces with just one electrical point, only for Static White.

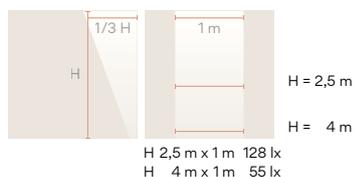

3353
TRIMLESS



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **23/** _ _ Warm White (NCS S 0502-Y50R)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)

- LED Colour Temperature**
- Static White**
- /1** _ 2700 K - 914 lm
 - /2** _ 3000 K - 956 lm
 - /3** _ 3500 K - 990 lm
- Tunable White**
- /8** _ (1800 K - 4000 K) 571 lm - 895 lm
- Dim-To-Warm**
- /F** _ (1800 K - 3000 K) 1258 lm
- CRI >90**

- Control**
- 3353** _ _ / _ _
-
- _ _ / _ **O** Static White + On/ Off
 - _ _ / _ **D** Static White + Push, DALI-2
 - _ _ / _ **M** Static White + Without driver
 - _ _ / _ **Z** Static White + Casambi
-
- _ _ / **81** Tunable White + DALI-2 DT8
 - _ _ / **8M** Tunable White + Without driver
 - _ _ / **8Z** Tunable White + Casambi
-
- _ _ / **F1** Dim-To-Warm + DALI-2
 - _ _ / **FB** Dim-To-Warm + Push; 1-10V
 - _ _ / **FM** Dim-To-Warm + Without driver
 - _ _ / **FZ** Dim-To-Warm + Casambi

Materials
 Body: Aluminum.
 Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 6 W 300 mA
 Constant Current 300 mA
 220-240V 50/60Hz

Tunable White:
 1 x LED 8,9 W 500 mA
 Constant Current 500 mA
 220-240V 50/60Hz

Dim-To-Warm:
 1 x LED 11,6 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,006 m³
 Gross weight 0,6 Kg Net weight 0,4 Kg


Notes

3353 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**

3353 _ _ / FB: Dim-To-Warm + Pulsador; 1-10V **Bi-volt**

Trimless frame can be shipped beforehand.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

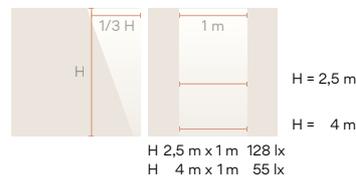

Ceiling - Flat Diffuser



Ø 36 cm


3360



Ø 47 cm

3363

3360



Ø 36 cm

- Finishes**
- 11/ __ Black (NCS S 8500-N)
 - 23/ __ Warm White (NCS S 0502-Y50R)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
- LED Colour Temperature**
- Static White**
- /1_ 2700 K - 1800 lm
 - /2_ 3000 K - 1890 lm
 - /3_ 3500 K - 1926 lm
- Tunable White**
- /8_ (2200 K - 4000 K) 1607 lm - 2186 lm
- CRI >90

- Control**
- 3360 __ / __
-
- __ / __ O Static White + On/ Off
 - __ / __ D Static White + Push, DALI-2
 - __ / __ M Static White + Without driver
 - __ / __ Z Static White + Casambi
-
- __ / 81 Tunable White + DALI-2 DT8
 - __ / 8M Tunable White + Without driver
 - __ / 8Z Tunable White + Casambi

Materials
 Body: Aluminum. Diffuser:PMMA.
 Shade: PC-Polycarbonate.

Light Source and electronics
2700 K - 3000 K - 3500K:
 1 x LED PLATE 17,4 W 500 mA
 Constant Current 500 mA
 220-240V 50/60Hz

Tunable White:
 1 x LED PLATE 17,1 W 500 mA
 Constant Current 500 mA
 220-240V 50/60Hz


Packaging
 1 Box 0,48 x 0,48 x 0,12 m
 Vol 0,03 m³
 Gross weight 2,4 Kg Net weight 2 Kg

Notes
 Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UK ENE

Ø 35 cm

3363



Ø 47 cm

- Finishes**
- 11/ __ Black (NCS S 8500-N)
 - 23/ __ Warm White (NCS S 0502-Y50R)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
- LED Colour Temperature**
- Static White**
- /1_ 2700 K - 2798 lm
 - /2_ 3000 K - 2938 lm
 - /3_ 3500 K - 2994 lm
- Tunable White**
- /8_ (2200 K - 4000 K) 2471 lm - 3198 lm
- CRI >90

- Control**
- 3363 __ / __
-
- __ / __ O Static White + On/ Off
 - __ / __ A Static White + Push; 1-10V; DALI-2
 - __ / __ M Static White + Without driver
 - __ / __ Z Static White + Casambi
-
- __ / 81 Tunable White + DALI-2 DT8
 - __ / 8M Tunable White + Without driver
 - __ / 8Z Tunable White + Casambi

Materials
 Body: Aluminum. Diffuser:PMMA.
 Shade: PC-Polycarbonate.

Light Source and electronics
2700 K - 3000 K - 3500K:
 1 x LED PLATE 25,6 W 550 mA
 Constant Current 550 mA
 220-240V 50/60Hz

Tunable White:
 1 x LED PLATE 25,8 W 650 mA
 Constant Current 650 mA
 220-240V 50/60Hz

Packaging
 1 Box 0,68 x 0,68 x 0,12 m
 Vol 0,055 m³
 Gross weight 3,4 Kg Net weight 2,9 Kg

Notes
 3363 __ / __ A: Push; 1-10V; DALI-2 **Bi-volt**

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UK ENE

Ø 46 cm



Line

Line consists of a series of simple linear luminaires, each with a distinct lighting effect. Integrating dynamic control and subtle gradients in intensity, tone and colour, the collection complements Vibia's wider product range to curate a subtle atmosphere.

Ceiling - High Comfort Diffuser



3500 Trim
14 x 4 cm



3503 Trimless
13 x 3 cm



3505 Trim
27 x 4 cm



3508 Trimless
26 x 3 cm



3510 Trim
53 x 4 cm



3513 Trimless
51 x 3 cm




3515 Trim
104 x 4 cm




3518 Trimless
102 x 3 cm


TRIM



TRIMLESS



3500
TRIM
UGR <21



Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 11/ __ Black (NCS S 8500-N) ● 23/ __ Warm White (NCS S 0502-Y50R) 	<p>Static White</p> <ul style="list-style-type: none"> /1 _ 2700 K - 897 lm /2 _ 3000 K - 928 lm /3 _ 3500 K - 960 lm <p>▶ E</p> <p>Tunable White</p> <ul style="list-style-type: none"> /8 _ (2200 K - 4000 K) 642 lm - 701 lm <p>▶ F</p> <p>CRI >90</p>	<p>3500 __ / __</p> <hr/> <ul style="list-style-type: none"> __ / _ O Static White + On/ Off __ / _ D Static White + Push, DALI-2 __ / _ M Without driver __ / _ Z Static White + Casambi <hr/> <ul style="list-style-type: none"> __ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 0,5 Kg Net weight 0,35 Kg

Notes


For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.

LED □ IP20 CE UK ENE E

△ 13,5 x 3,5 cm

3503
TRIMLESS
UGR <21



Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 11/ __ Black (NCS S 8500-N) ● 23/ __ Warm White (NCS S 0502-Y50R) 	<p>Static White</p> <ul style="list-style-type: none"> /1 _ 2700 K - 897 lm /2 _ 3000 K - 928 lm /3 _ 3500 K - 960 lm <p>▶ E</p> <p>Tunable White</p> <ul style="list-style-type: none"> /8 _ (2200 K - 4000 K) 642 lm - 701 lm <p>▶ F</p> <p>CRI >90</p>	<p>3503 __ / __</p> <hr/> <ul style="list-style-type: none"> __ / _ O Static White + On/ Off __ / _ D Static White + Push, DALI-2 __ / _ M Without driver __ / _ Z Static White + Casambi <hr/> <ul style="list-style-type: none"> __ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Vol 0,006 m³
Gross weight 0,825kg Net weight 0,525 kg

Notes

Trimless frame can be shipped in advance under request.


For Tunable White versions, remote driver only required.

For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.

LED □ IP20 CE UK ENE E

△ 14,5 x 4 cm

3505
 TRIM
 UGR <21


Finishes

- **11/** __ Black
(NCS S 8500-N)
- **23/** __ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

- Static White**
- /1** _ 2700 K - 1674 lm
- /2** _ 3000 K - 1733 lm
- /3** _ 3500 K - 1791 lm



Tunable White

- /8** _ (2200 K - 4000 K)
1221 lm - 1343 lm



CRI >90

Control

3505 __ / __

- __ / _ **O** Static White + On/ Off
- __ / _ **D** Static White + Push, DALI-2
- __ / _ **M** Without driver
- __ / _ **Z** Static White + Casambi

- __ / **81** Tunable White + DALI-2 DT8
- __ / **8M** Tunable White + Without driver
- __ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
 Shade: PC- Polycarbonate & Bronze.
 Diffuser: PE- Polyethylene.
 Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 13,7 W 650 mA
 Constant Current 650 mA
 220-240V 50/60Hz

Tunable White:

1 x LED STRIP 13,7 W
 Constant Voltage 24VDC
 220-240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
 Vol 0,003 m³
 Gross weight 0,65 Kg Net weight 0,45 Kg


Notes

For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.



26,2 x 3,5 cm

3508
 TRIMLESS
 UGR <21


Finishes

- **11/** __ Black
(NCS S 8500-N)
- **23/** __ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

- Static White**
- /1** _ 2700 K - 1674 lm
- /2** _ 3000 K - 1733 lm
- /3** _ 3500 K - 1791 lm



Tunable White

- /8** _ (2200 K - 4000 K)
1221 lm - 1343 lm



CRI >90

Control

3508 __ / __

- __ / _ **O** Static White + On/ Off
- __ / _ **D** Static White + Push, DALI-2
- __ / _ **M** Without driver
- __ / _ **Z** Static White + Casambi

- __ / **81** Tunable White + DALI-2 DT8
- __ / **8M** Tunable White + Without driver
- __ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
 Shade: PC- Polycarbonate & Bronze.
 Diffuser: PE- Polyethylene.
 Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 13,7 W 650 mA
 Constant Current 650 mA
 220-240V 50/60Hz

Tunable White:

1 x LED STRIP 13,7 W
 Constant Voltage 24VDC
 220-240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,006 m³
 Gross weight 1,05 Kg Net weight 0,75 Kg

Notes

Trimless frame can be shipped in advance under request.


For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.



27 x 4 cm

3510
 TRIM
 UGR <21

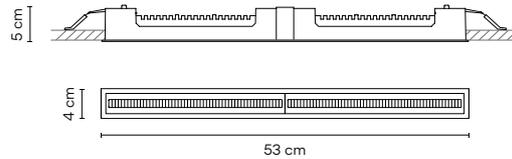

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	Static White /1 _ 2700 K - 3348 lm	3510 __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	/2 _ 3000 K - 3466 lm	__ / O Static White + On/ Off
	/3 _ 3500 K - 3582 lm	__ / A Static White + Push; 1-10V; DALI-2
	Tunable White /8 _ (2200 K - 4000 K) 2442 lm - 2686 lm	__ / M Static White + Without driver
	E >	__ / Z Static White + Casambi
	F >	__ / 81 Tunable White + DALI-2 DT8
	CRI >90	__ / 8M Tunable White + Without driver
		__ / 8Z Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
 Shade: PC- Polycarbonate & Bronze.
 Diffuser: PE- Polyethylene.
 Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 27,4 W 650 mA
 Constant Current 650 mA
 220~240V 50/60Hz

Tunable White:

1 x LED STRIP 27,4 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,570 m
 Vol 0,005 m³
 Gross weight 1,25 Kg Net weight 0,78 Kg

Notes

3510 __ / _ A: Push; 1-10V; DALI-2 **Bi-volt**


For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.



52 x 3,5 cm

3513
 TRIMLESS
 UGR <21

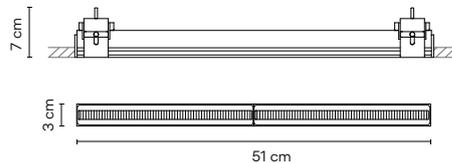

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	Static White /1 _ 2700 K - 3348 lm	3513 __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	/2 _ 3000 K - 3466 lm	__ / O Static White + On/ Off
	/3 _ 3500 K - 3582 lm	__ / A Static White + Push; 1-10V; DALI-2
	Tunable White /8 _ (2200 K - 4000 K) 2442 lm - 2686 lm	__ / M Static White + Without driver
	E >	__ / Z Static White + Casambi
	F >	__ / 81 Tunable White + DALI-2 DT8
	CRI >90	__ / 8M Tunable White + Without driver
		__ / 8Z Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
 Shade: PC- Polycarbonate & Bronze.
 Diffuser: PE- Polyethylene.
 Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 27,4 W 650 mA
 Constant Current 650 mA
 220~240V 50/60Hz

Tunable White:

1 x LED STRIP 27,4 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,010 m³
 Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

3513 __ / _ A: Push; 1-10V; DALI-2 **Bi-volt**


Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.



53 x 4 cm

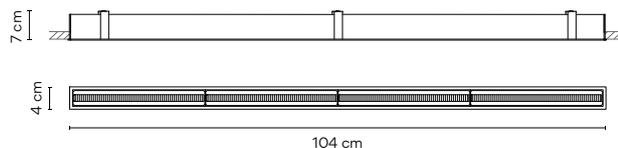3515
 TRIM
 UGR <21


Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	Static White /1_ 2700 K - 6696 lm	3515 __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	/2_ 3000 K - 6932 lm /3_ 3500 K - 7164 lm E	__ / O Static White + On/ Off __ / A Static White + Push; 1-10V; DALI-2
	Tunable White /8_ (2200 K - 4000 K) 4884 lm - 5372 lm F	__ / M Static White + Without driver __ / Z Static White + Casambi
	CRI >90	__ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
 Shade: PC- Polycarbonate & Bronze.
 Diffuser: PE- Polyethylene.
 Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 54,8 W 650 mA
 Constant Current 650 mA
 220~240V 50/60Hz

Tunable White:
 1 x LED STRIP 54,7 W
 Constant Voltage 24VDC
 220~240V 50/60Hz


Packaging

1 Box 0,105 x 0,08 x 1,095 m
 Vol 0,009 m³
 Gross weight 3,25 Kg Net weight 2,36 Kg

Notes

3515 __ / __ O: On/ Off **Bi-volt**
 3515 __ / __ A: Push; 1-10V; DALI-2 **Bi-volt**
 For Tunable White versions, a grouping driver
 is recommended.

LED IP20 CE UK ENEC
 103 x 3,5 cm

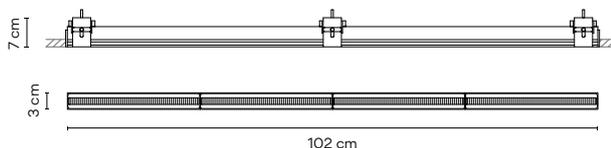3518
 TRIMLESS
 UGR <21


Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	Static White /1_ 2700 K - 6696 lm	3518 __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	/2_ 3000 K - 6932 lm /3_ 3500 K - 7164 lm E EPREL	__ / O Static White + On/ Off __ / A Static White + Push; 1-10V; DALI-2
	Tunable White /8_ (2200 K - 4000 K) 4884 lm - 5372 lm F EPREL	__ / M Static White + Without driver __ / Z Static White + Casambi
	CRI >90	__ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
 Shade: PC- Polycarbonate & Bronze.
 Diffuser: PE- Polyethylene.
 Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 54,8 W 650 mA
 Constant Current 650 mA
 220~240V 50/60Hz

Tunable White:
 1 x LED STRIP 54,7 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,018 m³
 Gross weight 3,35 kg Net weight 2,46 Kg

Notes

3518 __ / __ O: On/ Off **Bi-volt**
 3518 __ / __ A: Push; 1-10V; DALI-2 **Bi-volt**
 Trimless frame can be shipped in advance under request.
 For Tunable White versions, a grouping driver
 is recommended.

LED IP20 CE UK ENEC
 104 x 4 cm



Ceiling - Flat Diffuser



3530 Trim
53 x 4 cm



3533 Trimless
51 x 3 cm



3535 Trim
103 x 4 cm



3538 Trimless
102 x 3 cm




3540 Trim
203 x 4 cm




3543 Trimless
202 x 3 cm


TRIM



TRIMLESS



3530
TRIM

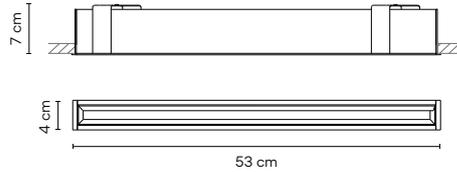

Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 11/ __ Black (NCS S 8500-N) ● 23/ __ Warm White (NCS S 0502-Y50R) 	<p>Static White</p> <ul style="list-style-type: none"> /1 _ 2700 K - 1272 lm /2 _ 3000 K - 1314 lm /3 _ 3500 K - 1356 lm <p>Tunable White</p> <ul style="list-style-type: none"> /8 _ (2200 K - 4000 K) 875 lm - 1197 lm <p>E →</p> <p>CRI >90</p>	<p>3530 __ / __</p> <hr/> <ul style="list-style-type: none"> __ / _ O Static White + On/ Off __ / _ A Static White + Push; 1-10V; DALI-2 __ / _ M Static White + Without driver __ / _ Z Static White + Casambi <hr/> <ul style="list-style-type: none"> __ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi

Materials
 Body: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics
2700 K - 3000 K - 3500K:
 1 x LED STRIP 24V 10,3 W
 Constant Voltage 24VDC
 220~240V 50/60Hz
Tunable White:
 1 x LED STRIP 10,3 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging
 1 Box 0,105 x 0,08 x 0,570 m
 Vol 0,005 m³
 Gross weight 1,25 Kg Net weight 0,78 Kg

Notes
 3530 __ / _ A: Static White + Push; 1-10V; DALI-2 **Multi-volt**

For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.

LED **IP20** **CE** **UK** **ERC** **52 x 3,5 cm**

3533
TRIMLESS



Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 11/ __ Black (NCS S 8500-N) ● 23/ __ Warm White (NCS S 0502-Y50R) 	<p>Static White</p> <ul style="list-style-type: none"> /1 _ 2700 K - 1272 lm /2 _ 3000 K - 1314 lm /3 _ 3500 K - 1356 lm <p>Tunable White</p> <ul style="list-style-type: none"> /8 _ (2200 K - 4000 K) 875 lm - 1197 lm <p>E →</p> <p>CRI >90</p>	<p>3533 __ / __</p> <hr/> <ul style="list-style-type: none"> __ / _ O Static White + On/ Off __ / _ A Static White + Push; 1-10V; DALI-2 __ / _ M Static White + Without driver __ / _ Z Static White + Casambi <hr/> <ul style="list-style-type: none"> __ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi

Materials
 Body: Aluminum.
 Diffuser: PC- Polycarbonate.
 Trimless frame: Aluminum.

Light Source and electronics
2700 K - 3000 K - 3500K:
 1 x LED STRIP 24V 10,3 W
 Constant Voltage 24VDC
 220~240V 50/60Hz
Tunable White:
 1 x LED STRIP 10,3 W
 Constant Voltage 24VDC
 220~240V 50/60Hz


Packaging
 2 Boxes
 Total Vol 0,010 m³
 Gross weight 2,1 Kg Net weight 1,32 Kg

Notes
 3533 __ / _ O: Static White + On/ Off **Multi-volt**
 3533 __ / _ A: Static White + Push; 1-10V; DALI-2 **Multi-volt**

For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.

LED **IP20** **CE** **UK** **ERC** **53 x 4 cm**

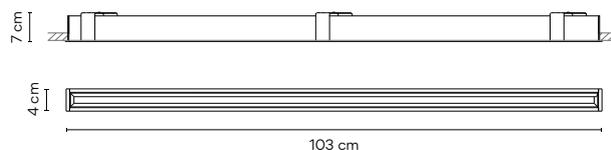3535
TRIM

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	Static White	3535 _ _ / _ _
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/1 _ 2700 K - 2544 lm	_ _ / _ O Static White + On/ Off
	/2 _ 3000 K - 2628 lm	_ _ / _ A Static White + Push; 1-10V; DALI-2
	/3 _ 3500 K - 2712 lm	_ _ / _ M Static White + Without driver
	Tunable White	_ _ / _ Z Static White + Casambi
	/8 _ (2200 K - 4000 K) 1751 lm - 2395 lm	
	E →	
	CRI >90	_ _ / 81 Tunable White + DALI-2 DT8
		_ _ / 8M Tunable White + Without driver
		_ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED STRIP 24V 20,6 W
Constant Voltage 24VDC
220-240V 50/60Hz

Tunable White:

1 x LED STRIP 20,6 W
Constant Voltage 24VDC
220-240V 50/60Hz


Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009 m³
Gross weight 3,25 Kg Net weight 2,36 Kg

Notes

3535 _ _ / _ A: Static White + Push; 1-10V; DALI-2 **Multi-volt**
For Tunable White versions, a grouping driver is recommended.

LED **IP20** **CE** **UK** **ERC** **RoHS** **REACH** 102 x 3,5 cm

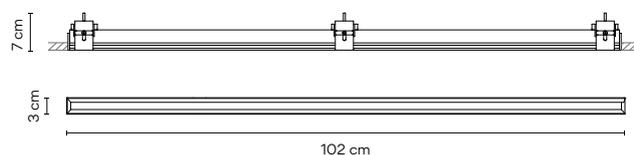3538
TRIMLESS

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	Static White	3538 _ _ / _ _
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/1 _ 2700 K - 2544 lm	_ _ / _ O Static White + On/ Off
	/2 _ 3000 K - 2628 lm	_ _ / _ A Static White + Push; 1-10V; DALI-2
	/3 _ 3500 K - 2712 lm	_ _ / _ M Static White + Without driver
	Tunable White	_ _ / _ Z Static White + Casambi
	/8 _ (2200 K - 4000 K) 1751 lm - 2395 lm	
	E →	
	CRI >90	_ _ / 81 Tunable White + DALI-2 DT8
		_ _ / 8M Tunable White + Without driver
		_ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED STRIP 24V 20,6 W
Constant Voltage 24VDC
220-240V 50/60Hz

Tunable White:

1 x LED STRIP 20,6 W
Constant Voltage 24VDC
220-240V 50/60Hz

Packaging


2 Boxes
Vol 0,018 m³
Gross weight 3,35 Kg Net weight 2,46 Kg

Notes

3538 _ _ / _ A: Static White + Push; 1-10V; DALI-2 **Multi-volt**
Trimless frame can be shipped in advance under request.
For Tunable White versions, a grouping driver is recommended.

LED **IP20** **CE** **UK** **ERC** **RoHS** **REACH** 103 x 4 cm

3540
TRIM

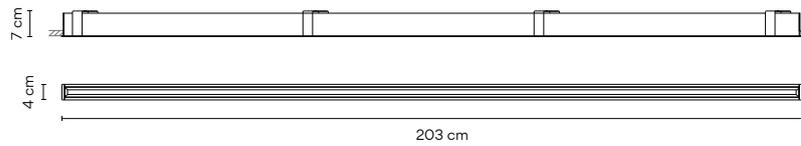

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	Static White	3540 __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	/1 _ 2700 K - 5088 lm /2 _ 3000 K - 5256 lm /3 _ 3500 K - 5424 lm	/ _ 0 Static White + On/ Off / _ A Static White + Push; 1-10V; DALI-2 / _ M Static White + Without driver / _ Z Static White + Casambi
	Tunable White	
	/8 _ (2200 K - 4000 K) 3503 lm - 4791 lm	/ _ 81 Tunable White + DALI-2 DT8 / _ 8M Tunable White + Without driver / _ 8Z Tunable White + Casambi
	 CRI >90	

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 41,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:

1 x LED STRIP 41,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


1 Box 0,125 x 0,125 x 2,25 m
Vol 0,035 m³
Gross weight 7,25 Kg Net weight 5,16 Kg

Notes

3540 __ / _ A: Static White + Push; 1-10V; DALI-2 
For Tunable White versions, a grouping driver is recommended.

       202 x 3,5 cm

3543
TRIMLESS

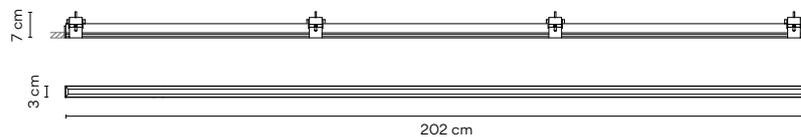

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	Static White	3543 __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	/1 _ 2700 K - 5088 lm /2 _ 3000 K - 5256 lm /3 _ 3500 K - 5424 lm	/ _ 0 Static White + On/ Off / _ A Static White + Push; 1-10V; DALI-2 / _ M Static White + Without driver / _ Z Static White + Casambi
	Tunable White	
	/8 _ (2200 K - 4000 K) 3503 lm - 4791 lm	/ _ 81 Tunable White + DALI-2 DT8 / _ 8M Tunable White + Without driver / _ 8Z Tunable White + Casambi
	 CRI >90	

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 41,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:

1 x LED STRIP 41,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,07 m³
Gross weight 7,85 Kg Net weight 5,66 Kg

Notes

3543 __ / _ A: Static White + Push; 1-10V; DALI-2 
Trimless frame can be shipped in advance under request.
For Tunable White versions, a grouping driver is recommended.

       203 x 4 cm

Ceiling - High Efficiency Low Glare



3550 Trim
14 x 4 cm



3553 Trimless
13 x 3 cm



3555 Trim
27 x 4 cm



3558 Trimless
26 x 3 cm



3560 Trim
53 x 4 cm



3563 Trimless
51 x 3 cm



3565 Trim
104 x 4 cm




3568 Trimless
102 x 3 cm

TRIM

TRIMLESS



3550
 TRIM
 UGR <18



Finishes

- 11/ __ Black
(NCS S 8500-N)
- 23/ __ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

- Static White**
 /1 _ 2700 K - 897 lm
 /2 _ 3000 K - 928 lm
 /3 _ 3500 K - 960 lm

- Tunable White**
 /8 (2200 K - 4000 K)
 664 lm - 898 lm



CRI >90

Control

3550 __ / __

__ / __ O Static White +
On/ Off

__ / __ D Static White +
Push, DALI-2

__ / __ M Static White +
Without driver

__ / __ Z Static White +
Casambi

__ / 81 Tunable White +
DALI-2 DT8

__ / 8M Tunable White +
Without driver

__ / 8Z Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
 Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 7,4 W 350 mA
 Constant Current 350 mA
 220-240V 50/60Hz

Tunable White:
 1 x LED STRIP 7,2 W
 Constant Voltage 24VDC
 220-240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 0,325 m
 Vol 0,003 m³
 Gross weight 0,5 Kg Net weight 0,35 Kg

Notes



For Tunable White versions,
 a grouping driver is recommended.
 Visit vibia.com to group several pieces with just
 one electrical point.



13,5 x 3,5 cm

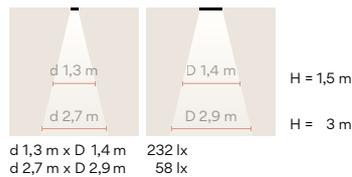

3553
TRIMLESS
UGR <18



- Finishes**
- **11/ _ _ Black**
(NCS S 8500-N)
 - **23/ _ _ Warm White**
(NCS S 0502-Y50R)

- LED Colour Temperature**
- Static White**
- /1 _ 2700 K - 897 lm
 - /2 _ 3000 K - 928 lm
 - /3 _ 3500 K - 960 lm

- Tunable White**
- /8 _ (2200 K - 4000 K)
664 lm - 898 lm



CRI >90

Control
3553 _ _ / _ _

- _ _ / _ **O** Static White +
On/ Off
 - _ _ / _ **D** Static White +
Push, DALI-2
 - _ _ / _ **M** Static White +
Without driver
 - _ _ / _ **Z** Static White +
Casambi
-
- _ _ / **81** Tunable White +
DALI-2 DT8
 - _ _ / **8M** Tunable White +
Without driver
 - _ _ / **8Z** Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,006 m³
Gross weight 0,825 Kg Net weight 0,525 Kg

Notes


Trimless frame can be shipped in advance under request.
For Tunable White versions, remote driver only required.
For tunable White versions, a grouping driver is recommended.
Visit vibia.com to group several pieces with just one electrical point.



14,5 x 4 cm

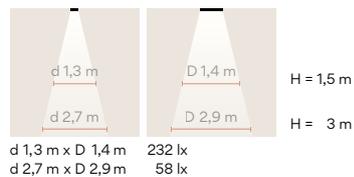

3555
TRIM
UGR <18



Finishes

- **11/ _ _ Black**
(NCS S 8500-N)
- **23/ _ _ Warm White**
(NCS S 0502-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 1674 lm
 - /2 _ 3000 K - 1733 lm
 - /3 _ 3500 K - 1791 lm

- Tunable White**
- /8 _ (2200 K - 4000 K)
1262 lm - 1707 lm



CRI >90

Control

3555 _ _ / _ _

_ _ / _ **O** Static White +
On/ Off

_ _ / _ **D** Static White +
Push, DALI-2

_ _ / _ **M** Static White +
Without driver

_ _ / _ **Z** Static White +
Casambi

_ _ / **81** Tunable White +
DALI-2 DT8

_ _ / **8M** Tunable White +
Without driver

_ _ / **8Z** Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 0,55 Kg Net weight 0,45 Kg

Notes


For Tunable White versions, a grouping driver is recommended.
Visit vibia.com to group several pieces with just one electrical point.



26,2 x 3,5 cm

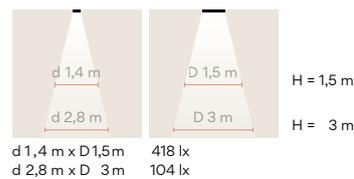

3558
TRIMLESS
UGR <18



- Finishes**
- **11/ _ _ Black**
(NCS S 8500-N)
 - **23/ _ _ Warm White**
(NCS S 0502-Y50R)

LED Colour Temperature

Static White

- /1 _ 2700 K - 1674 lm
- /2 _ 3000 K - 1733 lm
- /3 _ 3500 K - 1791 lm

Tunable White

- /8 _ (2200 K - 4000 K)
1262 lm - 1707 lm

E →

CRI >90

- Control**
- 3558 _ _ / _ _**
-
- _ _ / _ **O** Static White + On/ Off
 - _ _ / _ **D** Static White + Push, DALI-2
 - _ _ / _ **M** Static White + Without driver
 - _ _ / _ **Z** Static White + Casambi
-
- _ _ / **81** Tunable White + DALI-2 DT8
 - _ _ / **8M** Tunable White + Without driver
 - _ _ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220-240V 50/60Hz

Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,006 m³
Gross weight 1,05 Kg Net weight 0,75 Kg

Notes


Trimless frame can be shipped in advance under request.

For tunable White versions, a grouping driver is recommended.


Visit vibia.com to group several pieces with just one electrical point.

LED IP20 CE UK ENEC

27 x 4 cm

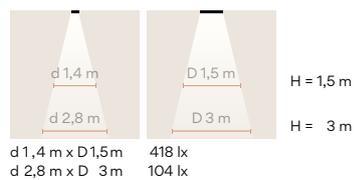

3560
 TRIM
 UGR <18

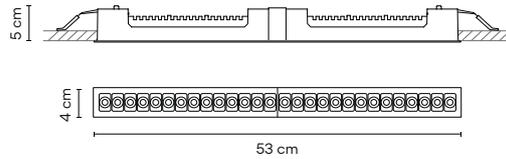

- Finishes**
- **11/ __ Black**
 (NCS S 8500-N)
 - **23/ __ Warm White**
 (NCS S 0502-Y50R)

LED Colour Temperature

Static White
 /1_ 2700 K - 3348 lm
 /2_ 3000 K - 3466 lm
 /3_ 3500 K - 3582 lm

Tunable White
 /8_ (2200 K - 4000 K)
 2524 lm - 3414 lm

E →
 CRI >90

- Control**
- 3560 __ / __**
-
- __ / **O** Static White + On/ Off
 - __ / **A** Static White + Push; 1-10V; DALI-2
 - __ / **M** Static White + Without driver
 - __ / **Z** Static White + Casambi
-
- __ / **81** Tunable White + DALI-2 DT8
 - __ / **8M** Tunable White + Without driver
 - __ / **8Z** Tunable White + Casambi

Materials
 Body: Aluminum & PC-Polycarbonate.
 Shade: PC - Polycarbonate.


Light Source and electronics
2700 K - 3000 K - 3500K:
 1 x LED STRIP 27,4 W 650 mA
 Constant Current 650 mA
 220-240V 50/60Hz

Tunable White:
 1 x LED STRIP 27,4 W
 Constant Voltage 24VDC
 220-240V 50/60Hz


Packaging
 1 Box 0,105 x 0,08 x 0,325 m
 Vol 0,005 m³
 Gross weight 1,25 Kg Net weight 0,78 Kg

Notes
 3560 __ / __ A: Push; 1-10V; DALI-2 **Bi-volt**
 3560 __ / __ Z: Casambi **Bi-volt**
 For Tunable White versions, a grouping driver is recommended.
 Visit vibia.com to group several pieces with just one electrical point.

LED **IP20** **CE** **UK** **ETL** **RoHS**
 52 x 3,5 cm

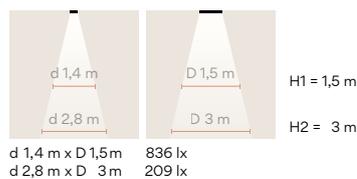

3563
TRIMLESS
UGR <18

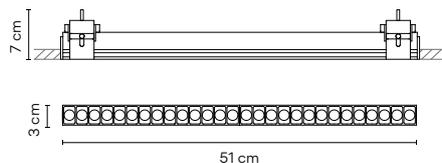

Finishes	LED Colour Temperature
● 11/ _ _ Black (NCS S 8500-N)	Static White
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/1 _ 2700 K - 3348 lm
	/2 _ 3000 K - 3466 lm
	/3 _ 3500 K - 3582 lm
	Tunable White
	/8 _ (2200 K - 4000 K)
	2524 lm - 3414 lm
	
	CRI >90

Control

3563 _ _ / _ _

_ _ / _ O	Static White + On/ Off
_ _ / _ A	Static White + Push; 1-10V; DALI-2
_ _ / _ M	Static White + Without driver
_ _ / _ Z	Static White + Casambi
<hr/>	
_ _ / 81	Tunable White + DALI-2 DT8
_ _ / 8M	Tunable White + Without driver
_ _ / 8Z	Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz
Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,010 m³
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

3563 _ _ / _ A: Push; 1-10V; DALI-2 **Bi-volt**3563 _ _ / _ Z: Casambi **Bi-volt**


Trimless frame can be shipped in advance
under request.

For Tunable White versions, a grouping driver
is recommended.


Visit vibia.com to group several pieces with just
one electrical point.



53 x 4 cm

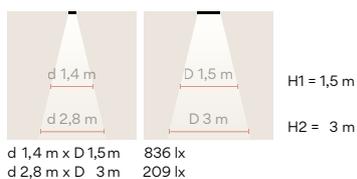

3565
 TRIM
 UGR <18

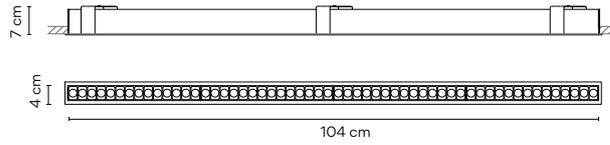

Finishes

- **11/ __ Black**
 (NCS S 8500-N)
- **23/ __ Warm White**
 (NCS S 0502-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 6696 lm
 - /2 _ 3000 K - 6932 lm
 - /3 _ 3500 K - 7164 lm

- Tunable White**
- /8 _ (2200 K - 4000 K)
 5048 lm - 6828 lm



CRI >90

Control

3565 __ / __

- __ / _ **O** Static White + On/ Off
 - __ / _ **A** Static White + Push; 1-10V; DALI-2
 - __ / _ **M** Static White + Without driver
 - __ / _ **Z** Static White + Casambi
-
- __ / **81** Tunable White + DALI-2 DT8
 - __ / **8M** Tunable White + Without driver
 - __ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
 Shade: PC - Polycarbonate.
 Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 54,8 W 650 mA
 Constant Current 650 mA
 220~240V 50/60Hz

Tunable White:
 1 x LED STRIP 54,7 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 1,095 m
 Vol 0,009 m³
 Gross weight 3,25 Kg Net weight 2,36 Kg

Notes


3565 __ / _ O: Static White + On/ Off **Bi-volt**
 3565 __ / _ A: Push; 1-10V; DALI-2 **Bi-volt**
 3565 __ / _ Z: Casambi **Bi-volt**
 For Tunable White versions, a grouping driver is recommended.



102 x 3,5 cm

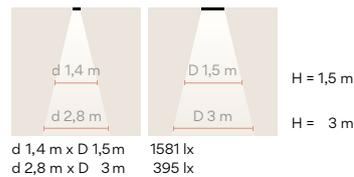

3568
 TRIMLESS
 UGR <18

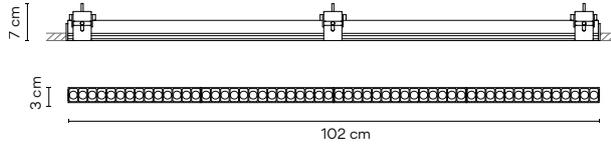

Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) 	<p>Static White</p> <p>/1 _ 2700 K - 6696 lm</p> <p>/2 _ 3000 K - 6932 lm</p> <p>/3 _ 3500 K - 7164 lm</p> <p>Tunable White</p> <p>/8 _ (2200 K - 4000 K) 5048 lm - 6828 lm</p> <p> CRI >90</p>	<p>3568 _ _ / _ _</p> <hr/> <p>_ _ / _ 0 Static White + On/ Off</p> <p>_ _ / _ A Static White + Push; 1-10V; DALI-2</p> <p>_ _ / _ M Static White + Without driver</p> <p>_ _ / _ Z Static White + Casambi</p> <hr/> <p>_ _ / 81 Tunable White + DALI-2 DT8</p> <p>_ _ / 8M Tunable White + Without driver</p> <p>_ _ / 8Z Tunable White + Casambi</p>

Materials

Body: Aluminum & PC-Polycarbonate.
 Shade: PC - Polycarbonate.
 Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 54,8 W 650 mA
 Constant Current 650 mA
 220~240V 50/60Hz

Tunable White:
 1 x LED STRIP 54,7 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
 Vol 0,018 m³
 Gross weight 3,35 Kg Net weight 2,46 Kg

Notes

3568 _ _ / _ 0: On/ Off

3568 _ _ / _ A: Push; 1-10V; DALI-2

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

104 x 4 cm





Ceiling - Wall Washer



3575 Trim
27 x 4 cm



3578 Trimless
26 x 3 cm



3580 Trim
53 x 4 cm



3583 Trimless
51 x 3 cm



3585 Trim
104 x 4 cm



3588 Trimless
102 x 3 cm


TRIM



TRIMLESS



3575
TRIM



Finishes

- **11/ _ _ Black**
(NCS S 8500-N)
- **23/ _ _ Warm White**
(NCS S 0502-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 1392 lm
 - /2 _ 3000 K - 1430 lm
 - /3 _ 3500 K - 1455 lm

- Tunable White**
- /8 (2200 K - 4000 K)
764 lm - 849 lm



CRI >90

Control

3575 _ _ / _ _

- _ _ / _ **O** Static White + On/ Off
 - _ _ / _ **D** Static White + Push, DALI-2
 - _ _ / _ **M** Static White + Without driver
 - _ _ / _ **Z** Static White + Casambi
-
- _ _ / **81** Tunable White + DALI-2 DT8
 - _ _ / **8M** Tunable White + Without driver
 - _ _ / **8Z** Tunable White + Casambi

Materials

Frame: PC- Polycarbonate.
 Body: Aluminum & PC-Polycarbonate.
 Lens: PMMA. Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 13,3 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Tunable White:
 1 x LED STRIP 11,5 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
 Vol 0,015 m³
 Gross weight 0,55 Kg Net weight 0,45 Kg


Notes

For Tunable White versions, a grouping driver is recommended.


Visit vibia.com to group several pieces with just one electrical point.



∠ 26,2 x 3,5 cm

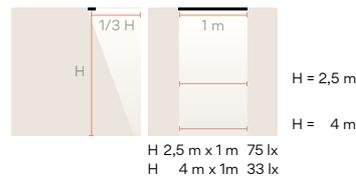

3578
TRIMLESS



- | | |
|---|---|
| <p>Finishes</p> <ul style="list-style-type: none"> ● 11/ _ _ Black
(NCS S 8500-N) ● 23/ _ _ Warm White
(NCS S 0502-Y50R) | <p>LED Colour Temperature</p> <p>Static White</p> <ul style="list-style-type: none"> /1 _ 2700 K - 1392 lm /2 _ 3000 K - 1430 lm /3 _ 3500 K - 1455 lm <p>Tunable White</p> <ul style="list-style-type: none"> /8 _ (2200 K - 4000 K)
764 lm - 849 lm <p>F </p> <p>CRI >90</p> |
|---|---|

- Control**
- 3578** _ _ / _ _
-
- _ _ / _ **O** Static White + On/ Off
 - _ _ / _ **D** Static White + Push, DALI-2
 - _ _ / _ **M** Static White + Without driver
 - _ _ / _ **Z** Static White + Casambi
-
- _ _ / **81** Tunable White + DALI-2 DT8
 - _ _ / **8M** Tunable White + Without driver
 - _ _ / **8Z** Tunable White + Casambi

Materials
Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.

Light Source and electronics


2700 K - 3000 K - 3500K:
1 x LED STRIP 13,3 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz

Tunable White:
1 x LED STRIP 11,5 W
Constant Voltage 24VDC
220-240V 50/60Hz


Packaging
2 Boxes
Total Vol 0,03 m³
Gross weight 1,1 Kg Net weight 0,75 Kg

Notes
Trimless frame can be shipped in advance under request.
For tunable White versions, a grouping driver is recommended.
Visit vibia.com to group several pieces with just one electrical point.

27 x 4 cm

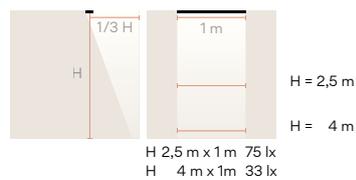

3580
TRIM

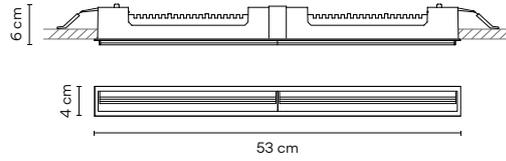

- Finishes**
- **11/ __ Black**
(NCS S 8500-N)
 - **23/ __ Warm White**
(NCS S 0502-Y50R)

- LED Colour Temperature**
- Static White**
- /1_ 2700 K - 2784 lm
 - /2_ 3000 K - 2860 lm
 - /3_ 3500 K - 2911 lm
- Tunable White**
- /8_ (2200 K - 4000 K)
1528 lm - 1698 lm
- F**
- CRI >90

Control

3580 __ / __

- __ / __ **0** Static White + On/ Off
 - __ / __ **A** Static White + Push; 1-10V; DALI-2
 - __ / __ **M** Static White + Without driver
 - __ / __ **Z** Static White + Casambi
-
- __ / **81** Tunable White + DALI-2 DT8
 - __ / **8M** Tunable White + Without driver
 - __ / **8Z** Tunable White + Casambi

Materials

Frame: PC- Polycarbonate.
 Body: Aluminum & PC-Polycarbonate.
 Lens: PMMA. Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 26,6 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Tunable White:
 1 x LED STRIP 23 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,57 m
 Vol 0,005 m³
 Gross weight 1,25 Kg Net weight 0,78 Kg

Notes


3580 __ / __ A: Push; 1-10V; DALI-2 **Bi-volt**
 3568 __ / __ Z: Casambi **Bi-volt**

For Tunable White versions, a grouping driver is recommended.


Visit vibia.com to group several pieces with just one electrical point.



52 x 3,5 cm

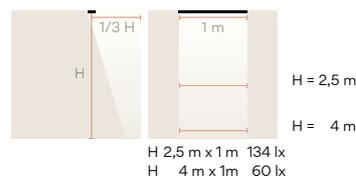

3583
TRIMLESS

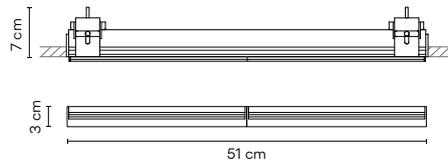

Finishes	LED Colour Temperature
● 11/ _ _ Black (NCS S 8500-N)	Static White
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/1 _ 2700 K - 2784 lm
	/2 _ 3000 K - 2860 lm
	/3 _ 3500 K - 2911 lm
	Tunable White
	/8 _ (2200 K - 4000 K)
	1528 lm - 1698 lm
	F
	CRI >90

Control
3583 _ _ / _ _
__ / _ O Static White + On/ Off
__ / _ A Static White + Push; 1-10V; DALI-2
__ / _ M Static White + Without driver
__ / _ Z Static White + Casambi
__ / 81 Tunable White + DALI-2 DT8
__ / 8M Tunable White + Without driver
__ / 8Z Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 26,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 23 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,01 m³
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

3568 _ _ / _ A: Push; 1-10V; DALI-2 **Bi-volt**

3568 _ _ / _ Z: Casambi **Bi-volt**


Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.


Visit vibia.com to group several pieces with just one electrical point.



53 x 4 cm

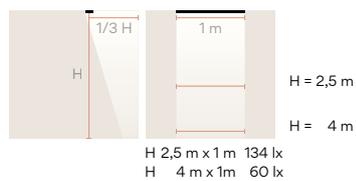

3585
TRIM

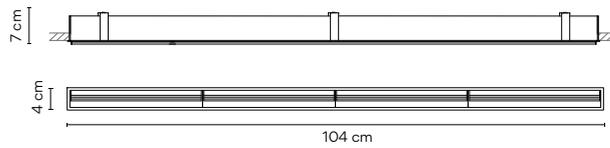

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	Static White /1 _ 2700 K - 5568 lm /2 _ 3000 K - 5721 lm /3 _ 3500 K - 5822 lm	3583 _ _ / _ _
● 23/ _ _ Warm White (NCS S 0502-Y50R)	Tunable White /8 _ (2200 K - 4000 K) 3056 lm - 3396 lm	_ _ / _ O Static White + On/ Off
		_ _ / _ A Static White + Push; 1-10V; DALI-2
	CRI >90	_ _ / _ M Static White + Without driver
		_ _ / _ Z Static White + Casambi
		_ _ / 81 Tunable White + DALI-2 DT8
		_ _ / 8M Tunable White + Without driver
		_ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
 Shade: PC - Polycarbonate.
 Lens: PMMA.
 Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 53,2 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Tunable White:
 1 x LED STRIP 46 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging

1 Box 0,125 x 0,125 x 1,9 m
 Vol 0,017 m³
 Gross weight 3,25 Kg Net weight 2,3 Kg


Notes


3585 _ _ / _ **O**: On/ Off **[Bi-volt]**
 3585 _ _ / _ **A**: Push; 1-10V; DALI-2 **[Bi-volt]**
 3585 _ _ / _ **Z**: Casambi **[Bi-volt]**

For Tunable White versions, a grouping driver is recommended.

 103 x 3,5 cm

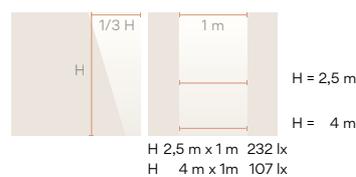

3588
 TRIMLESS

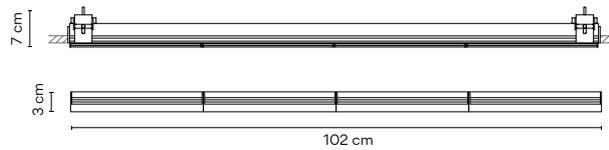
Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) 	Static White /1_ 2700 K - 5568 lm /2_ 3000 K - 5721 lm /3_ 3500 K - 5822 lm Tunable White /8_ (2200 K - 4000 K) 3056 lm - 3396 lm F → CRI >90	3588 _ _ / _ _ <hr/> _ _ / _ O Static White + On/ Off _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi <hr/> _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
 Shade: PC - Polycarbonate. Lens: PMMA.
 Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 53,2 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz
Tunable White:
 1 x LED STRIP 46 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging


2 Boxes
 Total Vol 0,017 m³
 Gross weight 4,5 Kg Net weight 3,06 Kg

Notes

3588 _ _ / _ O: On/ Off **Bi-volt**
 3588 _ _ / _ A: Push; 1-10V; DALI-2 **Bi-volt**
 3588 _ _ / _ Z: Casambi **Bi-volt**
 For Tunable White versions, a grouping driver
 is recommended.

LED **IP20** **CE** **UKCA** **ERC** **RoHS**

104 x 4 cm

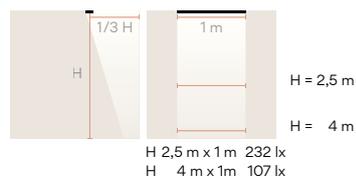



Ceiling - Colour Mood Grazer



3605 Trim
103 x 4 cm



3608 Trimless
100 x 3 cm




3610 Trim
203 x 4 cm




3613 Trimless
202 x 3 cm


TRIM



TRIMLESS



3605 TRIM

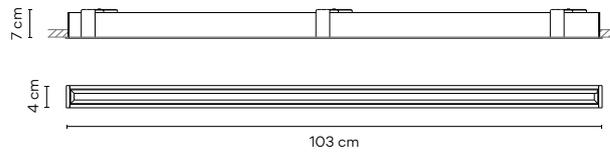

Finishes

- **11/ __ Black**
(NCS S 8500-N)
- **23/ __ Warm White**
(NCS S 0502-Y50R)

LED Colour Temperature

- Infinite Colour (TW+ RGB)**
- /A _ 1575 lm - 1861 lm
 - 70 lm 11 (RED)
 - 182 lm (GREEN)
 - 35 lm (BLUE)



CRI >90

Control

3605 __ / AY ProtoPixel*

Materials

Frame: Aluminum.
Body: Aluminum.
Shade: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED STRIP 24V 28 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,09 m
Vol 0,009 m³
Gross weight 3,17 Kg Net weight 2,4 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



102 x 3,5 cm

3608 TRIMLESS

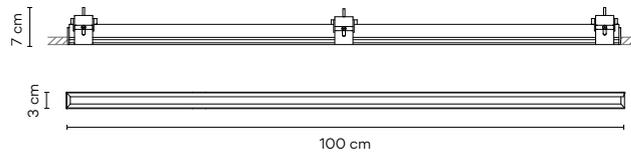

Finishes

- **11/ __ Black**
(NCS S 8500-N)
- **23/ __ Warm White**
(NCS S 0502-Y50R)

LED Colour Temperature

- Infinite Colour (TW+ RGB)**
- /A _ 1575 lm - 1861 lm
 - 70 lm 11 (RED)
 - 182 lm (GREEN)
 - 35 lm (BLUE)



CRI >90

Control

3608 __ / AY ProtoPixel*

Materials

Trimless frame: Aluminum.
Body: Aluminum.
Shade: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED STRIP 24V 28 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,02 m³
Gross weight 3,17 Kg Net weight 2,4 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Trimless frame can be shipped in advance under request.



103 x 4 cm

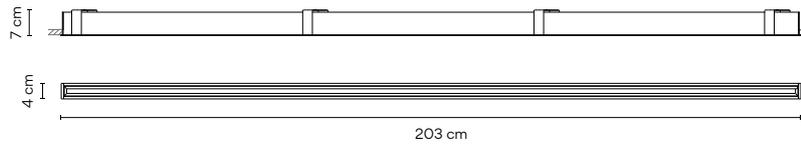3610
TRIM


Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) 	Infinite Colour (TW+ RGB) /A _ 3150 lm - 3722 lm 140 lm 11 (RED) 364 lm (GREEN) 70 lm (BLUE)	3610 _ _ / AY ProtoPixel*
	 CRI >90	

Materials

Frame: Aluminum.
 Body: Aluminum.
 Shade: Aluminum.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED STRIP 56 W 24 V
 Constant Voltage 24VDC
 220-240V 50/60Hz

Packaging

1 Box 0,125 x 0,125 x 2,09 m
 Vol 0,047 m³
 Gross weight 5,25 Kg Net weight 4,6 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



202 x 3,5 cm

3613
TRIMLESS


Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) 	Infinite Colour (TW+ RGB) /A _ 3150 lm - 3722 lm 140 lm 11 (RED) 364 lm (GREEN) 70 lm (BLUE)	3613 _ _ / AY ProtoPixel*
	 CRI >90	

Materials

Trimless frame: Aluminum.
 Body: Aluminum.
 Shade: Aluminum.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

1x LED STRIP 24V 56 W
 Constant Voltage 24VDC
 220-240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,093 m³
 Gross weight 5,25 Kg Net weight 4,6 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Trimless frame can be shipped in advance under request.



203 x 4 cm



Palma

Design by Antoni Arola

The interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions. Palma connects light and vegetation as in the natural landscape.

Wall



3700

55 x 19 x 25 cm

3702

85 x 22 x 25 cm

3704

120 x 22 x 25 cm

3706

195 x 22 x 25 cm



3710

22 x 55 x 25 cm

3714

22 x 114 x 26 cm

3716

22 x 114 x 26 cm

3718

22 x 187 x 26 cm

3700

Finishes

● **18/** _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature


/1_ 2700 K - 868 lm

Control

3700 18 / 1B Push; 1-10V

F >

CRI >90



Materials

Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics


2 x LED 4,6 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz

Packaging

1 Box 0,57 x 0,31 x 0,21 m
Vol 0,0382 m³
Gross weight 3 Kg Net weight 1,8 Kg

LED **IP20** **CE** **UK** **ERAC**

3702



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 868 lm
 F
 CRI >90

Control
 3702 __ / __
 __ / 11 DALI-2
 __ / 1B Push; 1-10V

Materials

Diffuser: Blown-glass.
 Profile: Aluminum.
 Planter: PMMA.


Light Source and electronics
 2 x LED 4,6 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Packaging

1 Box 0,87 x 0,31 x 0,21 m
 Vol 0,0581 m³
 Gross weight 4,05 Kg Net weight 2,4 Kg



3704



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 1736 lm
 F
 CRI >90

Control
 3704 __ / __
 __ / 11 DALI-2
 __ / 1B Push; 1-10V

Materials

Diffuser: Blown-glass.
 Profile: Aluminum.
 Planter: PMMA.


Light Source and electronics
 4 x LED 4,6 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,0081 m³
 Gross weight 6,2 Kg Net weight 3,9 Kg



3706



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 2604 lm
 F
 CRI >90

Control
 3706 __ / __
 __ / 11 DALI-2
 __ / 1B Push; 1-10V

Materials

Diffuser: Blown-glass.
 Profile: Aluminum.
 Planter: PMMA.


Light Source and electronics
 6 x LED 4,6 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,1793 m³
 Gross weight 6,4 Kg Net weight 3,9 Kg



3710



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 868 lm
 F
 CRI >90

Control
 3710 18 / 1B Push; 1-10V

Materials

Diffuser: Blown-glass.
 Profile: Aluminum.


Light Source and electronics
 2 x LED 4,6 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Packaging

1 Box 0,57 x 0,31 x 0,21 m
 Vol 0,0382 m³
 Gross weight 2,6 Kg Net weight 1,8 Kg



3714



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 868 lm
 F →
 CRI >90

Control
3714 __ / __
 __ / 11 DALI-2
 __ / 1B Push; 1-10V


Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.
 Planter: PMMA.

Light Source and electronics
 2 x LED 4,6 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,0081 m³
 Gross weight 5,2 Kg Net weight 2,9 Kg

LED ⓘ IP20 CE UK ENEC

3716



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 1736 lm
 F →
 CRI >90

Control
3716 __ / __
 __ / 11 DALI-2
 __ / 1B Push; 1-10V


Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.

Light Source and electronics
 4 x LED 4,6 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,0081 m³
 Gross weight 6,5 Kg Net weight 4,2 Kg

LED ⓘ IP20 CE UK ENEC

3718



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 2604 lm
 F →
 CRI >90

Control
3718 __ / __
 __ / 11 DALI-2
 __ / 1B Push; 1-10V

Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.
 Planter: PMMA.

Light Source and electronics
 6 x LED 4,6 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,1793 m³
 Gross weight 8,6 Kg Net weight 6,1 Kg

LED ⓘ IP20 CE UK ENEC

Pendant

3720



Ø 25 cm

3724



Ø 25 cm

3726



Ø 25 cm

3728



Ø 25 cm

3730



Ø 25 cm

3734



150 cm

3735



150 cm

3736



195 cm

3720


Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 868 lm
 F →
 CRI >90

Control

3720 __ / __

__ / 11 DALI-2
 __ / 1B Push; 1-10V
 __ / 1Z Casambi



Materials

Diffuser: Blown-glass.
 Profile: Aluminum.

Light Source and electronics

2 x LED 4,6 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging


1 Box 0,71 x 0,27 x 0,21 m
 Vol 0,0413 m³
 Gross weight 3,75 Kg Net weight 2,8 Kg

Notes

3720 __ / 11: DALI-2 **Bi-volt**
 3720 __ / 1B: Push; 1-10V **Bi-volt**
 Extra cable length.

LED IP20 CE UK ENEC

3724



Finishes
 ● 18/ _ _ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 868 lm
 F
 CRI >90

Control


3724 _ _ / _ _
 _ _ / 11 DALI-2
 _ _ / 1B Push; 1-10V
 _ _ / 1Z Casambi

Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.
 Planter: PMMA.


Light Source and electronics
 2 x LED 4,6 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging
 1 Box 1,02 x 0,27 x 0,21 m
 Vol 0,0588 m³
 Gross weight 4,6 Kg Net weight 3,3 Kg

Notes
 3724 _ _ / 11: DALI-2 **Bi-volt**
 3724 _ _ / 1B: Push; 1-10V **Bi-volt**
 Extra cable length.



3726



Finishes
 ● 18/ _ _ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 1736 lm
 F
 CRI >90

Control


3726 _ _ / _ _
 _ _ / 11 DALI-2
 _ _ / 1B Push; 1-10V
 _ _ / 1Z Casambi

Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.


Light Source and electronics
 4 x LED 4,6 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging
 1 Box 1,02 x 0,27 x 0,21 m
 Vol 0,0588 m³
 Gross weight 5,4 Kg Net weight 4,1 Kg

Notes
 Extra cable length.



3728



Finishes
 ● 18/ _ _ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 1736 lm
 F
 CRI >90

Control


3728 _ _ / _ _
 _ _ / 11 DALI-2
 _ _ / 1B Push; 1-10V
 _ _ / 1Z Casambi

Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.
 Planter: PMMA.


Light Source and electronics
 4 x LED 4,6 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,75 x 0,53 x 0,21 m
 Vol 0,0857 m³
 Gross weight 8,8 Kg Net weight 4,7 Kg

Notes
 Extra cable length.



3730



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 2604 lm
 F
 CRI >90


Control
 3730 __ / __
 __ / 1A Push; 1-10V; DALI-2
 __ / 1Z Casambi

Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.
 Light Source and electronics
 6 x LED 4,6 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,75 x 0,53 x 0,21 m
 Vol 0,0857 m³
 Gross weight 9,5 Kg Net weight 5,4 Kg
 Notes
 Extra cable length.



3734



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 2265 lm
 F
 CRI >90


Control
 3734 __ / __
 __ / 1A Push; 1-10V; DALI-2
 __ / 1Z Casambi

Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.
 Planter: PMMA.
 Light Source and electronics
 1 x LED 2 W 500 mA
 4 x LED 4,6 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging
 1 Box 1,72 x 0,33 x 0,31 m
 Vol 0,1790 m³
 Gross weight 9,4 Kg Net weight 5,95 Kg
 Notes
 3724 __ / 1A: Push; 1-10V; DALI-2 Bi-volt
 Extra cable length.



3735



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 2265 lm
 F
 CRI >90


Control
 3735 __ / __
 __ / 1A Push; 1-10V; DALI-2
 __ / 1Z Casambi

Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.
 Light Source and electronics
 6 x LED 4,6 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging
 1 Box 1,72 x 0,33 x 0,31 m
 Vol 0,1790 m³
 Gross weight 9,4 Kg Net weight 5,95 Kg
 Notes
 Extra cable length.



3736



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 3133 lm
 F
 CRI >90

Control
 3736 __ / __
 __ / 1A Push; 1-10V; DALI-2
 __ / 1Z Casambi

Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.
 Planter: PMMA.
 Light Source and electronics
 1 x LED 2 W 500 mA
 6 x LED 4,6 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz


Packaging
 1 Box 2,17 x 0,33 x 0,31 m
 Vol 0,2219 m³
 Gross weight 12,29 Kg Net weight 8,16 Kg
 Notes
 Extra cable length.



Ceiling



3760



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 1736 lm
 F
 CRI >90

Control
3760 __ / __


__ / 11 DALI-2
 __ / 1B Push; 1-10V
 __ / 1Z Casambi

Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.
 Light Source and electronics
 4 x LED 4,6 W 500 mA
 Constant Current 500 mA
 100~240Vac 50/60Hz

Packaging
 1 Box 0,81 x 0,33 x 0,31 m
 Vol 0,0083 m³
 Gross weight 6,2 Kg Net weight 3,9 Kg



3764



Finishes
 ● 18/ __ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 3472 lm
 F
 CRI >90

Control
3764 __ / __

__ / 1A Push; 1-10V;
 DALI-2
 __ / 1Z Casambi

Materials
 Diffuser: Blown-glass.
 Profile: Aluminum.
 Light Source and electronics
 8 x LED 4,6 W 500 mA
 Constant Current 500 mA
 100~240Vac 50/60Hz

Packaging
 1 Box 0,81 x 0,33 x 0,31 m
 Vol 0,0083 m³
 Gross weight 9,5 Kg Net weight 5,4 Kg





Bigger

Design by La Invisible

Bigger serves as statement lighting without overbearing the space it occupies, radiating with profuse light which cascades down from the ceiling, its impressive scale bringing the space to life.

Ceiling

3900

Ø 80 cm



3905

Ø 84 cm



3910

Ø 103 cm



3915

Ø 107 cm



3900

Finishes

- 23/ _ _ Beige L1 (NCS S 0502-Y50R)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 53/ _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White

/1 _ 2700 K - 6547,3 lm



/3 _ 3500 K - 7359,4 lm



Tunable White

/8 _ (2200 K - 4000 K)
5748,1 lm - 7351,4 lm



CRI >90

Control

3900 _ _ / _ _

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ Z Static White +
Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8Z Tunable White +
Casambi

10 cm



Ø 80 cm

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:

1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110-240V 50/60Hz

Tunable White:

1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120-250V 50/60Hz

Packaging


1 Box 0,96 x 0,96 x 0,27 m
Vol 0,487 m³
Gross weight 11,65 Kg Net weight 9,65 Kg

Notes

3900 _ _ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE ENEC ENEC Dimmer

3905



- Finishes**
- **23/** __ Beige L1 (NCS S 0502-Y50R)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White

/1 _ 2700 K - 6547,3 lm
 [D]

/3 _ 3500 K - 7359,4 lm
 [C]

Tunable White

/8 _ (2200 K - 4000 K)
 5748,1 lm - 7351,4 lm
 [C]

CRI >90

Control

3905 __ / __

__ / **A** Static White +
 Push; 1-10V; DALI-2

__ / **Z** Static White +
 Casambi

__ / **81** Tunable White +
 DALI-2 DT8

__ / **8Z** Tunable White +
 Casambi

Materials

Body: Aluminum.
 Shade: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
 1 x LED MODULE 46,7 W 1050 mA
 Constant Current 1050 mA
 110-240V 50/60Hz

Tunable White:
 1 x LED MODULE 45,6 W 1040 mA
 Constant Current 1040 mA
 120-250V 50/60Hz

Packaging


1 Box 0,96 x 0,96 x 0,27 m
 Vol 0,487 m³
 Gross weight 12,7 Kg Net weight 10,75 Kg

Notes

3905 __ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

[LED] [IP20] [CE] [UKA] [EAC] [E] [Dimmer]

3910



- Finishes**
- **23/** __ Beige L1 (NCS S 0502-Y50R)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White

/1 _ 2700 K - 12826,9 lm
 [D]

/3 _ 3500 K - 14703,6 lm
 [C]

Tunable White

/8 _ (2200 K - 4000 K)
 14743,8 lm - 11402,6 lm
 [C]

CRI >90

Control

3910 __ / __

__ / **A** Static White +
 Push; 1-10V; DALI-2

__ / **Z** Static White +
 Casambi

__ / **81** Tunable White +
 DALI-2 DT8

__ / **8Z** Tunable White +
 Casambi

Materials

Body: Aluminum.
 Shade: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
 1 x LED MODULE 94,1 W 1050 mA
 Constant Current 1050 mA
 110-240V 50/60Hz

Tunable White:
 1 x LED MODULE 92,7 W 1040 mA
 Constant Current 1040 mA
 120-250V 50/60Hz

Packaging


1 Box 1,16 x 1,16 x 0,35 m
 Vol 0,487 m³
 Gross weight 17,9 Kg Net weight 15,8 Kg

Notes

3910 __ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

[LED] [IP20] [CE] [UKA] [EAC] [E] [Dimmer]

3915



- Finishes**
- **23/** __ Beige L1
(NCS S 0502-Y50R)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)
 - **37/** __ Terra Red
(NCS S 4040-Y70R)
 - **53/** __ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

Static White

/1 _ 2700 K - 12826,9 lm

D >

/3 _ 3500 K - 14703,6 lm

C >

Tunable White

/8 _ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm

C >

CRI >90

Control

3915 __ / __

__ / **A** Static White +
Push; 1-10V; DALI-2

__ / **Z** Static White +
Casambi

__ / **81** Tunable White +
DALI-2 DT8

__ / **8Z** Tunable White +
Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110-240V 50/60Hz

Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120-250V 50/60Hz

Packaging

1 Box 1,16 x 1,16 x 0,35 m
Vol 0,487 m³
Gross weight 19,2 Kg Net weight 17,1 Kg

Notes

3915 __ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE ENEC ENEC Dimmer



Pendant



3920
Ø 80 cm



3925
Ø 84 cm




3930
Ø 103 cm



3935
Ø 107 cm

3920



- Finishes**
- **23/** _ _ Beige L1
(NCS S 0502-Y50R)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- Static White**
- /1** _ 2700 K - 6547,3 lm
 - D** >
 - /3** _ 3500 K - 7359,4 lm
 - C** >
- Tunable White**
- /8** _ (2200 K - 4000 K)
5748,1 lm - 7351,4 lm
 - C** >
- CRI >90

- Control**
- 3920** _ _ / _ _
-
- _ _ / _ **A** Static White +
Push; 1-10V; DALI-2
 - _ _ / _ **Z** Static White +
Casambi
-
- _ _ / **81** Tunable White +
DALI-2 DT8
 - _ _ / **8Z** Tunable White +
Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110-240V 50/60Hz

Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120-250V 50/60Hz

Packaging


1 Box 0,96 x 0,96 x 0,27 m
Vol 0,487 m³
Gross weight 11,71 Kg Net weight 9,7 Kg

Notes

3920 _ _ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE ENEC ENEC Dimmer

3925



- Finishes**
- **23/** __ Beige L1 (NCS S 0502-Y50R)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 6547,3 lm
D

/3 _ 3500 K - 7359,4 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
5748,1 lm - 7351,4 lm
C

CRI >90

Control

3925 __ / __

__ / __ **A** Static White + Push; 1-10V; DALI-2

__ / __ **Z** Static White + Casambi

__ / **81** Tunable White + DALI-2 DT8

__ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum. Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging



1 Box 0,96 x 0,96 x 0,27 m
Vol 0,487 m³
Gross weight 12,75 Kg Net weight 10,75 Kg

Notes

3925 __ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE UK ENE Dimmer

3930



- Finishes**
- **23/** __ Beige L1 (NCS S 0502-Y50R)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 12826,9 lm
D

/3 _ 3500 K - 14703,6 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm
C

CRI >90

Control

3930 __ / __

__ / __ **A** Static White + Push; 1-10V; DALI-2

__ / __ **Z** Static White + Casambi

__ / **81** Tunable White + DALI-2 DT8

__ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum. Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging



1 Box 1,16 x 1,16 x 0,35 m
Vol 0,487 m³
Gross weight 18 Kg Net weight 15,9 Kg

Notes

3930 __ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE UK ENE Dimmer

3935



- Finishes**
- 23/ _ _ Beige L1 (NCS S 0502-Y50R)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 53/ _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- Static White**
- /1 _ 2700 K - 12826,9 lm
 - [D] /3 3500 K - 14703,6 lm
- Tunable White**
- /8 _ (2200 K - 4000 K) 14743,8 lm - 11402,6 lm
 - [C]
- CRI >90

- Control**
- 3935 _ _ / _ _
-
- _ _ / _ A Static White + Push; 1-10V; DALI-2
 - _ _ / _ Z Static White + Casambi
-
- _ _ / 81 Tunable White + DALI-2 DT8
 - _ _ / 8Z Tunable White + Casambi

Materials
 Body: Aluminum. Shade: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
 1 x LED MODULE 94,1 W 1050 mA
 Constant Current 1050 mA
 110-240V 50/60Hz

Tunable White:
 1 x LED MODULE 92,7 W 1040 mA
 Constant Current 1040 mA
 120-250V 50/60Hz

Packaging
 1 Box 1,16 x 1,16 x 0,35 m
 Vol 0,487 m³
 Gross weight 19,3 Kg Net weight 17,2 Kg

Notes
 3935 _ _ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

[LED] [IP20] [CE] [UKA] [EAC] [Dimmer]



Wind

Design by Jordi Vilardell

A perfect marriage of technology and tradition. Wind's drum shade is made of fibreglass, an innovative webbed texture and pattern that elevates the visual contribution of this timeless silhouette.

Outdoor



4072

Ø 60 cm



4077

Ø 60 cm



4078

Ø 120 cm



4057

Ø 60 x 191 cm



4062


Ø 120 x 195 cm



4067

Ø 60 x 166 cm

4057



Finishes

- **27/** _ _ Sand (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature

/1_ 2700 K - 3299 lm

 CRI >90

Control

4057 _ _ / 10 On/ Off

Materials

Shade: FG- Fibreglass. Weight: Concrete.
 Lid: Steel. Diffuser: PMMA.

Light Source and electronics


1 x LED PLATE 25 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz


Packaging

2 Boxes
 Total Vol 1,0300 m³
 Gross weight 45,1 Kg Net weight 27,8 Kg


Notes

Portable version. Electric cable 1,5 m



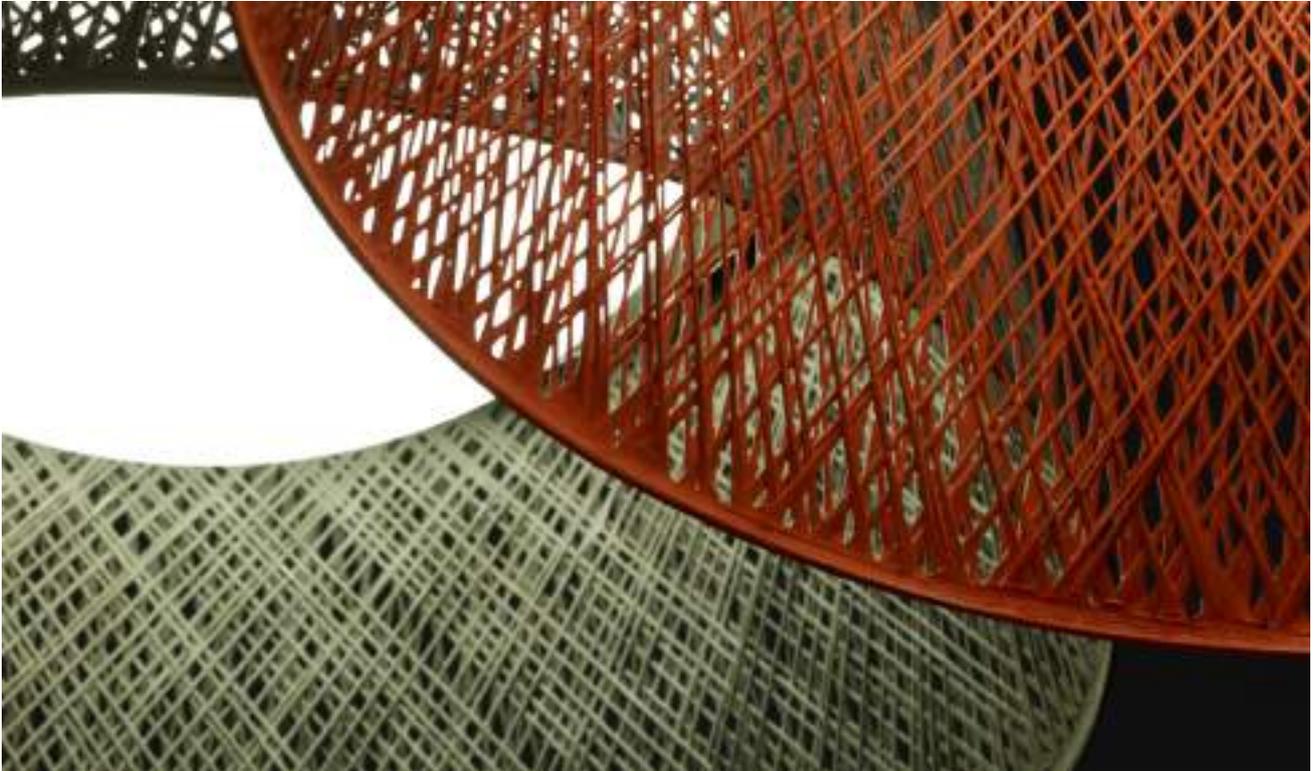

4062

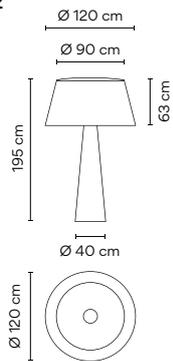

- Finishes
- 27/ _ _ Sand (NCS S 1505-Y50R)
 - 53/ _ _ Green M1 (NCS S 6005-G80Y)
 - 61/ _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature
 /1_ 2700 K - 3481 lm
 D >

CRI >90

Control
 4062 _ _ / 10 On/ Off

Materials
 Shade: FG- Fiberglass. Base: FG- Fiberglass.
 Diffuser: PMMA.


Light Source and electronics
 4 x LED PLATE 14 W 500 mA
 1 x LED 2,4 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging
 4 Boxes
 Total Vol 2,3500 m³
 Gross weight 125,2 Kg Net weight 113,23 Kg

Notes
 Portable version. Electric cable 2 m



4067



- Finishes
- 27/ _ _ Sand (NCS S 1505-Y50R)
 - 53/ _ _ Green M1 (NCS S 6005-G80Y)
 - 61/ _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature
 /1_ 2700 K - 3481 lm
 D >

CRI >90

Control
 4067 _ _ / 10 On/ Off

Materials
 Shade: FG- Fiberglass. Base: FG- Fiberglass.
 Diffuser: PMMA.


Light Source and electronics
 1 x LED PLATE 25 W 700 mA
 1 x LED 2,4 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging
 3 Boxes
 Total Vol 1,5000 m³
 Gross weight 50 Kg Net weight 30,5 Kg

Notes
 Portable version. Electric cable 1,5 m



4072



Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 27/ __ Sand (NCS S 1505-Y50R) ● 53/ __ Green M1 (NCS S 6005-G80Y) ● 61/ __ Ocre red (NCS S 3050-Y60R) 	/1_ 2700 K - 3299 lm CRI >90	4072 __ / 10 On/ Off

Materials

Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging


1 Box 0,50 x 0,77 x 0,77 m
Vol 0,2970 m³
Gross weight 11,1 Kg Net weight 9,9 Kg

Notes

Surface mounted
Extra cable length.



4077



Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 27/ __ Sand (NCS S 1505-Y50R) ● 53/ __ Green M1 (NCS S 6005-G80Y) ● 61/ __ Ocre red (NCS S 3050-Y60R) 	/1_ 2700 K - 3299 lm CRI >90	4077 __ / 10 On/ Off

Materials

Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging


1 Box 0,67 x 0,67 x 0,62 m
Vol 0,2970 m³
Gross weight 11 Kg Net weight 9,9 Kg

Notes

Surface mounted
Extra cable length.



4078



Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> ● 27/ __ Sand (NCS S 1505-Y50R) ● 53/ __ Green M1 (NCS S 6005-G80Y) ● 61/ __ Ocre red (NCS S 3050-Y60R) 	/1_ 2700 K - 3299 lm CRI >90	4078 __ / 10 On/ Off

Materials

Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics

3 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging

1 Box 0,74 x 1,24 x 1,27 m
Vol 1,1300 m³
Gross weight 38 Kg Net weight 30 Kg

Notes

Indoor only
Extra cable length.





Break

Design by Xuclà & Alemany

Break is distinguished by its architectural attitude. A series of cubic volumes provide indirect downlight while doubling up as a dynamic sculptural presence.

Outdoor



4101
25 x 81 cm




4106
25 x 43 cm



4108
48 x 38 cm

4101



Finishes
● **80/ __ Concrete**
(Natural finish)

LED Colour Temperature
/1_ 2700 K - 710 lm

CRI >80

Control
4101 __ / 10 On/ Off


Materials
Body: Steel.
Head: Concrete.
Base: Concrete.
Diffuser: PMMA.

Light Source and electronics
1 x LED 6,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,88 x 0,35 x 0,34 m
Vol 0,1032 m³
Gross weight 38,9 Kg Net weight 35,01 Kg

4106



Finishes
● **80/ __ Concrete**
(Natural finish)

LED Colour Temperature
/1_ 2700 K - 710 lm

CRI >80

Control
4106 __ / 10 On/ Off


Materials
Head: Concrete.
Base: Concrete.
Diffuser: PMMA.

Light Source and electronics
1 x LED 6,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,88 x 0,35 x 0,34 m
Vol 0,0598 m³
Gross weight 21,5 Kg Net weight 19,35 Kg

4108



Finishes
 ● 22/ _ _ Graphite Black
 (NCS S 8000-N)

LED Colour Temperature
 /1 _ 2700 K - 2500 lm

 CRI >80

Control
 4108 22 / 10 On/ Off

Materials
 Body: Steel.
 Diffuser: PMMA.

Light Source and electronics
 2 x LED Strip 9,2 W 400 mA
 Constant Current 400 mA
 220-240V 50/60Hz

Packaging
 1 Box 0,49 x 0,51 x 0,52 m
 Vol 0,1312 m³
 Gross weight 6,6 Kg Net weight 16 Kg




Break Plus

Design by Xuclà

Designed to blend instinctively with the architecture in which it exists, Break Plus converts any wall into a three dimensional mural. Arranged individually or as a group, it consists of four geometric volumes that cast beams of diffuse light upwards, downwards -or in both directions- creating a dynamic dialogue between light and shadow.

Outdoor

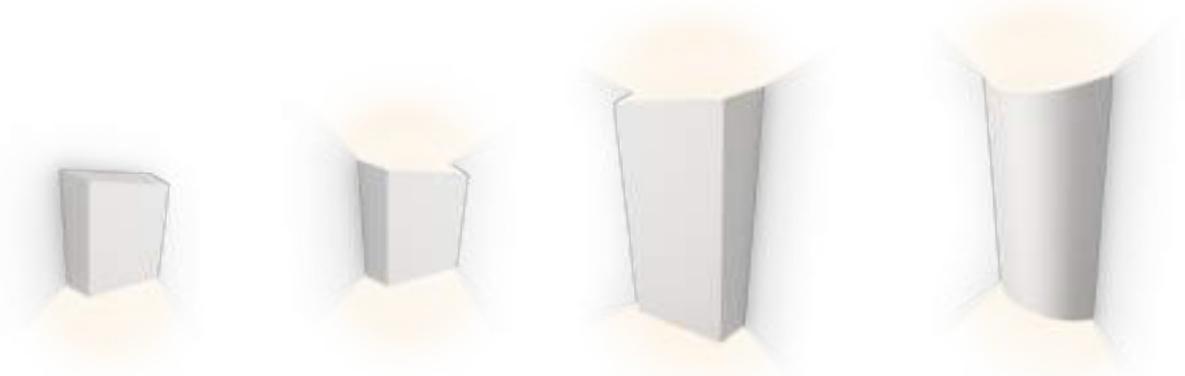


4112
12 x 14 cm

4114
12 x 14 cm

4116
21 x 34 cm

4118
19 x 32 cm

4112



- Finishes**
- **22/** __ Graphite Black (NCS S 8000-N)
 - **25/** __ Beige D1 (NCS S 4005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **95/** __ Primer (NCS S 1000-N)

LED Colour Temperature

/1_ 2700 K - 113 lm
 F

/3_ 3500 K - 146 lm
 D

CRI >90

Control

4112 __ / __

__ / __ **0** On/ Off

__ / __ **1_30** DALI-2 (Remote)

__ / __ **Z_30** Casambi (Remote)

Materials

Body: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 1W 350 mA
 Constant Current 350 mA
 100~240Vac. 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 0,23 m
 Vol 0,0030 m³
 Gross weight 1 Kg Net weight 0,610 Kg


Notes

4112 __ / __ 0: On/ Off **Multi-volt**

4112 __ / __ 1_30: DALI-2 **Bi-volt**

LED **IP65** **CE** **UK** **ERAC**

4114



- Finishes**
- **22/** __ Graphite Black (NCS S 8000-N)
 - **25/** __ Beige D1 (NCS S 4005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **95/** __ Primer (NCS S 1000-N)

LED Colour Temperature

/1_ 2700 K - 227 lm
 F

/3_ 3500 K - 292 lm
 D

CRI >90

Control

4114 __ / __

__ / __ **0** On/ Off

__ / __ **1_30** DALI-2 (Remote)

__ / __ **Z_30** Casambi (Remote)

Materials

Body: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 1W 350 mA
 Constant Current 350 mA
 100~240Vac. 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 0,23 m
 Vol 0,0030 m³
 Gross weight 1 Kg Net weight 0,590 Kg

Notes


4114 __ / __ 0: On/ Off **Multi-volt**

4114 __ / __ 1_30: DALI-2 **Bi-volt**

LED **IP65** **CE** **UK** **ERAC**



4116



- Finishes**
- **22/** __ Graphite Black (NCS S 8000-N)
 - **25/** __ Beige D1 (NCS S 4005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **95/** __ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 707 lm
G →

/3 _ 3500 K - 925 lm
F →

CRI >90

Control

4116 __ / __

__ / _ **0** On/ Off

__ / _ **1 30** DALI-2 (Remote)

__ / _ **Z 30** Casambi (Remote)

Materials

Body: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 4W 350 mA
 Constant Current 350 mA
 100-240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m
 Vol 0,0120 m³
 Gross weight 3,2 Kg Net weight 2,2 Kg


Notes

4116 __ / _ **0**: On/ Off **Multi-volt**

4116 __ / _ **1 30**: DALI-2 **Bi-volt**



4118



- Finishes**
- **22/** __ Graphite Black (NCS S 8000-N)
 - **25/** __ Beige D1 (NCS S 4005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **95/** __ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 707 lm
G →

/3 _ 3500 K - 925 lm
F →

CRI >90

Control

4118 __ / __

__ / _ **0** On/ Off

__ / _ **1 30** DALI-2 (Remote)

__ / _ **Z 30** Casambi (Remote)

Materials

Body: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 4W 350 mA
 Constant Current 350 mA
 100-240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m
 Vol 0,0120 m³
 Gross weight 3,2 Kg Net weight 1,71 Kg

Notes

4118 __ / _ **0**: On/ Off **Multi-volt**

4118 __ / _ **1 30**: DALI-2 **Bi-volt**



Empty


Design by Xuclà

Empty, lends itself to Vibia's 'furniture meets light' concept. Incorporating a table, stool and light fixture into a single three-dimensional entity, each geometric structure glows with subtle, indirect light from an invisible source.

Outdoor



4125



- Finishes**
- 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)
 - 22/ __ Graphite Black (NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 664 lm
/3 _ 3500 K - 1247 lm

LED

CRI >80 CRI >90

Control

4125 __ / _ 0 On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 8,6 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging


1 Box 0,56 x 0,50 x 0,50 m
Vol 0,176 m³
Gross weight 40 Kg Net weight 36 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED **IP66** **CE** **UK** **ERC** **Multi-volt**

4130



- Finishes**
- 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)
 - 22/ __ Graphite Black (NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 664 lm
/3 _ 3500 K - 1247 lm

LED

CRI >80 CRI >90

Control

4130 __ / _ 0 On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 8,6 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,81 m
Vol 0,254 m³
Gross weight 54,7 Kg Net weight 49,7 Kg


Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED **IP66** **CE** **UK** **ERC** **Multi-volt**



4135



Finishes

- 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)
- 22/ __ Graphite Black (NCS S 8000-N)

LED Colour Temperature

- /1_ 2700 K - 304 lm
 - /3_ 3500 K - 1247 lm
- 6
- CRI >80 CRI >90

Control

4135 __ / _ 0 On/ Off

Materials

Body: Polymer concrete.
 Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 4,3 W
 Constant Voltage 24V
 100-240V 50/60Hz

Packaging


1 Box 0,36 x 0,36 x 0,36 m
 Vol 0,04 m³
 Gross weight 12,2 Kg Net weight 10,4 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.



4136



Finishes

- 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)
- 22/ __ Graphite Black (NCS S 8000-N)

LED Colour Temperature

- /1_ 2700 K - 304 lm
 - /3_ 3500 K - 1247 lm
- 6
- CRI >80 CRI >90

Control

4136 __ / _ 0 On/ Off

Materials

Body: Polymer concrete.
 Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 4,3 W
 Constant Voltage 24V
 100-240V 50/60Hz

Packaging

1 Box 0,36 x 0,36 x 0,65 m
 Vol 0,084 m³
 Gross weight 22 Kg Net weight 19 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.



Out

Design by Víctor Carrasco

A romantic response to the global transition to life outside, Out brings the intimacy of indoor lighting outdoors. Suitable for illuminating a table or meeting point, this luminaire emanates with a soft, diffuse downlight, its source obscured by a translucent screen.

Floor Outdoor



4270 Not Fixed
211 x 242 cm



4275 Bolt-down "hard wired"
211 x 242 cm

4270

Finishes

- **22/** _ _ Graphite Black
(NCS S 8000-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **25/** _ _ Beige D1
(NCS S 4005-Y50R)
- **36/** _ _ Soft Pink
(NCS S 1010-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **47/** _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1_ 2700 K - 1300 lm



CRI >90


Control

4270 _ _ / _ _

_ _ / _ _ 5 Push

_ _ / _ _ Y ProtoPixel*

_ _ / _ _ Z Casambi



Materials

Tube: Stainless Steel.
Shades: Aluminum.
Diffuser: PE- Polyethylene.

Light Source and electronics

1 x LED 12,4 W 700 mA
Constant Voltage 24V 1.0A
220-240V. 50/60Hz

Packaging

5 Boxes
Box 1: 0,17 x 0,39 x 0,51 m
Box 2: 0,17 x 0,39 x 0,51 m
Box 3: 0,60 x 0,60 x 0,27 m
Box 4: 0,72 x 0,72 x 0,32 m
Box 5: 2,40 x 2,10 x 0,1 m
Total Vol 0,835 m³
Gross weight 84 Kg Net weight 49,5 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Switch on the cable. Electric cable 4 m.






4275

- Finishes**
- **22/** _ _ Graphite Black (NCS S 8000-N)
 - **23/** _ _ Warm White (NCS S 0502-Y50R)
 - **25/** _ _ Beige D1 (NCS S 4005-Y50R)
 - **36/** _ _ Soft Pink (NCS S 1010-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 1300 lm
 [F] >

CRI >90

Control
4275 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ Z _ 30 Casambi (Remote)



Materials
 Tube: Stainless Steel.
 Shades: Aluminum.
 Diffuser: PE- Polyethylene.

Light Source and electronics
 1 x LED 12,4 W 700 mA
 Constant Current 700 mA
 220~240V. 50/60Hz

Packaging
 5 Boxes
 Box 1: 0,17 x 0,39 x 0,51 m
 Box 2: 0,17 x 0,39 x 0,51 m
 Box 3: 0,60 x 0,60 x 0,27 m
 Box 4: 0,72 x 0,72 x 0,32 m
 Box 5: 2,40 x 2,10 x 0,1 m
 Total Vol 0,835 m³
 Gross weight 84 Kg Net weight 49,5 Kg

Notes
 4275 _ _ / _ 1: DALI-2 [Bi-volt]
 Bolt-down "hard wired"



Up


Design by Ramos & Bassols

Inspired by the neoclassical cornice, Up's geometric form protrudes from the ceiling with a quiet elegance. Its broad flat diffuser and refined rim create the illusion of daylight passing through an opening in the ceiling.

Ceiling



4440



- Finishes**
- 18/ __ Graphite (RAL 7016)
 - 93/ __ White (RAL 9016)

LED Colour Temperature

Static White
/1_ 2700 K - 2207 lm
F

Tunable White
/8_ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F
CRI >90

Control

4440 __ / __

__ / **A** Static White + Push; 1-10V; DALI-2

__ / **Z** Static White + Casambi

__ / **81** Tunable White + DALI-2 DT8

__ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate. Body: Aluminum. Ceiling support: Steel.

Light Source and electronics


1 x LED PLATE 26,5 W 500 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging

1 Box 0,17 x 0,55 x 0,55 m
Vol 0,0514 m³
Gross weight 11 Kg Net weight 7,5 Kg



4442



- Finishes**
- 18/ __ Graphite (RAL 7016)
 - 93/ __ White (RAL 9016)

LED Colour Temperature

Static White
/1_ 2700 K - 3959 lm
F

Tunable White
/8_ (2200 K - 4000 K)
3138 lm - 4238 lm
G - F
CRI >90

Control

4442 __ / __

__ / **A** Static White + Push; 1-10V; DALI-2

__ / **Z** Static White + Casambi

__ / **81** Tunable White + DALI-2 DT8

__ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate. Body: Aluminum. Ceiling support: Steel.

Light Source and electronics


1 x LED PLATE 55,3 W 500 mA
Constant Current 500 mA
110-240V 50/60Hz

Packaging

1 Box 0,17 x 0,90 x 0,90 m
Vol 0,1377 m³
Gross weight 13 Kg Net weight 15 Kg



4452



- Finishes
- 18/ _ _ Graphite (RAL 7016)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1_ 2700 K - 3957 lm
F

Tunable White
/8_ (2200 K - 4000 K)
4355 lm - 5744 lm
G - F
CRI >90

Control

4452 _ _ / _ _

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8Z Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.


Light Source and electronics
1 x LED PLATE 50 W 900 mA
Constant Current 900 mA
110-240V 50/60Hz

Packaging

1 Box 0,17 x 0,42 x 1,31 m
Vol 0,0924 m³
Gross weight 14 Kg Net weight 12 Kg



4454



- Finishes
- 18/ _ _ Graphite (RAL 7016)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1_ 2700 K - 3957 lm
F

Tunable White
/8_ (2200 K - 4000 K)
5050 lm - 5039 lm
G - F
CRI >90

Control

4454 _ _ / _ _

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8Z Tunable White +
Casambi


Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.


Light Source and electronics
1 x LED PLATE 50 W 900 mA
Constant Current 900 mA
110-240V 50/60Hz

Packaging

1 Box 0,17 x 0,73 x 0,73 m
Vol 0,0905 m³
Gross weight 14 Kg Net weight 13 Kg



4460



- Finishes
- 18/ _ _ Graphite (RAL 7016)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1_ 2700 K - 3957 lm
G

Tunable White
/8_ (2200 K - 4000 K)
5039 lm - 6699 lm
G - F
CRI >90

Control

4460 _ _ / _ _

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8Z Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics
1 x LED PLATE 26,5 W 500 mA
1 x LED PLATE 55,3W 750 mA
Constant Current 500 / 750 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1891 m³
Gross weight 24 Kg Net weight 23 Kg

Notes

Only one electric connection point



Origami

Design by Ramón Esteve

Recalling the folded paper of the Japanese art form for which it's named, Origami generates a stunning play of light and shadows. Composed of two architectural modules that be arranged in countless personalized designs, it creates the effect of climbing ivy along a blank expanse of wall.

Wall Outdoor

4500

30 x 30 cm



4501

30 x 30 cm




4504

53 x 63cm




4506

70 x 91 cm

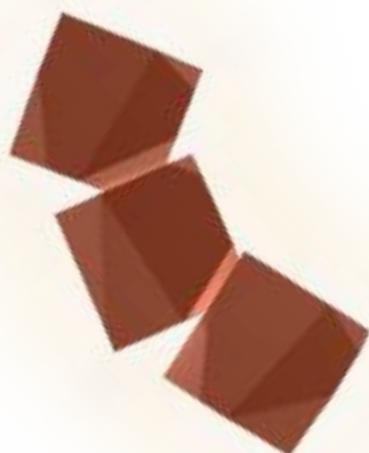



4508

94 x 107 cm

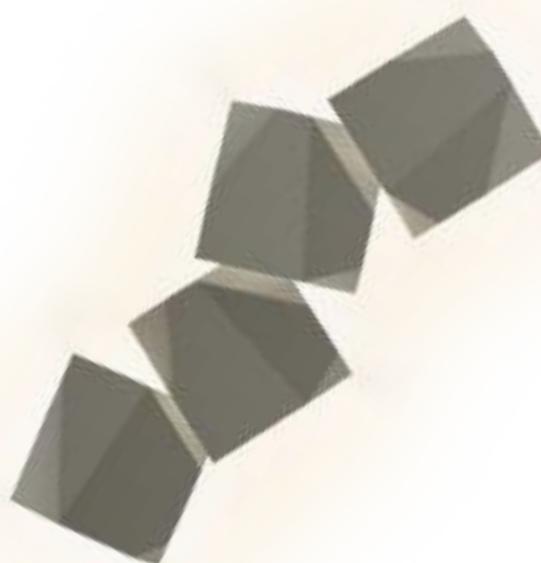

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Origami composition quick and easy at vibia.com

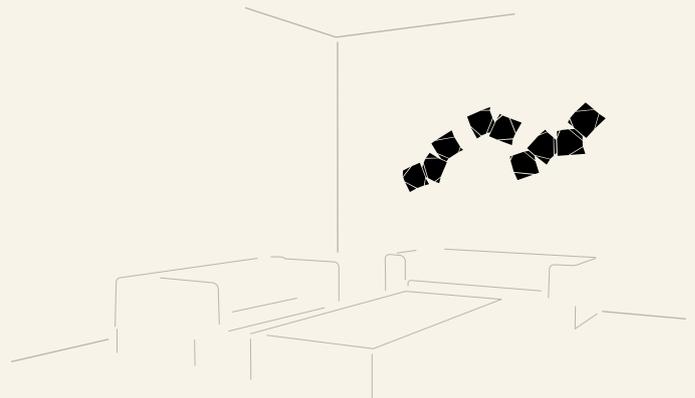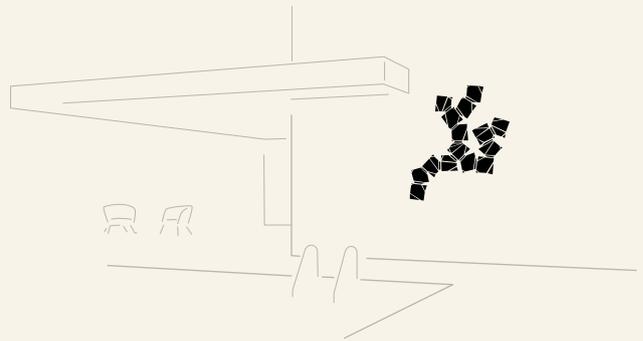

4500

Finishes


- 10/ __ White (NCS S 0300-N)
- 29/ __ Brown D1 (NCS S 8005-Y50R)
- 38/ __ Terra Dark (NCS S 5040-Y70R)
- 53/ __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 756 lm
- /3 _ 3500 K - 799 lm
- CRI >90

Control

4500 __ / _ 4 TRIAC



Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

1 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110-277V 50/60Hz

Packaging


1 Box 0,35 x 0,35 x 0,12 m
Vol 0,0150 m³
Gross weight 1,5 Kg Net weight 1 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 CE ENEC EAC Multi-volt

4501



Finishes

- **10/** __ White (NCS S 0300-N)
- **29/** __ Brown D1 (NCS S 8005-Y50R)
- **38/** __ Terra Dark (NCS S 5040-Y70R)
- **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 756 lm 
- /3 _ 3500 K - 799 lm 

CRI >90

Control
4501 __ / __ 4 TRIAC

Materials
Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.


Light Source and electronics
1 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110-277V 50/60Hz

Packaging
1 Box 0,35 x 0,35 x 0,12 m
Vol 0,0150 m³
Gross weight 1,5 Kg Net weight 1 Kg

Notes
A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

4504



Finishes

- **10/** __ White (NCS S 0300-N)
- **29/** __ Brown D1 (NCS S 8005-Y50R)
- **38/** __ Terra Dark (NCS S 5040-Y70R)
- **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 1512 lm 
- /3 _ 3500 K - 1598 lm 

CRI >90

Control
4504 __ / __ 4 TRIAC

Materials
Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.


Light Source and electronics
2 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110-277V 50/60Hz

Packaging
1 Box 0,64 x 0,40 x 0,22 m
Vol 0,0563 m³
Gross weight 4,05 Kg Net weight 2,15 Kg

Notes
A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

4506



Finishes

- **10/** __ White (NCS S 0300-N)
- **29/** __ Brown D1 (NCS S 8005-Y50R)
- **38/** __ Terra Dark (NCS S 5040-Y70R)
- **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 2269 lm 
- /3 _ 3500 K - 2397 lm 

CRI >90

Control
4506 __ / __ 4 TRIAC

Materials
Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.


Light Source and electronics
3 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110-277V 50/60Hz

Packaging
1 Box 0,95 x 0,40 x 0,22 m
Vol 0,0836 m³
Gross weight 5,33 Kg Net weight 3,23 Kg

Notes
A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

4508



- Finishes**
- 10/ _ _ White (NCS S 0300-N)
 - 29/ _ _ Brown D1 (NCS S 8005-Y50R)
 - 38/ _ _ Terra Dark (NCS S 5040-Y70R)
 - 53/ _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1_ 2700 K - 3025 lm
D >

/3_ 3500 K - 3196 lm
E >

CRI >90

Control

4508 _ _ / _ 4 TRIAC

Materials

Shade: ABS.
 Diffuser: PC- Polycarbonate.
 Lid: PC- Polycarbonate.
 Arm: PC- Polycarbonate.

Light Source and electronics

4 x LED STRIP 6,3 W 350 mA
 Constant Current 350 mA
 110-277V 50/60Hz

Packaging

1 Box 1,25 x 0,40 x 0,22 m
 Vol 0,1100 m³
 Gross weight 7,2 Kg Net weight 6,48 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 CE UK ENEC ENEC Multi-volt



Palo Alto

Design by Xuclà

Palo Alto is defined by a linear, angular silhouette. Industrial in style yet natural in form, it recalls a tree whose steel "branches" are embedded with LEDs, illuminating the surrounding landscape with a diffuse downlight.

Outdoor



4510

35 x 90 cm

4516

85 x 280 cm

4539

85 x 310 cm

4540

136 x 310 x 161 cm

4510



Finishes

- 22/ __ Graphite Black (NCS S 8000-N)
- 29/ __ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 179 lm
/3 _ 3500 K - 179 lm
G
CRI >90

Control

4510 __ / _ 0 On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics


2 x LED 2,2 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,44 x 0,40 x 1,10 m
Vol 0,2080 m³
Gross weight 11,1 Kg Net weight 10 Kg

LED IP65 CE UK ENEC Bi-volt

4516



Finishes

- 22/ __ Graphite Black (NCS S 8000-N)
- 29/ __ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 1044 lm
/3 _ 3500 K - 1045 lm
G
CRI >90

Control

4516 __ / _ 0 On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics


1 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,32 x 0,32 x 2,64 m
Vol 0,2703 m³
Gross weight 18,4 Kg Net weight 16,5 Kg

LED IP65 CE UK ENEC Multi-volt

4539



- Finishes**
- 22/ _ _ Graphite Black (NCS S 8000-N)
 - 29/ _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2089 lm
/3 _ 3500 K - 2089 lm

LED 

CRI >90

Control

4539 _ _ / _ 0 On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics


2 x LED MODULE 24V 15 W
Constant Voltage 24V
100-240V 50/60Hz

Packaging

1 Box 0,37 x 0,37 x 2,61 m
Vol 0,3570 m³
Gross weight 46,4 Kg Net weight 41,76 Kg

LED  **IP65**  **CE**  **RoHS**  **Multi-volt**

4540

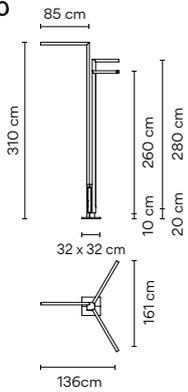

- Finishes**
- 22/ _ _ Graphite Black (NCS S 8000-N)
 - 29/ _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3134 lm
/3 _ 3500 K - 3134 lm

LED 

CRI >90

Control

4540 _ _ / _ 0 On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics

3 x LED MODULE 24V 15 W
Constant Voltage 24V
100-240V 50/60Hz

Packaging

1 Box 0,40 x 0,44 x 2,64 m
Vol 0,4646 m³
Gross weight 55,4 Kg Net weight 49,86 Kg

LED  **IP65**  **CE**  **UK**  **RoHS**  **Multi-volt**



Brisa

Design by Lievore, Altherr, Molina

Inspired by the forest blue bellflower,
Brisa is the essence of flawless landscape integration.
Its stylised silhouette and natural inspiration bring
a subtle charm to any exterior.

Outdoor



4625
10 x 103 cm



4630
10 x 100 cm




4635
22 x 99,5 x 23 cm



4640
30 x 100 x 27,5 cm

4625



Finishes

- 07/ _ Khaki (RAL 7039)
- 54/ _ Oxide (RAL 8014)

LED Colour Temperature

/1_ 2700 K - 181 lm

G

/3_ 3500 K - 193 lm

F

CRI >90

Control

4625 _ _ / _ 0 On/ Off

Materials

Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


1 Box 0,16 x 0,16 x 1,6 m
Vol 0,0409 m³
Gross weight 1,8 Kg Net weight 1,3 Kg

Notes

Spike. Surface

LED  IP64      Bi-volt

4630



- Finishes
- 07/ __ Khaki (RAL 7039)
 - 54/ __ Oxide (RAL 8014)

LED Colour Temperature

- /1 _ 2700 K - 543 lm
- [G]
- /3 _ 3500 K - 581 lm
- [F]
- CRI >90

Control

4630 __ / _ 0 On/ Off

Materials

Shade and Base: Aluminum.
 Disc: Stainless steel.
 Vertical tube: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
 Constant Current 700 mA
 100-240V 50/60Hz

Packaging


1 Box 0,16 x 0,16 x 1,6 m
 Vol 0,0409 m³
 Gross weight 2,6 Kg Net weight 2 Kg

Notes

Built-in



4635



- Finishes
- 07/ __ Khaki (RAL 7039)
 - 54/ __ Oxide (RAL 8014)

LED Colour Temperature

- /1 _ 2700 K - 906 lm
- [G]
- /3 _ 3500 K - 969 lm
- [F]
- CRI >90

Control

4635 __ / _ 0 On/ Off

Materials

Shade and Base: Aluminum.
 Disc: Stainless steel.
 Vertical tube: Steel.

Light Source and electronics

3 x LED 2,1 W 700 mA
 Constant Current 700 mA
 100-240V 50/60Hz

Packaging


1 Box 0,32 x 0,36 x 1,16 m
 Vol 0,1336 m³
 Gross weight 6,5 Kg Net weight 5,85 Kg

Notes

Built-in



4640



- Finishes
- 07/ __ Khaki (RAL 7039)
 - 54/ __ Oxide (RAL 8014)

LED Colour Temperature

- /1 _ 2700 K - 1268 lm
- [G]
- /3 _ 3500 K - 1357 lm
- [F]
- CRI >90

Control

4640 __ / _ 0 On/ Off

Materials

Shade and Base: Aluminum.
 Disc: Stainless steel.
 Vertical tube: Steel.

Light Source and electronics

5 x LED 2,1 W 700 mA
 Constant Current 700 mA
 100-240V 50/60Hz

Packaging

1 Box 0,32 x 0,36 x 1,16 m
 Vol 0,1336 m³
 Gross weight 6 Kg Net weight 4 Kg

Notes

Built-in



Dots

Design by Martín Azúa

A diminutive wall sconce delivers outsized impact in the form of simple, circular v. Seamlessly connecting a space with an intimate landscape of beams and halos, the collection creates a melody of light like a composition of musical notes in concert with another.

Wall



Ø 17,5 cm

Ajustable: 360° turn.
4662: On-off switch on the back plate.

4660 - 4662



Ø 17,5 cm

Once installed position is fixed and cannot be adjusted.

4665



Ø 17,5 cm

Ajustable: 360° turn.


4670



Ø 17,5 cm

4675

4660



- Finishes**
- 13/ __ Off-White (NCS S 1000-N)
 - 27/ __ Brown L1 (NCS S 1505-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1_ 2700 K - 482 lm
/3_ 3500 K - 520 lm

F >

CRI >90

Control

4660 __ / __

__ / _ 0 On/ Off
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 4 TRIAC

- Finishes**
- 82/ __ White oak
 - 83/ __ American walnut

LED Colour Temperature

/1_ 2700 K - 482 lm
/3_ 3500 K - 520 lm

F >

CRI >90

Control

4660 __ / __

__ / _ 0 On/ Off
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 4 TRIAC

Materials

Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED 5,75 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz

Packaging


1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes

22° light halo



4662



- Finishes**
- 13/ __ Off-White (NCS S 1000-N)
 - 27/ __ Brown L1 (NCS S 1505-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1_ 2700 K - 482 lm
/3_ 3500 K - 520 lm

F >

CRI >90

Control

4662 __ / __

__ / _ 0 On/ Off
__ / _ 4 TRIAC

- Finishes**
- 82/ __ White oak
 - 83/ __ American walnut

LED Colour Temperature

/1_ 2700 K - 482 lm
/3_ 3500 K - 520 lm

F >

CRI >90

Control

4662 __ / __

__ / _ 0 On/ Off
__ / _ 4 TRIAC

Materials

Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics


1 x LED 5,75 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz

Packaging


1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes

22° light halo
Switch on the back plate



4665



- Finishes**
- 13/ __ Off-White (NCS S 1000-N)
 - 27/ __ Brown L1 (NCS S 1505-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1 _ 2700 K - 482 lm
 /3 _ 3500 K - 412 lm
 F
 CRI >90

Control
 4665 __ / _ 0 On/ Off


Materials
 Body: ABS.
 Diffuser: PC- Polycarbonate.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED 5,75 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Packaging
 1 Box 0,13 x 0,22 x 0,21 m
 Vol 0,0062 m³
 Gross weight 0,65 Kg Net weight 0,4 Kg



4670



- Finishes**
- 13/ __ Off-White (NCS S 1000-N)
 - 27/ __ Brown L1 (NCS S 1505-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1 _ 2700 K - 482 lm
 /3 _ 3500 K - 412 lm
 F
 CRI >90

Control
 4670 __ / __
 __ / _ 0 On/ Off
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ 4 TRIAC

- Finishes**
- 82/ __ White oak
 - 83/ __ American walnut

LED Colour Temperature
 /1 _ 2700 K - 482 lm
 /3 _ 3500 K - 412 lm
 F
 CRI >90

Control
 4670 __ / __
 __ / _ 0 On/ Off
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ 4 TRIAC



Materials
 Body: ABS / Wood.
 Diffuser: PC- Polycarbonate.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED 5,75 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Packaging
 1 Box 0,13 x 0,22 x 0,21 m
 Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
 Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
 Net weight 0,6 Kg



4675



- Finishes**
- **13/** __ Off-White (NCS S 1000-N)
 - **27/** __ Brown L1 (NCS S 1505-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **47/** __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 573 lm
E

/3 _ 3500 K - 515 lm
F

CRI >90

Control

4675 __ / __

__ / **0** On/ Off

__ / **1** DALI-2

__ / **3** 1-10V

__ / **4** TRIAC

- Finishes**
- **82/** __ White oak
 - **83/** __ American walnut

LED Colour Temperature

/1 _ 2700 K - 482 lm

/3 _ 3500 K - 515 lm
F

CRI >90

Control

4675 __ / __

__ / **0** On/ Off

__ / **1** DALI-2

__ / **3** 1-10V

__ / **4** TRIAC

Materials

Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 4,5 W 500 mA
Constant Current 500 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes

4675 __ / 0: On/ Off **Bi-volt**

LED IP20 CE UK ENEC ENEC



Dots Glass

Design by Martín Azúa

Sheathed in layers of transparent optical glass, the LED source within the fixture generates a warm, 360-degree glow, while the layering of the glass and aluminum at the edge of each disc creates a pulsating ambient effect.


Wall Outdoor



4680

Ø 20 cm

4680



Finishes

- 10/ __ White (NCS S 0300-N)

LED Colour Temperature

- /1_ 2700 K - 985 lm
- /3_ 3500 K - 1015 lm



CRI >90

Control

4680 __ / __

- __ / __ 0 On/ Off
- __ / __ 1 DALI-2
- __ / __ 3 1-10V
- __ / __ Z 30 Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: Optical Glass.

Light Source and electronics

1 x LED 10 W 500 mA
Constant Current 500 mA
100-240Vac 50/60Hz

Packaging

1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m³
Gross weight 1,8 Kg Net weight 2,2 Kg

Notes

4680 __ / __ 1: DALI-2 
4680 __ / __ 3: 1-10V 






Dots Outdoor


Design by Martín Azúa

Diminutive, compact and easily installed, Dots Outdoor is the perfect solution for subtle outdoor illumination. Designed to nestle discreetly into the undergrowth of a garden or patio, Dots shines at night with a diffuse or focused glow from an invisible source.

Outdoor

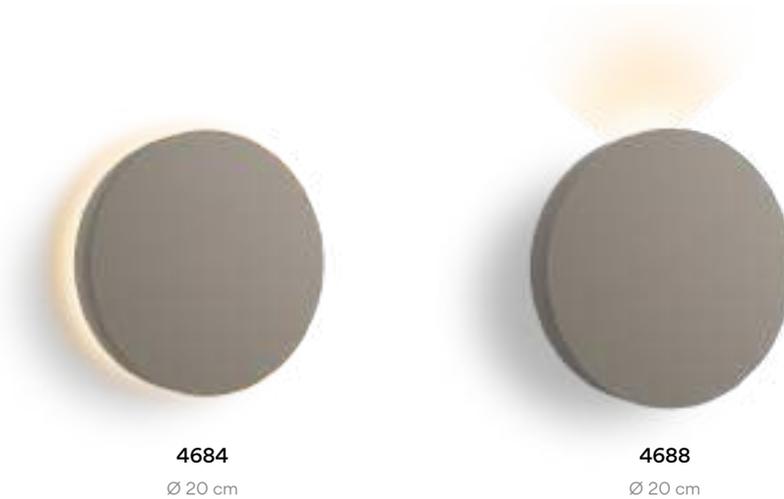

4684



- Finishes
- 22/ __ Graphite Black (NCS S 8000-N)
 - 25/ __ Beige D1 (NCS S 4005-Y50R)
 - 53/ __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 400 lm
/3 _ 3500 K - 412 lm

F

CRI >90

Control

4684 __ / __

- __ / _ 0 On/ Off
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ Z _ 30 Casambi (Remote)

Materials

Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,5 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging


1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m³
Gross weight 1,6 Kg Net weight 2,0 Kg

Notes

4684 __ / _ 0: On/ Off Bi-volt

LED IP66 CE UK ENEC

4688



- Finishes
- 22/ __ Graphite Black (NCS S 8000-N)
 - 25/ __ Beige D1 (NCS S 4005-Y50R)
 - 53/ __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 500 lm
/3 _ 3500 K - 515 lm

F

CRI >90

Control

4688 __ / __

- __ / _ 0 On/ Off
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ Z _ 30 Casambi (Remote)

Materials

Body: Aluminium.
Diffuser: Glass.

Light Source and electronics

1 x LED 5,75 W 500 mA
Constant Current 500 mA
100~277Vac 50/60Hz

Packaging

1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m³
Gross weight 1,7 Kg Net weight 2,1 Kg

Notes

4688 __ / _ 0: On/ Off Bi-volt

LED IP66 CE UK ENEC

Outdoor



4695
Ø 20 x 12 cm



4697
Ø 15 x 9 cm




4700
Ø 20 x 12 cm



4702
Ø 15 x 9 cm

4695



- Finishes**
- **22/** _ _ Graphite Black (NCS S 8000-N)
 - **25/** _ _ Beige D1 (NCS S 4005-Y50R)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1_ 2700 K - 750,2 lm
F
CRI >90

Control
4695 _ _ / _ _
_ _ / _ **0** On/ Off
_ _ / _ **1** _ **30** DALI-2 (Remote)
_ _ / _ **Z** _ **30** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED STRIP 7,8W 350 mA
Constant Current 350 mA
100~277V 50/60Hz

Packaging
1 Box 0,30 x 0,27 x 0,18 m
Vol 0,0146 m³
Gross weight 3,4 Kg Net weight 2,7 Kg

Notes
4695 _ _ / _ **0**: On/ Off
4695 _ _ / _ **1** _ **30**: DALI-2



4697



- Finishes**
- **22/** _ _ Graphite Black (NCS S 8000-N)
 - **25/** _ _ Beige D1 (NCS S 4005-Y50R)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1_ 2700 K - 375,9 lm
F
CRI >90

Control
4697 _ _ / _ _
_ _ / _ **0** On/ Off
_ _ / _ **1** _ **30** DALI-2 (Remote)
_ _ / _ **Z** _ **30** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED STRIP 4,6W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,24 x 0,20 x 0,13 m
Vol 0,0624 m³
Gross weight 1,9 Kg Net weight 1,5 Kg

Notes
4697 _ _ / _ **0**: On/ Off
4697 _ _ / _ **1** _ **30**: DALI-2



4700



- Finishes**
- 22/ __ Graphite Black (NCS S 8000-N)
 - 25/ __ Beige D1 (NCS S 4005-Y50R)
 - 53/ __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 1445 lm
 F

CRI >90

Control
 4700 __ / __

- __ / _ 0 On/ Off
- __ / _ 1 _ 30 DALI-2 (Remote)
- __ / _ Z _ 30 Casambi (Remote)

Materials
 Body: Aluminum.
 Diffuser: PC- Polycarbonate.


Light Source and electronics
 1 x LED STRIP 14,8W 350 mA
 Constant Current 350 mA
 100~277V 50/60Hz

Packaging
 1 Box 0,30 x 0,27 x 0,18 m
 Vol 0,0146 m³
 Gross weight 3,8 Kg Net weight 3,1 Kg

Notes
 4700 __ / _ 0: On/ Off Multi-volt
 4700 __ / _ 1 _ 30: DALI-2 Bi-volt



4702



- Finishes**
- 22/ __ Graphite Black (NCS S 8000-N)
 - 25/ __ Beige D1 (NCS S 4005-Y50R)
 - 53/ __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 1294 lm
 F

CRI >90

Control
 4702 __ / __

- __ / _ 0 On/ Off
- __ / _ 1 _ 30 DALI-2 (Remote)
- __ / _ Z _ 30 Casambi (Remote)

Materials
 Body: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics
 1 x LED STRIP 12,8W 300 mA
 Constant Current 300 mA
 100~277V 50/60Hz

Packaging
 1 Box 0,24 x 0,20 x 0,13 m
 Vol 0,0146 m³
 Gross weight 1,9 Kg Net weight 1,5 Kg

Notes
 4702 __ / _ 0: On/ Off Multi-volt
 4702 __ / _ 1 _ 30: DALI-2 Bi-volt
 4702 __ / _ Z _ 30: Casambi Bi-volt





Meridiano


Design by Jordi Vilardell & Meritxell Vidal

Composed of a structure of corrugated steel rods, Meridiano radiates with a burst of light and shadow that enriches its surrounding environment. As a floor lamp, it doubles up as outdoor furniture; as a wall sconce, it animates a bare façade with a dynamic sunburst motif.

Outdoor



4710
Ø 64 cm

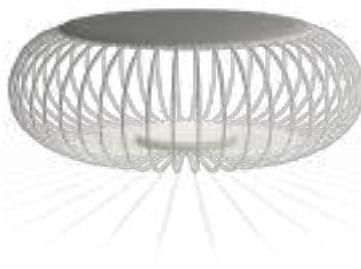

4715
Ø 92 cm



4720

4710



- Finishes**
- **07/** __ Khaki (RAL 7006)
 - **58/** __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1** _ 2700 K - 1269 lm
- /3** _ 3500 K - 1709 lm

CRI >90
CRI >80

Control
4710 __ / _ **0** On/ Off

Materials
Seat: PU- Polyurethane. Rods: Steel.
Arm: Steel. Diffuser: Glass.


Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,57 x 0,66 x 0,66 m
Vol 0,2483 m³
Gross weight 18,2 Kg Net weight 15,6 Kg

Notes
It can be connected with or without a plug.
Electric cable 2 m.



4715



- Finishes**
- **07/** __ Khaki (RAL 7006)
 - **58/** __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1** _ 2700 K - 1269 lm
- /3** _ 3500 K - 1709 lm

CRI >90
CRI >80

Control
4715 __ / _ **0** On/ Off

Materials
Seat: PU- Polyurethane. Rods: Steel.
Arm: Steel. Diffuser: Glass.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz


Packaging
1 Box 0,43 x 0,94 x 0,94 m
Vol 0,38 m³
Gross weight 20,1 Kg Net weight 16,7 Kg

Notes
It can be connected with or without a plug.
Electric cable 2 m.





4720



- Finishes**
- 07/ _ _ Khaki (RAL 7006)
 - 58/ _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
 D

CRI >90

/3 _ 3500 K - 1709 lm
 C

CRI >80

Control

4720 _ _ / _ 0 On/ Off

Materials
 Base: Steel.

Light Source and electronics
 1 x LED 9 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging
 1 Box 0,106 x 0,310 x 0,310 m
 Vol 0,102 m³
 Gross weight 1,5 Kg Net weight 1 Kg



June


Design by Ana Mir + Emili Padrós (Emiliana Design Studio)

Inspired by traditional lanterns, June's moon-like spheres cast a warm, ambient glow, lending a touch of nostalgia to an outdoor space.

Outdoor



4780



Finishes
● 54/ _ _ Brown
(Pantone Black U)

LED Colour Temperature
/1_ 2700 K - 95,5 lm
F
CRI >90

Control
4780 54 / 10 On/ Off

Materials
Diffuser: Opal blown glass.
Tubes: Steel.

Light Source and electronics
1 x LED 1 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz


Packaging
1 Box 1 x 0,4 x 0,4 m
Vol 0,16 m³
Gross weight 5 Kg Net weight 3 Kg

Notes
Built-in.

LED IP65 CE UK ENE Bi-volt



4785



Finishes
 ● 54/ _ _ Brown
 (Pantone Black U)

LED Colour Temperature
 /1_ 2700 K - 190,9 lm
 F
 CRI >90

Control
 4785 54 / 10 On/ Off

Materials
 Diffuser: Opal blown glass.
 Tubes: Steel.

Light Source and electronics
 2 x LED 1 W 350 mA
 Constant Current 350 mA
 100-240V 50/60Hz

Packaging
 1 Box 1,5 x 0,4 x 0,4 m
 Vol 0,24 m³
 Gross weight 6 Kg Net weight 4 Kg

Notes
 Built-in.

LED IP65 CE ENEC EAC Bi-volt

Bamboo

Design by Antoni Arola & Enric Rodríguez

Bamboo's lean, natural form perfectly lends itself to an outdoor setting. Studded with LEDs, it seamlessly integrates with the landscape while adding a wash of light to walkways and common spaces.

Outdoor



4820

19 x 6 cm



4800 4802

6 x 60 cm

4801 4803

6 x 90 cm

4804

6 x 190 cm

4805

6 x 270 cm

4810

Ø 43 x 190 cm


4811

Ø 35 x 270 cm

4812

Ø 40 x 270 cm

4800



Finishes

- **07/** __ Khaki (RAL 7006)
- **54/** __ Oxide (RAL 8017)
- **58/** __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1_ 2700 K - 181,2 lm
 - /3_ 3500 K - 181,2 lm
- ☐ **G** ☐
- CRI >90

Control

4800 __ / __ **0** On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


1 Box 0,125 x 0,125 x 1,3 m
Vol 0,0203 m³
Gross weight 4 Kg Net weight 3,6 Kg

Notes

Surface



4801



Finishes	LED Colour Temperature
● 07/ __ Khaki (RAL 7006)	/1 _ 2700 K - 362,4 lm
● 54/ __ Oxide (RAL 8017)	/3 _ 3500 K - 362,4 lm
● 58/ __ Off-white (PANTONE WARM GRAY 2U)	CRI >90

Control
4801 __ / __ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 6 Kg

Notes
Surface

LED IP66 Bi-volt

4802



Finishes	LED Colour Temperature
● 07/ __ Khaki (RAL 7006)	/1 _ 2700 K - 181,2 lm
● 54/ __ Oxide (RAL 8017)	/3 _ 3500 K - 181,2 lm
● 58/ __ Off-white (PANTONE WARM GRAY 2U)	CRI >90

Control
4802 __ / __ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0480 m³
Gross weight 7 Kg Net weight 5,5 Kg

Notes
Built-in

LED IP66 Multi-volt

4803



Finishes	LED Colour Temperature
● 07/ __ Khaki (RAL 7006)	/1 _ 2700 K - 362,4 lm
● 54/ __ Oxide (RAL 8017)	/3 _ 3500 K - 362,4 lm
● 58/ __ Off-white (PANTONE WARM GRAY 2U)	CRI >90

Control
4803 __ / __ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 5,8 Kg

Notes
Built-in

LED IP66 Multi-volt

4804



Finishes

- 07/ __ Khaki (RAL 7006)
- 54/ __ Oxide (RAL 8017)
- 58/ __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1 _ 2700 K - 543,7 lm
- /3 _ 3500 K - 543,7 lm

Control

4804 __ / __ 0 On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,0480 m³
Gross weight 8 Kg Net weight 6,5 Kg

Notes

Built-in

LED ⊕ IP66 CE UK ENEC EAC Bi-volt

4805



Finishes

- 07/ __ Khaki (RAL 7006)
- 54/ __ Oxide (RAL 8017)
- 58/ __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1 _ 2700 K - 724,9 lm
- /3 _ 3500 K - 724,9 lm

Control

4805 __ / __ 0 On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

4 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,0600 m³
Gross weight 9 Kg Net weight 7 Kg

Notes

Built-in

LED ⊕ IP66 CE UK ENEC EAC Bi-volt

4810



Finishes

- 07/ __ Khaki (RAL 7006)
- 54/ __ Oxide (RAL 8017)
- 58/ __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1 _ 2700 K - 906,1 lm
- /3 _ 3500 K - 906,1 lm

Control

4810 __ / __ 0 On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

5 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,1388 m³
Gross weight 15 Kg Net weight 12,5 Kg

Notes

Built-in

LED ⊕ IP66 CE UK ENEC EAC Bi-volt

4811



Finishes

- 07/ __ Khaki (RAL 7006)
- 54/ __ Oxide (RAL 8017)
- 58/ __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1 _ 2700 K - 1268,5 lm
- /3 _ 3500 K - 1268,5 lm

Control

4811 __ / __ 0 On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

7 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


3 Boxes
Total Vol 1,660 m³
Gross weight 16,5 Kg Net weight 13 Kg

Notes

Built-in

LED ⊕ IP66 CE UK ENEC EAC Multi-volt

4812

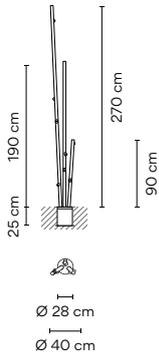

Finishes	LED Colour Temperature
● 07/ __ Khaki (RAL 7006)	/1_ 2700 K - 1631,0 lm
● 54/ __ Oxide (RAL 8017)	/3_ 3500 K - 1631,0 lm
● 58/ __ Off-white (PANTONE WARM GRAY 2U)	LED
	CRI >90

Control
4812 __ / __ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
9 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging
4 Boxes
Total Vol 0,1854 m³
Gross weight 21,6 Kg Net weight 19,44 Kg

Notes
Built-in

LED IP66 CE UK ENEC Multi-volt

4815



Finishes
● **18** Polymer concrete (NCS S 2002-B50G)


4815 18

Materials
Base: Polymer concrete.

Packaging
1 Box 0,40 x 0,50 x 0,50 m
Vol 0,1000 m³
Gross weight 39 Kg Net weight 35 Kg

Notes
Surface installation accessory.
For ref. 4810. 4811. 4812

4820



Finishes	LED Colour Temperature
● 07/ __ Khaki (RAL 7006)	/1_ 2700 K - 181,2 lm
● 54/ __ Oxide (RAL 8017)	/3_ 3500 K - 181,2 lm
● 58/ __ Off-white (PANTONE WARM GRAY 2U)	LED
	CRI >90

Control
4820 __ / __
__ / __ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging
1 Box 0,25 x 0,10 x 0,10 m
Vol 0,0025 m³
Gross weight 2 Kg Net weight 1 Kg

Notes
Surface

LED IP66 CE UK ENEC Bi-volt

Duo

Design by Ramos & Bassols

Duo brings natural warmth to a space. Its gently curved form encases a supple wood-finished interior, lending a soothing sensibility.

Ceiling

4870

Ø 47,5 cm



4872

Ø 78,5 cm



4874

Ø 35 cm



4878

Ø 70 cm



4876

Ø 35 cm



4880

Ø 70 cm



4870

Finishes

- **18/** __ Graphite (Adapta RF9913WX)
- **58/** __ Cream (RAL 7044)
- **93/** __ White (RAL 9016)


Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F >>>
CRI >90 **CRI** >80
Tunable White
/8 _ (2200 K - 4000 K)
 1901 lm - 2461 lm
G >>> - **F** >>>
CRI >90

Control

4870 __ / __
 __ / **A** Static White + Push; 1-10V; DALI-2
 __ / **Z** Static White + Casambi
 __ / **81** Tunable White + DALI-2 DT8
 __ / **8Z** Tunable White + Casambi



Materials

Diffuser: PC- Polycarbonate.
 Main Body: Aluminum.
 Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging


1 Box 0,56 x 0,56 x 0,26 m
 Vol 0,0815 m³
 Gross weight 7 Kg Net weight 6 Kg

Notes

4870 __ / **A**: Static White + Push; 1-10V; DALI-2 **Bi-volt**
 4870 __ / **81**: Tunable White + DALI-2 DT8 **Multi-volt**



4872



- Finishes**
- 18/ __ Graphite (Adapta RF9913WX)
 - 58/ __ Cream (RAL 7044)
 - 93/ __ White (RAL 9016)

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

LED Colour Temperature

Static White
 /1 _ 2700 K - 3959 lm
 F

/3 _ 3500 K - 4133 lm
 E

Tunable White
 /8 _ (2200 K - 4000 K)
 3138 lm - 4238 lm
 G - F
 CRI >90

Control

4872 __ / __

__ / _ A Static White +
 Push; 1-10V; DALI-2

__ / _ Z Static White + Casambi

__ / _ 81 Tunable White +
 DALI-2 DT8

__ / _ 8Z Tunable White +
 Casambi

Materials

Diffuser: PC- Polycarbonate.
 Main Body: Aluminum.
 Inner structure: Oak wood.


Light Source and electronics
 1 x LED PLATE 50 W 500 mA
 Constant Current 750 mA
 110-240V 50/60Hz

Packaging

1 Box 0,9 x 0,9 x 0,25 m
 Vol 0,2025 m³
 Gross weight 19 Kg Net weight 17 Kg



4874



- Finishes**
- 18/ __ Graphite (Adapta RF9913WX)
 - 58/ __ Cream (RAL 7044)
 - 93/ __ White (RAL 9016)

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

LED Colour Temperature

Static White
 /1 _ 2700 K - 644 lm
 /3 _ 3500 K - 632 lm
 G

Tunable White
 /8 _ (2200 K - 4000 K)
 1244 lm - 1582 lm
 G - F
 CRI >90

Control

4874 __ / __

__ / _ 1 Static White + DALI-2

__ / _ B Static White + Push; 1-10V

__ / _ Z Static White + Casambi

__ / _ 81 Tunable White +
 DALI-2 DT8

__ / _ 8Z Tunable White +
 Casambi

Materials

Diffuser: PC- Polycarbonate.
 Main Body: Aluminum.
 Inner structure: Oak wood.

Light Source and electronics
 1 x LED PLATE 12 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
 Vol 0,0678 m³
 Gross weight 5 Kg Net weight 4 Kg

Notes


4874 __ / _ 1: Static White + DALI-2 **Bi-volt**

4874 __ / _ B: Static White + Push; 1-10V **Bi-volt**

4874 __ / 81: Tunable White + DALI-2 DT8 **Multi-volt**



4876



- Finishes**
- 18/ __ Graphite (Adapta RF9913WX)
 - 58/ __ Cream (RAL 7044)
 - 93/ __ White (RAL 9016)

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

LED Colour Temperature

Static White
 /1 _ 2700 K - 644 lm
 /3 _ 3500 K - 632 lm
 G

Tunable White
 /8 _ (2200 K - 4000 K)
 1244 lm - 1582 lm
 G - F
 CRI >90

Control

4876 __ / __

__ / _ 1 Static White + DALI-2

__ / _ B Static White + Push; 1-10V

__ / _ Z Static White + Casambi

__ / _ 81 Tunable White +
 DALI-2 DT8

__ / _ 8Z Tunable White +
 Casambi

Materials

Diffuser: PC- Polycarbonate.
 Main Body: Aluminum.
 Inner structure: Oak wood.

Light Source and electronics
 1 x LED PLATE 12 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
 Vol 0,0678 m³
 Gross weight 5 Kg Net weight 4 Kg

Notes


4876 __ / _ 1: Static White + DALI-2 **Bi-volt**

4876 __ / _ B: Static White + Push; 1-10V **Bi-volt**

4876 __ / 81: Tunable White + DALI-2 DT8 **Multi-volt**



4878



Finishes

- **18/** __ Graphite (Adapta RF9913WX)
- **58/** __ Cream (RAL 7044)
- **93/** __ White (RAL 9016)

Finish customization
(Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1_ 2700 K - 2207 lm
/3_ 3500 K - 2304 lm
F

Tunable White
/8_ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F
CRI >90

Control

4878 __ / __

__ / __ **A** Static White +
Push; 1-10V; DALI-2

__ / __ **Z** Static White +
Casambi

__ / __ **81** Tunable White +
DALI-2 DT8

__ / __ **8Z** Tunable White +
Casambi

Materials


Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics


1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

Notes4878 __ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

4880



Finishes

- **18/** __ Graphite (Adapta RF9913WX)
- **58/** __ Cream (RAL 7044)
- **93/** __ White (RAL 9016)

Finish customization
(Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1_ 2700 K - 2207 lm
/3_ 3500 K - 2304 lm
F

Tunable White
/8_ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F
CRI >90

Control

4880 __ / __

__ / __ **A** Static White +
Push; 1-10V; DALI-2

__ / __ **Z** Static White +
Casambi

__ / __ **81** Tunable White +
DALI-2 DT8

__ / __ **8Z** Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

Notes4880 __ / 81: Tunable White + DALI-2 DT8 **Multi-volt**



Duo Petra

Design by Ramos & Bassols

Duo Petra's slate veneer lends a timeless elegance to the collection. The ceiling lamp's gently curved form encases a velvety slate-finished interior for a sophisticated, natural aesthetic.

Ceiling

4871

Ø 47,5 cm



4873

Ø 78,5 cm



4875

Ø 35 cm



4877

Ø 35 cm



4879

Ø 70 cm




4881

Ø 70 cm



4877



Finishes
 ● **18/** __ Graphite (Adapta RF9913WX)
 ● **58/** __ Cream (RAL 7044)
 ● **93/** __ White (RAL 9016)
Finish customization
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
Static White
 /1 _ 2700 K - 644 lm
 /3 _ 3500 K - 632 lm
 [G] →
Tunable White
 /8 _ (2200 K - 4000 K)
 1244 lm - 1582 lm
 [G] → - [F] →
 CRI >90

Control
4877 __ / __
 __ / _1 Static White + DALI-2
 __ / _B Static White + Push; 1-10V
 __ / _Z Static White + Casambi
 __ / _81 Tunable White + DALI-2 DT8
 __ / _8Z Tunable White + Casambi

Materials
 Diffuser: PC- Polycarbonate.
 Main Body: Aluminum.
 Inner structure: Slate.


Packaging
 1 Box 0,44 x 0,44 x 0,35 m
 Vol 0,0678 m³
 Gross weight 5 Kg Net weight 4 Kg

Light Source and electronics
 1 x LED PLATE 12 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Notes
 4877 __ / _1: Static White + DALI-2 [Bi-volt]
 4877 __ / _B: Static White + Push; 1-10V [Bi-volt]
 4877 __ / _81: Tunable White + DALI-2 DT8 [Multi-volt]



4879



Finishes
 ● **18/** __ Graphite (Adapta RF9913WX)
 ● **58/** __ Cream (RAL 7044)
 ● **93/** __ White (RAL 9016)
Finish customization
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
Static White
 /1 _ 2700 K - 2207 lm
 /3 _ 3500 K - 2304 lm
 [F] →
Tunable White
 /8 _ (2200 K - 4000 K)
 1901 lm - 2461 lm
 [G] → - [F] →
 CRI >90

Control
4879 __ / __
 __ / _A Static White + Push; 1-10V; DALI-2
 __ / _Z Static White + Casambi
 __ / _81 Tunable White + DALI-2 DT8
 __ / _8Z Tunable White + Casambi

Materials
 Diffuser: PC- Polycarbonate.
 Main Body: Aluminum.
 Inner structure: Slate.


Packaging
 1 Box 0,79 x 0,79 x 0,59 m
 Vol 0,3682 m³
 Gross weight 16 Kg Net weight 14 Kg

Light Source and electronics
 1 x LED PLATE 26,5 W 500 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Notes
 4879 __ / _81: Tunable White + DALI-2 DT8 [Multi-volt]



4881



Finishes
 ● **18/** __ Graphite (Adapta RF9913WX)
 ● **58/** __ Cream (RAL 7044)
 ● **93/** __ White (RAL 9016)
Finish customization
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
Static White
 /1 _ 2700 K - 2207 lm
 /3 _ 3500 K - 2304 lm
 [F] →
Tunable White
 /8 _ (2200 K - 4000 K)
 1901 lm - 2461 lm
 [G] → - [F] →
 CRI >90


Control
4881 __ / __
 __ / _A Static White + Push; 1-10V; DALI-2
 __ / _Z Static White + Casambi
 __ / _81 Tunable White + DALI-2 DT8
 __ / _8Z Tunable White + Casambi

Materials
 Diffuser: PC- Polycarbonate.
 Main Body: Aluminum.
 Inner structure: Slate.

Packaging
 1 Box 0,79 x 0,79 x 0,59 m
 Vol 0,3682 m³
 Gross weight 16 Kg Net weight 14 Kg

Light Source and electronics
 1 x LED PLATE 26,5 W 500 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Notes
 4881 __ / _81: Tunable White + DALI-2 DT8 [Multi-volt]





Warm

Design by Ramos & Bassols

A contemporary take on a timeless design, Warm features a generous drum shade in a muted colour palette for a refined touch.

Table



4895 4896


Ø 19 x 41 cm



4900 4901

Ø 32,4 x 59 cm

4895



Finishes

- **10 White** (NCS S 0300-N)

LED 2700 K 470 lm

4895 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics
3 x LED G9 230V 4,2 W

Packaging


2 Boxes
Total Vol 0,0390 m³
Gross weight 2,9 Kg Net weight 1,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m



4896



Finishes

- **10 White** (NCS S 0300-N)
- **25 Beige D1** (NCS S 4005-Y50R)
- **28 Brown M1** (NCS S 4020-Y60R)
- **56 Green D1** (NCS S 7010-G30Y)

LED 2700 K 470 lm

4896 __ / 00

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Shade: Aluminium.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics
3 x LED G9 230V 4,2 W

Packaging

2 Boxes
Total Vol 0,0390 m³
Gross weight 2,9 Kg Net weight 2 Kg


Notes

On/ Off switch on the cable.
Electric cable 2 m





4900



Finishes
● **10 White**
 (NCS S 0300-N)

LED 2700 K 1520 lm

4900 10 / 00

Materials

Shade: Screen.
 Diffuser: PMMA.
 Rod: Aluminum.
 Base: Steel.

Light Source and electronics
 3 x LED E27 230V 12 W

Packaging


2 Boxes
 Total Vol 0,2153 m³
 Gross weight 4,3 Kg Net weight 3,8 Kg

Notes

On/ Off switch on the cable.
 Electric cable 2 m



4901



Finishes
● **10 White**
 (NCS S 0300-N)
● **25 Beige D1**
 (NCS S 4005-Y50R)
● **28 Brown M1**
 (NCS S 4020-Y60R)
● **56 Green D1**
 (NCS S 7010-G30Y)

LED 2700 K 1520 lm

4901 __ / 00

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

Materials

Shade: Aluminum.
 Diffuser: PMMA.
 Rod: Aluminum.
 Base: Steel.

Light Source and electronics
 3 x LED E27 230V 12 W

Packaging

2 Boxes
 Total Vol 0,2153 m³
 Gross weight 4,8 Kg Net weight 4,3 Kg

Notes

On/ Off switch on the cable.
 Electric cable 2 m




Floor



4905 4906
Ø 32,4 x 150 cm

4905



Finishes

- **10 White**
(NCS S 0300-N)

LED 2700 K 1520 lm

4905 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics
3 x LED E27 230V 12 W

Packaging


2 Boxes
Total Vol 0,3426 m³
Gross weight 10,2 Kg Net weight 6,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2,5 m



4906



Finishes

- **10 White**
(NCS S 0300-N)
- **25 Beige D1**
(NCS S 4005-Y50R)
- **28 Brown M1**
(NCS S 4020-Y60R)
- **56 Green D1**
(NCS S 7010-G30Y)

LED 2700 K 1520 lm

4906 __ / 00

Finish customization

(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics
3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,3426 m³
Gross weight 10,7 Kg Net weight 6,8 Kg

Notes

On/ Off switch on the cable.
Electric cable 2,5 m




Pendant



4925 4926

Ø 62 cm

4925



Finishes
10 White
 (NCS S 0300-N)

LED 2700 K 1520 lm

4925 10 / 00

Materials
 Shade: Screen.
 Canopy: Steel.
 Diffuser: PMMA.


Light Source and electronics
 4 x LED E27 230V 12 W

Packaging
 1 Box 0,68 x 0,68 x 0,39 m
 Vol 0,18 m³
 Gross weight 7,7 Kg Net weight 3,9 Kg

Notes
 Extra cable length.



4926



Finishes
10 White
 (NCS S 0300-N)
25 Beige D1
 (NCS S 4005-Y50R)
28 Brown M1
 (NCS S 4020-Y60R)
56 Green D1
 (NCS S 7010-G30Y)

LED 2700 K 1520 lm

4926 _ _ / 00

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

Materials
 Shade: Aluminum.
 Canopy: Steel.
 Diffuser: PMMA.

Light Source and electronics
 4 x LED E27 230V 12 W

Packaging
 1 Box 0,77 x 0,77 x 0,50 m
 Vol 0,2965 m³
 Gross weight 8,9 Kg Net weight 5,1 Kg

Notes
 Extra cable length.



Ghost

Design by Arik Levy

A study in contrasts, the Ghost collection embodies both spirit and materiality, discretion and presence. A contemporary reimagining of the grand lights that once graced entryways and living areas, its sensuous form radiates with a warm, welcoming glow.

Table



4960

Ø 47,5 x 112 cm



4965

Ø 47,5 x 92 cm




4970

Ø 47,5 x 88 cm

Dimming and installation options




/15: Push-dimming model equipped with two buttons, one for each diffuser. A quick push turns the light on and off, a longer presson dims the light.

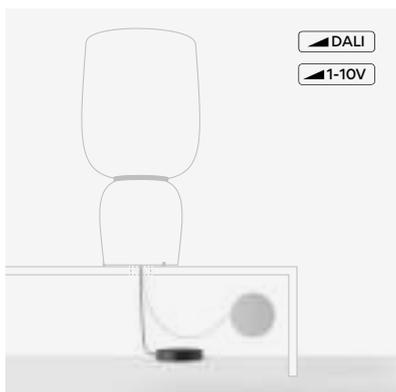

Dimming and installation options: The driver of the DALI-2, 1-10V and Casambi versions is enclosed in a box at the end of the cable.

4960

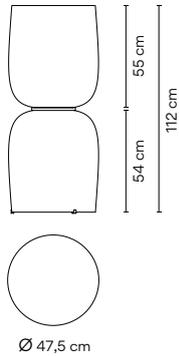

Finishes
● 11/ __ Black
(NCS S 8500-N)

LED Colour Temperature
/1_ 2700 K - 5432,0 lm
D →
CRI >90

Control

4960 __ / __
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 5 Push
(with or without memory)
__ / _ Z Casambi

Materials

Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6051 m³
Gross weight 25,7 Kg Net weight 22,7 Kg


Notes

4960 __ / _ 1: DALI-2 **Bi-volt**
4960 __ / _ 3: 1-10V **Multi-volt**
4960 __ / _ 5: Pulsador **Bi-volt**

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

LED IP20 CE UK ENEC Dimmer

4965



Finishes
● 11/ __ Black
(NCS S 8500-N)

LED Colour Temperature
/1_ 2700 K - 5432,0 lm
D →
CRI >90

Control

4965 __ / __
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 5 Push
(with or without memory)
__ / _ Z Casambi

Materials

Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6051 m³
Gross weight 20,6 Kg Net weight 17,6 Kg


Notes

4965 __ / _ 1: DALI-2 **Multi-volt**
4965 __ / _ 3: 1-10V **Multi-volt**
4965 __ / _ 5: Pulsador **Bi-volt**

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

LED IP20 CE UK ENEC Dimmer

4970



Finishes
● 11/ __ Black
(NCS S 8500-N)

LED Colour Temperature
/1_ 2700 K - 5432,0 lm
D →
CRI >90

Control

4970 __ / __
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 5 Push
(with or without memory)
__ / _ Z Casambi

Materials

Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6051 m³
Gross weight 21,7 Kg Net weight 18,7 Kg

Notes

4970 __ / _ 1: DALI-2 **Multi-volt**
4970 __ / _ 3: 1-10V **Multi-volt**
4970 __ / _ 5: Pulsador **Bi-volt**

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

LED IP20 CE UK ENEC Dimmer


Pendant



4987

Ø 47,5 cm

4987



Finishes
 ● **11/ _ _ Black**
 (NCS S 8500-N)

LED Colour Temperature
 /1_ 2700 K - 4826,7 lm
 D
 CRI >90

Control
4987 _ _ / _ _
 _ _ / _ A Push; -10V;
 DALI-2
 _ _ / _ Z Casambi

Materials
 Diffuser: Opal Glass.
 Metal parts: Aluminum.

Light Source and electronics
 1 x LED 37,2 W 1050 mA
 Constant Current 1050 mA
 100~240V 50/60Hz

Packaging
 1 Box 0,61 x 0,62 x 0,80 m
 Vol 0,3026 m³
 Gross weight 13,9 Kg Net weight 12,4 Kg
 Extra cable length.

LED IP20 CE ENEC ENEC
 Dimmer



Balance

Design by Jordi Vilardell

Balance features a classic drum shade, elegantly cantilevered from its column to provide a general ambient lighting effect or a more focused reading light.

Floor



5189 5190

260 x 210 cm




5191 5192

215 x 210 cm



5189



- Finishes
- 18 Graphite (RAL 7016)
 - 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control

5189 __ / 05 Push

Materials

Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Aluminum.

Light Source and electronics
3 x E27 230V 12 W

Packaging


3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,5 Kg

Notes

Dimmer on the cable. 3 m



5190



- Finishes
- 18 Graphite (RAL 7016)
 - 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control

5190 __ / 05 Push

Materials

Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Parchment paper.

Light Source and electronics
3 x E27 230V 12 W

Packaging


3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,5 Kg

Notes

Dimmer on the cable. 3 m



5191



- Finishes
- 18 Graphite (RAL 7016)
 - 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control

5191 __ / 05 Push

Materials

Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Parchment paper.

Light Source and electronics
3 x E27 230V 12 W

Packaging


3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,1 Kg

Notes

Dimmer on the cable. 3 m



5192



- Finishes
- 18 Graphite (RAL 7016)
 - 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control

5192 __ / 05 Push

Materials

Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Aluminum.

Light Source and electronics
3 x E27 230V 12 W

Packaging

3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,1 Kg

Notes

Dimmer on the cable. 3 m



Puck

Design by Jordi Vilardell

Inspired by the classic circle silhouette, Puck panel light's simple, spherical forms can be superimposed on one another, lending sensibility overhead. Crafted of premium, opal triplex blown glass, it casts a warm glow.

Ceiling Wall



5410
24,4 x 6,6 cm



5412
27,2 x 7,7 cm



5425 5427
31,8 x 24,2 cm




5430 5432
46,7 x 38 cm



5435 5437
56,8 x 49,2cm

5410



Finishes
● **03 White**
(RAL 9016)

LED Colour Temperature
2700 K 470 lm

5410 03 / 00 On/ Off

Materials

Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
1 x LED G9 4,2 W

Packaging

1 Box 0,37 x 0,37 x 0,23 m
Vol 0,0315 m³
Gross weight 0,95 Kg Net weight 0,7 Kg



5412



Finishes
● **03/ _ _ White**
(RAL 9016)

LED Colour Temperature
/1_ 2700 K - 880 lm

CRI >90

Control
5412 03 / 10 On/ Off

Materials

Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
1 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,37 x 0,37 x 0,23 m
Vol 0,0315 m³
Gross weight 0,95 Kg Net weight 0,7 Kg



5425



Finishes
● **03 White**
(RAL 9016)

LED Colour Temperature
2700 K - 470 lm

5425 03 / 00 On/ Off

Materials

Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
2 x LED G9 4,2 W

Packaging


1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,26 Kg Net weight 1,08 Kg

Notes

All version require only one electrical connection



5427



Finishes
● **03/ _ _ White**
(RAL 9016)

LED Colour Temperature
/1_ 2700 K - 831 lm

/3_ 3500 K - 878 lm

CRI >90

Control
5427 03 / _ 0 On/ Off

Materials

Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
2 x LED PLATE 3,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,26 Kg Net weight 1,08 Kg

Notes

All version require only one electrical connection



5430


Finishes

- 03 White (RAL 9016)

LED Colour Temperature

2700 K 470 lm

5430 03 / 00 On/ Off



Materials

Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics

2 x LED G9 4,2 W

Packaging

1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes

All version require only one electrical connection



5432

Finishes

- 03/ __ White (RAL 9016)

LED Colour Temperature


/1_ 2700 K - 1760 lm



CRI >90

Control

5432 03 / 10 On/ Off



Materials

Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics

2 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes

All version require only one electrical connection



5435


Finishes

- 03 White (RAL 9016)

LED Colour Temperature

2700 K 470 lm

5435 03 / 00 On/ Off



Materials

Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics

3 x LED G9 4,2 W

Packaging

2 Boxes
Total Vol 0,0780 m³
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes

All version require only one electrical connection



5437

Finishes

- 03/ __ White (RAL 9016)

LED Colour Temperature


/1_ 2700 K - 2640 lm



CRI >90

Control

5437 03 / 10 On/ Off



Materials

Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics

3 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0780 m³
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes

All version require only one electrical connection





Puck Wall Art

Design by Jordi Vilardell

Puck Wall Art combines two circular wall lights of different sizes and colours, superimposed on top of one another, and combining to create a set of highly dynamic, sculptural compositions. The collection provides ambient indirect light and only requires a single electrical connection.

Wall



5470

Ø 30 cm



5471

Ø 40 cm



5472

Ø 45 cm



5474

Ø 46 cm



5476

Ø 60 cm



5480

58 x 58 x 6 cm



5481

69 x 69 x 9 cm



5485

68 x 68 x 9 cm



5487

87 x 87 x 9 cm



5486


87 x 87 x 11 cm



5491

103 x 84 x 11 cm

Each project is unique.
Personalise your own
Puck Wall Art composition
quick and easy.

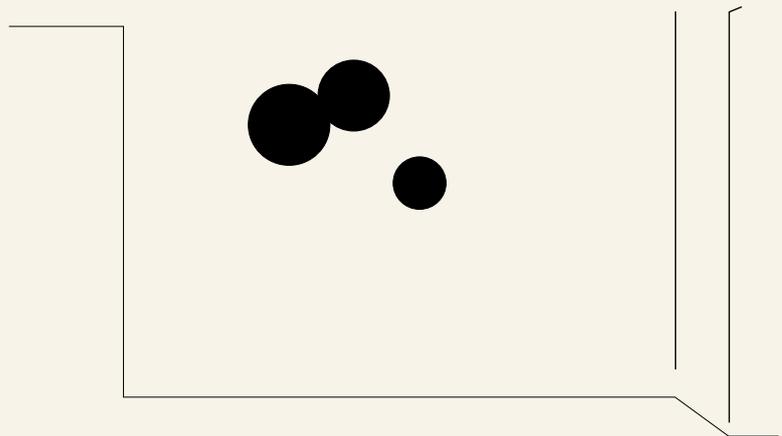

5470

- Finishes**
- **15/** __ Grey L2
(NCS S 2500-N)
 - **21/** __ Black Grey
(NCS S 7000-N)
 - **28/** __ Brown M1
(NCS S 4020-Y60R)

LED Colour Temperature

/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm


E >

CRI >90

Control

5470 __ / __

__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 4 Triac
__ / _ 5 Push
__ / _ Z Casambi



- Finishes**
- **76/** __ Grey Felt L1
 - **77/** __ Grey Felt D1

LED Colour Temperature

/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm

E >

CRI >90

Control

5470 __ / __

__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 4 Triac
__ / _ 5 Push
__ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
Constant Current 700 mA

/ _ 1 110-240V 50/60Hz Bi-volt
/ _ 3 110-240V 50/60Hz Bi-volt
/ _ 5 110-240V 50/60Hz Bi-volt
/ _ 4 220-240V 50/60Hz
/ _ Z 220-240V 50/60Hz

Packaging

1 Box 0,34 x 0,34 x 0,23 m
Vol 0,0266 m³
Gross weight 2,6 Kg Net weight 1,6 Kg


Notes

5470 __ / _ 1: DALI-2 **Bi-volt**
5470 __ / _ 3: 1-10V **Bi-volt**

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE UK ENEC Dimmer


5471	Finishes <ul style="list-style-type: none"> ● 15/ __ __ Grey L2 (NCS S 2500-N) ● 21/ __ __ Black Grey (NCS S 7000-N) ● 28/ __ __ Brown M1 (NCS S 4020-Y60R) 	LED Colour Temperature /1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E → CRI >90	Control 5471 __ / __ <hr/> __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi
-------------	---	---	---



Finishes <ul style="list-style-type: none"> ● 76/ __ __ Grey Felt L1 ● 77/ __ __ Grey Felt D1 	LED Colour Temperature /1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E → CRI >90	Control 5471 __ / __ <hr/> __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi
---	---	---

Materials Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum. Light Source and electronics 1 x LED STRIP 12,6 W 700 mA Constant Current 700 mA / _ 1 110~240V 50/60Hz Bi-volt / _ 3 110~240V 50/60Hz Bi-volt / _ 5 110~240V 50/60Hz Bi-volt / _ 4 220~240V 50/60Hz / _ Z 220~240V 50/60Hz	Packaging 1 Box 0,44 x 0,44 x 0,25 m Vol 0,0484 m ³ Gross weight 3,5 Kg Net weight 1,9 Kg Notes 5471 __ / _ 3: 1-10V Bi-volt 5471 __ / _ 5: Push Bi-volt A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system LED IP20 CE UK ERC
---	--

5472	Finishes <ul style="list-style-type: none"> ● 15/ __ __ Grey L2 (NCS S 2500-N) ● 21/ __ __ Black Grey (NCS S 7000-N) ● 28/ __ __ Brown M1 (NCS S 4020-Y60R) 	LED Colour Temperature /1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E → CRI >90	Control 5472 __ / __ <hr/> __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi
-------------	---	---	---




Finishes <ul style="list-style-type: none"> ● 76/ __ __ Grey Felt L1 ● 77/ __ __ Grey Felt D1 	LED Colour Temperature /1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E → CRI >90	Control 5472 __ / __ <hr/> __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi
---	---	---

Materials Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum. Light Source and electronics 1 x LED STRIP 12,6 W 700 mA Constant Current 700 mA / _ 1 110~240V 50/60Hz Bi-volt / _ 3 110~240V 50/60Hz Bi-volt / _ 5 110~240V 50/60Hz Bi-volt / _ 4 220~240V 50/60Hz / _ Z 220~240V 50/60Hz	Packaging 1 Box 0,51 x 0,51 x 0,26 m Vol 0,0676 m ³ Gross weight 4,75 Kg Net weight 2,25 Kg Notes 5472 __ / _ 3: 1-10V Bi-volt 5472 __ / _ 5: Push Bi-volt A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system LED IP20 CE UK ERC
---	--

5474

<p>Finishes</p> <ul style="list-style-type: none"> ● 15/ __ Grey L2 (NCS S 2500-N) ● 21/ __ Black Grey (NCS S 7000-N) ● 28/ __ Brown M1 (NCS S 4020-Y60R) 	<p>LED Colour Temperature</p> <p>/1_ 2700 K - 952 lm /3_ 3500 K - 1017 lm</p> <p>☐ E ☐</p> <p>CRI >90</p>	<p>Control</p> <p>5474 __ / __</p> <hr/> <p>__ / _1 DALI-2 __ / _3 1-10V __ / _4 Triac __ / _5 Push __ / _Z Casambi</p>
---	--	--



<p>Finishes</p> <ul style="list-style-type: none"> ● 71/ __ Grey Felt L1 & Grey Felt D1 ● 76/ __ Grey Felt L1 	<p>LED Colour Temperature</p> <p>/1_ 2700 K - 952 lm /3_ 3500 K - 1017 lm</p> <p>☐ E ☐</p> <p>CRI >90</p>	<p>Control</p> <p>5474 __ / __</p> <hr/> <p>__ / _1 DALI-2 __ / _3 1-10V __ / _4 Triac __ / _5 Push __ / _Z Casambi</p>
--	--	--

Materials

Diffuser: PC- Polycarbonate.
 Shade: ABS.
 Wall support: Aluminum.
 Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
 Constant Current 700 mA
 / _1 110-240V 50/60Hz Bi-volt
 / _3 110-240V 50/60Hz Bi-volt
 / _5 110-240V 50/60Hz Bi-volt
 / _4 220-240V 50/60Hz
 / _Z 220-240V 50/60Hz

Packaging

1 Box 0,51 x 0,51 x 0,26 m
 Vol 0,0676 m³
 Gross weight 4,75 Kg Net weight 2,25 Kg

Notes


5474 __ / _1: DALI-2 Bi-volt
 5474 __ / _3: 1-10V Bi-volt
 5474 __ / _5: Push Bi-volt

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system



5476

<p>Finishes</p> <ul style="list-style-type: none"> ● 15/ __ Grey L2 (NCS S 2500-N) ● 21/ __ Black Grey (NCS S 7000-N) ● 28/ __ Brown M1 (NCS S 4020-Y60R) 	<p>LED Colour Temperature</p> <p>/1_ 2700 K - 1435 lm /3_ 3500 K - 1533 lm</p> <p>☐ E ☐</p> <p>CRI >90</p>	<p>Control</p> <p>5476 __ / __</p> <hr/> <p>__ / _1 DALI-2 __ / _3 1-10V __ / _4 Triac __ / _5 Push __ / _Z Casambi</p>
---	---	--



<p>Finishes</p> <ul style="list-style-type: none"> ● 71/ __ Grey Felt L1 & Grey Felt D1 ● 76/ __ Grey Felt L1 	<p>LED Colour Temperature</p> <p>/1_ 2700 K - 1435 lm /3_ 3500 K - 1533 lm</p> <p>☐ E ☐</p> <p>CRI >90</p>	<p>Control</p> <p>5476 __ / __</p> <hr/> <p>__ / _1 DALI-2 __ / _3 1-10V __ / _4 Triac __ / _5 Push __ / _Z Casambi</p>
--	---	--

Materials

Diffuser: PC- Polycarbonate.
 Shade: ABS.
 Wall support: Aluminum.
 Ring: Steel.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _1 110-240V 50/60Hz Bi-volt
 / _3 110-240V 50/60Hz Bi-volt
 / _5 110-240V 50/60Hz Bi-volt
 / _4 220-240V 50/60Hz
 / _Z 220-240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,235 m
 Vol 0,1024 m³
 Gross weight 6,3 Kg Net weight 2,9 Kg

Notes

5476 __ / _3: 1-10V Bi-volt
 5476 __ / _5: Push Bi-volt

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system.



5480

- Finishes**
- **15/** __ Grey L2 (NCS S 2500-N)
 - **28/** __ Brown M1 (NCS S 4020-Y60R)
 - **72/** __ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)

LED Colour Temperature

/1 2700 K - 2388 lm
/3 3500 K - 2551 lm


E →

CRI >90

Control

5480 __ / __

__ / **1** DALI-2
 __ / **3** 1-10V
 __ / **4** Triac
 __ / **5** Push
 __ / **Z** Casambi



- Finishes**
- **71/** __ Grey Felt L1 & Grey Felt D1
 - **76/** __ Grey Felt L1

LED Colour Temperature

/1 2700 K - 2388 lm
/3 3500 K - 2551 lm

E →

CRI >90

Control

5480 __ / __

__ / **1** DALI-2
 __ / **3** 1-10V
 __ / **4** Triac
 __ / **5** Push
 __ / **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
 Shade: ABS.
 Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
 1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA

/ 1 110-240V 50/60Hz Bi-volt
/ 3 110-240V 50/60Hz Bi-volt
/ 5 110-240V 50/60Hz Bi-volt
/ 4 220-240V 50/60Hz
/ Z 220-240V 50/60Hz


Packaging

1 Box 0,46 x 0,46 x 0,4 m
 Vol 0,0846 m³
 Gross weight 6,1 Kg Net weight 3,4 Kg

Notes

5480 __ / __ 1: DALI-2 **Bi-volt**

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system.



5481

- Finishes**
- **15/** __ Grey L2 (NCS S 2500-N)
 - **28/** __ Brown M1 (NCS S 4020-Y60R)
 - **72/** __ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)

LED Colour Temperature

/1 2700 K - 2871 lm
/3 3500 K - 3067 lm


E →

CRI >90

Control

5481 __ / __

__ / **1** DALI-2
 __ / **3** 1-10V
 __ / **4** Triac
 __ / **5** Push
 __ / **Z** Casambi



- Finishes**
- **71/** __ Grey Felt L1 & Grey Felt D1
 - **76/** __ Grey Felt L1

LED Colour Temperature

/1 2700 K - 2871 lm
/3 3500 K - 3067 lm

E →

CRI >90

Control

5481 __ / __

__ / **1** DALI-2
 __ / **3** 1-10V
 __ / **4** Triac
 __ / **5** Push
 __ / **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
 Shade: ABS.
 Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
 1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA


/ 1 110-240V 50/60Hz Bi-volt
/ 3 110-240V 50/60Hz Bi-volt
/ 5 110-240V 50/60Hz Bi-volt
/ 4 220-240V 50/60Hz
/ Z 220-240V 50/60Hz

Packaging


1 Box 0,46 x 0,46 x 0,4 m
 Vol 0,0846 m³
 Gross weight 6,1 Kg Net weight 3,4 Kg

Notes

5481 __ / __ 1: DALI-2 **Bi-volt**



5485



- Finishes**
- **72/** _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)
 - **73/** _ _ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature

/1_ 2700 K - 2388 lm
 /3_ 3500 K - 2551 lm

E >

CRI >90

Control

5485 _ _ / _ _

_ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ 4 Triac
 _ _ / _ 5 Push
 _ _ / _ Z Casambi

- Finishes**
- **71/** _ _ Grey Felt L1 & Grey Felt D1

LED Colour Temperature

/1_ 2700 K - 2388 lm
 /3_ 3500 K - 2551 lm

E >

CRI >90

Control

5485 _ _ / _ _

_ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ 4 Triac
 _ _ / _ 5 Push
 _ _ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
 Shade: ABS.
 Wall support: Aluminum.
 Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
 1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA

/ _ 1 110-240V 50/60Hz Bi-volt
 / _ 3 110-240V 50/60Hz Bi-volt
 / _ 5 110-240V 50/60Hz Bi-volt
 / _ 4 220-240V 50/60Hz
 / _ Z 220-240V 50/60Hz

Packaging


1 Box 0,51 x 0,51 x 0,43 m
 Vol 0,1118 m³
 Gross weight 8,42 Kg Net weight 4,22 Kg

Notes

5481 _ _ / _ 1: DALI-2 **Bi-volt**

LED **IP20** **CE** **UK** **ERC**

5486



- Finishes**
- **72/** _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)
 - **73/** _ _ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature

/1_ 2700 K - 2871 lm
 /3_ 3500 K - 3067 lm

E >

CRI >90

Control

5486 _ _ / _ _

_ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ 4 Triac
 _ _ / _ 5 Push
 _ _ / _ Z Casambi

- Finishes**
- **71/** _ _ Grey Felt L1 & Grey Felt D1

LED Colour Temperature

/1_ 2700 K - 2871 lm
 /3_ 3500 K - 3067 lm

E >

CRI >90

Control

5486 _ _ / _ _

_ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ 4 Triac
 _ _ / _ 5 Push
 _ _ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
 Shade: ABS.
 Wall support: Aluminum.
 Ring: Steel.

Light Source and electronics

2 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA

/ _ 1 110-240V 50/60Hz Bi-volt
 / _ 3 110-240V 50/60Hz Bi-volt
 / _ 5 110-240V 50/60Hz Bi-volt
 / _ 4 220-240V 50/60Hz
 / _ Z 220-240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
 Vol 0,2178 m³
 Gross weight 11,35 Kg Net weight 5,45 Kg


Notes

5486 _ _ / _ 1: DALI-2 **Bi-volt**

LED **IP20** **CE** **UK** **ERC**

5487

<p>Finishes</p> <ul style="list-style-type: none"> ● 21/ __ Black Grey (NCS S 7000-N) ● 73/ __ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N) 	<p>LED Colour Temperature</p> <p>/1 _ 2700 K - 2388 lm /3 _ 3500 K - 2551 lm</p> <p>E →</p> <p>CRI >90</p>	<p>Control</p> <p>5487 __ / __</p> <p>__ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi</p>
---	--	---



<p>Finishes</p> <ul style="list-style-type: none"> ● 71/ __ Grey Felt L1 & Grey Felt D 	<p>LED Colour Temperature</p> <p>/1 _ 2700 K - 2388 lm /3 _ 3500 K - 2551 lm</p> <p>E →</p> <p>CRI >90</p>	<p>Control</p> <p>5487 __ / __</p> <p>__ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi</p>
---	--	---

Materials

Diffuser: PC- Polycarbonate.
 Shade: ABS.
 Wall support: Aluminum.
 Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
 1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _ **1** 110-240V 50/60Hz Bi-volt
 / _ **3** 110-240V 50/60Hz Bi-volt
 / _ **5** 110-240V 50/60Hz Bi-volt
 / _ **4** 220-240V 50/60Hz
 / _ **Z** 220-240V 50/60Hz


Packaging

1 Box 0,66 x 0,66 x 0,5 m
 Vol 0,2178 m³
 Gross weight 11,52 Kg Net weight 5,62 Kg



5491

<p>Finishes</p> <ul style="list-style-type: none"> ● 72/ __ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N) ● 73/ __ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N) 	<p>LED Colour Temperature</p> <p>/1 _ 2700 K - 4307 lm /3 _ 3500 K - 4601 lm</p> <p>E →</p> <p>CRI >90</p>	<p>Control</p> <p>5491 __ / __</p> <p>__ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi</p>
---	--	---



<p>Finishes</p> <ul style="list-style-type: none"> ● 71/ __ Grey Felt L1 & Grey Felt D1 	<p>LED Colour Temperature</p> <p>/1 _ 2700 K - 4307 lm /3 _ 3500 K - 4601 lm</p> <p>E →</p> <p>CRI >90</p>	<p>Control</p> <p>5491 __ / __</p> <p>__ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi</p>
--	--	---

Materials


Diffuser: PC- Polycarbonate.
 Shade: ABS.
 Wall support: Aluminum.
 Ring: Steel.

Light Source and electronics

3 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _ **1** 110-240V 50/60Hz Bi-volt
 / _ **3** 110-240V 50/60Hz Bi-volt
 / _ **5** 110-240V 50/60Hz Bi-volt
 / _ **4** 220-240V 50/60Hz
 / _ **Z** 220-240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,67 m
 Vol 0,2919 m³
 Gross weight 14,85 Kg Net weight 7,35 Kg





Mayfair Mini

Design by Diego Fortunato

The perfect lighting companion, Mayfair Mini is a small-scale design that casts a contained pool of diffuse, downlight for an intimate atmosphere. A light to grab and go that can be moved where needed -indoors or out- via its slender stem.

Table



5495

Ø 20 x 38 cm

Portable



5496

Ø 20 x 38 cm

Bolt-down



5497

Ø 20 x 38 cm

Bolt-down

5495

Finishes


- **23 Warm White**
(NCS S 0502-Y50R)
- **25 Beige D1**
(NCS S 4005-Y50R)
- **38 Terra Dark**
(NCS S 5040-Y70R)
- **47 Green L1**
(NCS S 6005-G80Y)

LED Colour Temperature

/1_ 2700 K - 223 lm
E
CRI >90

Control

5495 __ / 16 Touch sensor



Materials

Base and shade: ABS + PC- Polycarbonate.
Diffuser: PC- Polycarbonate.
Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
Constant Voltage 5V
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
Vol 0,033 m³
Gross weight 1,62 Kg Net weight 0,73 Kg


Notes

Rechargeable battery autonomy:
6h at 100% Intensity.
12h at 50% Intensity.
18h at 25% Intensity.

USB-C cable: length 1,20 m
(from the base to the USB charger).

LED IP20 CE UK ENE Bi-volt

5496



- Finishes**
- 23 Warm White (NCS S 0502-Y50R)
 - 25 Beige D1 (NCS S 4005-Y50R)
 - 38 Terra Dark (NCS S 5040-Y70R)
 - 47 Green L1 (NCS S 6005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 223 lm
 E
 CRI >90

Control
 5496 __ / 16 Touch sensor
 (with or without memory)

Materials

Base and shade: ABS + PC- Polycarbonate
 Diffuser: PC- Polycarbonate.
 Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
 Constant Voltage 5V
 100-240V 50/60Hz

Packaging


1 Box 0,25 x 0,26 x 0,50 m
 Vol 0,033 m³
 Gross weight 1,84 Kg Net weight 0,94 Kg

Notes

Cable length: 1 m
 (from the base to the USB charger)



5497



- Finishes**
- 23 Warm White (NCS S 0502-Y50R)
 - 25 Beige D1 (NCS S 4005-Y50R)
 - 38 Terra Dark (NCS S 5040-Y70R)
 - 47 Green L1 (NCS S 6005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 223 lm
 E
 CRI >90

Control
 5497 __ / __
 __ / 10 On/ Off
 __ / 11 DALI-2
 __ / 13 1-10V

Materials

Base and shade: ABS + PC- Polycarbonate
 Diffuser: PC- Polycarbonate.
 Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
 Constant Voltage 5V
 100-240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
 Vol 0,033 m³
 Gross weight 1,45 Kg Net weight 0,54 Kg

Notes

Cable length: 1 m. (the cable connects directly to the remote driver)



Mayfair

Design by Diego Fortunato

A modern reimagining of the traditional 19th-century bouillotte lamp, the Mayfair collection is a statement in contemporary design. Perfectly proportioned, its luminaire casts a pool of diffuse, downward light to create an intimate lighting effect.

Table Floor



5500

Ø 30 x 52 cm



5505

Ø 30 x 52 cm



5510


Ø 30 x 147 cm



5515

Ø 30 x 147 cm

5500



- Finishes
- 07/ __ Graphite and green (RAL 7016, RAL 6026)
 - 08/ __ Graphite and orange (RAL 7016, RAL 2009)

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube: Steel. Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

LED Colour Temperature

/1_ 2700 K - 2027 lm

CRI >90

Control

5500 __ / __

- __ / 16 Optical sensor
- __ / 18 Push 2 (without memory)

Packaging


1 Box 0,22 x 0,35 x 0,61 m
Vol 0,0470 m³
Gross weight 3,6 Kg Net weight 3,4 Kg

Notes

Touch dimmer on base. Electric cable 2 m.

LED IP20 CE UK ENEC Dimmer Multi-volt

5505



Finishes

- 18/ __ Graphite (RAL 7016)
- 23/ __ Warm White (NCS S 0502-Y50R)
- 25/ __ Beige D1 (NCS S 4005-Y50R)
- 38/ __ Terra Dark (NCS S 5040-Y70R)
- 47/ __ Green L1 (NCS S 4005-G80Y)

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

LED Colour Temperature

/1_ 2700 K - 2027 lm

 CRI >90

Control

5505 __ / __
 __ / 16 Optical sensor
 __ / 18 Push 2 (without memory)

Finishes

- 20/ __ Gold
- 67/ __ Copper

LED Colour Temperature

/1_ 2700 K - 2027 lm

 CRI >90

Control

5505 __ / __
 __ / 16 Optical sensor
 __ / 18 Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
 Shade: PMMA.
 Tube: Steel. Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
 1 x LED STRIP 24V 12,6 W
 Constant Voltage 24V
 100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,35 x 0,61 m
 Vol 0,0470 m³
 Gross weight 3,6 Kg Net weight 3,4 Kg


Notes

Touch dimmer on base. Electric cable 2 m.




5510

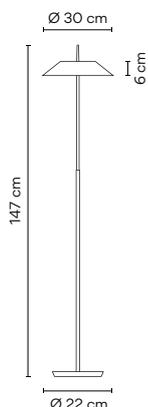

<p>Finishes</p> <ul style="list-style-type: none"> ● 07/ __ Graphite and green (RAL 7016, RAL 6026) ● 08/ __ Graphite and orange (RAL 7016, RAL 2009) 	<p>LED Colour Temperature</p> <p>/1 _ 2700 K - 2027 lm</p> <p>□ ▢</p> <p>CRI >90</p>	<p>Control</p> <p>5510 __ / __</p> <hr/> <p>__ / 16 Optical sensor</p> <p>__ / 18 Push 2 (without memory)</p>
<p>Materials</p> <p>Diffuser: PC- Polycarbonate. Shade: PMMA. Tube: Steel. Base: Zinc Alloy.</p> <p>Light Source and electronics</p> <p>1 x LED STRIP 24V 2,4 W 1 x LED STRIP 24V 12,6 W Constant Voltage 24V 100~240V 50/60Hz</p>	<p>Packaging</p> <p>1 Box 1,50 x 0,32 x 0,34 m Vol 0,1630 m³ Gross weight 12,8 Kg Net weight 6,2 Kg</p> <p>Notes</p> <p>Touch dimmer on shade. Electric cable 2 m.</p>	<p>LED □ IP20 CE UK ENE Dimmer Multi-volt</p>

5515

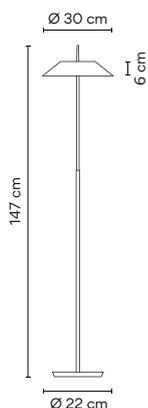

<p>Finishes</p> <ul style="list-style-type: none"> ● 18/ __ Graphite (RAL 7016) ● 23/ __ Warm White (NCS S 0502-Y50R) ● 25/ __ Beige D1 (NCS S 4005-Y50R) ● 38/ __ Terra Dark (NCS S 5040-Y70R) ● 47/ __ Green L1 (NCS S 4005-G80Y) <p>Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)</p>	<p>LED Colour Temperature</p> <p>/1 _ 2700 K - 2027 lm</p> <p>□ ▢</p> <p>CRI >90</p>	<p>Control</p> <p>5515 __ / __</p> <hr/> <p>__ / 16 Optical sensor</p> <p>__ / 18 Push 2 (without memory)</p>
<p>Finishes</p> <ul style="list-style-type: none"> ● 20/ __ Gold ● 67/ __ Copper 	<p>LED Colour Temperature</p> <p>/1 _ 2700 K - 2027 lm</p> <p>□ ▢</p> <p>CRI >90</p>	<p>Control</p> <p>5515 __ / __</p> <hr/> <p>__ / 16 Optical sensor</p> <p>__ / 18 Push 2 (without memory)</p>
<p>Materials</p> <p>Diffuser: PC- Polycarbonate. Shade: PMMA. Tube: Steel. Base: Zinc Alloy.</p> <p>Light Source and electronics</p> <p>1 x LED STRIP 24V 2,4 W 1 x LED STRIP 24V 12,6 W Constant Voltage 24V 100~240V 50/60Hz</p>	<p>Packaging</p> <p>1 Box 1,50 x 0,32 x 0,34 m Vol 0,1630 m³ Gross weight 12,8 Kg Net weight 6,2 Kg</p> <p>Notes</p> <p>Touch dimmer on shade. Electric cable 2 m.</p>	<p>LED □ IP20 CE UK ENE Dimmer Multi-volt</p>



Pendant

INDIVIDUAL MODEL




5520 **5525**
 Ø 30 cm Ø 30 cm

MULTIPLE MODELS



INDIVIDUAL MODEL

5520



Finishes
07/ __ Graphite and green (RAL 7016, RAL 6026)
08/ __ Graphite and orange (RAL 7016, RAL 2009)

LED Colour Temperature
 /1_ 2700 K - 2027 lm

 CRI >90

Control
5520 __ / __
 __ / **1** DALI-2
 __ / **B** Push; 1-10V
 __ / **Z** Casambi

Select Electrical connection



_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
 Diffuser: PC- Polycarbonate.
 Shade: PMMA.
 Tube and canopy: Steel.

Light Source and electronics
 1 x LED STRIP 24V 2,4 W
 1 x LED STRIP 24V 12,6 W
 Constant Voltage 24V
 220~240V 50/60Hz

Packaging
 1 Box 0,50 x 0,31 x 0,31 m
 Vol 0,0500 m³
 Gross weight 2,8 Kg Net weight 1,8 Kg

Notes
 Extra cable length.



5525


- Finishes**
- **18/** __ Graphite (RAL 7016)
 - **23/** __ Warm White (NCS S 0502-Y50R)
 - **25/** __ Beige D1 (NCS S 4005-Y50R)
 - **38/** __ Terra Dark (NCS S 5040-Y70R)
 - **47/** __ Green L1 (NCS S 4005-G80Y)
- Finish customization**
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 __ 2700 K - 2027 lm
D >

CRI >90

Control
5525 __ / __

__ / __ **1** DALI-2
__ / __ **B** Push; 1-10V
__ / __ **Z** Casambi



- Finishes**
- **20/** __ Gold
 - **67/** __ Copper

LED Colour Temperature
/1 __ 2700 K - 2027 lm
D >

CRI >90

5525 __ / __

__ / __ **1** DALI-2
__ / __ **B** Push; 1-10V
__ / __ **Z** Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials
Diffuser: PC- Polycarbonate.
Shade: PMMA.
Ttube and canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
220-240V 50/60Hz

Packaging
1 Box 0,50 x 0,31 x 0,31 m
Vol 0,0500 m³
Gross weight 2,9 Kg Net weight 1,9 Kg

Notes
Extra cable length.



MULTIPLE MODELS

Select your model at vibia.com and adjust



See more
multiple models
at vibia.com

Finishes

5520

07/ __ Graphite and green (RAL 7016, RAL 6026)

08/ __ Graphite and orange (RAL 7016, RAL 2009)

Finishes

5525

20/ __ Gold
67/ __ Copper

18/ __ Graphite (RAL 7016)
23/ __ Warm White (NCS S 0502-Y50R)
25/ __ Beige D1 (NCS S 4005-Y50R)
38/ __ Terra Dark (NCS S 5040-Y70R)
47/ __ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1_ 2700 K

CRI >90

Control

Model __ / __

__ / _1 DALI-2

__ / _B Push; 1-10V

__ / _Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5520, 5525

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.


_23
Built-in XS




Ø 8 cm
height 6 cm

match with fixture finish.

Remote



Built-in



Regular ceiling

_10
Surface



Ø 16 cm

match with fixture finish.

_18
Free Wire



1 wire

Ø 20 cm



2 - 6 wires

Ø 36 cm



7 - 9 wires

Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

Materials

5520

Diffuser: PC- Polycarbonate. Shade: PMMA.
Tube and canopy: Steel.

5525

Diffuser: PC- Polycarbonate.
Shade, tube and canopy: Steel.

Notes

Additional cable length from 2 m.

LED



Africa

Design by Francisco Gomez Paz

An object of desire, Africa is a unique gift that combines richness of form and materiality with high performance lighting capabilities. A holistic exploration of beauty and functionality.

Table



5580

Ø 5 x 45 cm

Portable



5585

Ø 5 x 40 cm

Portable



5590

Ø 5 x 45 cm

Bolt-down




5595

Ø 5 x 40 cm

Bolt-down

5580



Finishes

- **24/** __ Beige M1 (NCS S 2005-Y50R)
- **25/** __ Beige D1 (NCS S 4005-Y50R)
- **29/** __ Brown D1 (NCS S 8005-Y50R)
- **38/** __ Terra Dark (NCS S 5040-Y70R)

Materials

Body: Aluminium.
Diffuser: PC- Polycarbonate

Light Source and electronics

1 x LED 4,5W 500 mA
Output: DC 5.0 V 2.0 A 10.0W
Input: 100~240V 50/60Hz

LED Colour Temperature

/1 _ 2700 K - 520 lm
E
CRI >90

Control

5580 __ / 15 Push

Packaging


1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,23 Kg Net weight 0,9 Kg

Notes

Battery capacity 10,000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
6,5h at 100% Intensity.
10h at 66% Intensity.
20h at 33% Intensity.

LED IP20 CE UK ENEC

5585



- Finishes**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 25/ _ _ Beige D1 (NCS S 4005-Y50R)
 - 29/ _ _ Brown D1 (NCS S 8005-Y50R)
 - 38/ _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1_ 2700 K - 520 lm
E
CRI >90

Control
5585 _ _ / 15 Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 4,5W 500 mA
Output: DC 5.0 V 2.0 A 10.0W
Input: 100~240V 50/60Hz

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,23 Kg Net weight 0,9 Kg

Notes
Battery capacity 10,000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
6,5h at 100% Intensity.
10h at 66% Intensity.
20h at 33% Intensity.



5590

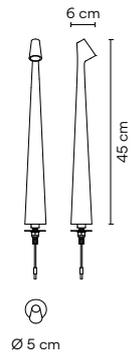

- Finishes**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 25/ _ _ Beige D1 (NCS S 4005-Y50R)
 - 29/ _ _ Brown D1 (NCS S 8005-Y50R)
 - 38/ _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1_ 2700 K - 520 lm
E
CRI >90

Control
5590 _ _ / 15 Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 4,5W 500 mA 9V
Output: DC 5.0 V 2.0 A 10.0W

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,3 Kg Net weight 0,950 Kg

Notes
Electric cable 2 m



5595



- Finishes**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 25/ _ _ Beige D1 (NCS S 4005-Y50R)
 - 29/ _ _ Brown D1 (NCS S 8005-Y50R)
 - 38/ _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1_ 2700 K - 520 lm
E
CRI >90

Control
5595 _ _ / 15 Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,5W 500 mA 9V
Output: DC 5.0 V 2.0 A 10.0W

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,3 Kg Net weight 0,950 Kg

Notes
Electric cable 2 m






A439
Ø 27 cm



A440
Ø 27 cm

A439


Finishes
● 83/ __ Walnut (Tray)

Materials
Tray: Wood (Rustic Walnut)
Output: DC 5.0V 4.0 A.
Input: 100-240V 50/60Hz

Control
A439 83 / 00 On/ Off

Packaging
1 Box 0,350 x 0,350 x 0,090 m
Vol 0,0110 m³
Gross weight 1,2 Kg Net weight 0,750 Kg

Notes
Electric cable with plug.
Electric cable 2 m

**A440**

Finishes
● 83/ __ Walnut (Tray)

Materials
Tray: Wood (Rustic Walnut).
Output: DC 5.0V 4.0 A.
Input: 100-240V 50/60Hz

Control
A440 83 / 00 On/ Off

Packaging
1 Box 0,350 x 0,350 x 0,090 m
Vol 0,0110 m³
Gross weight 1,2 Kg Net weight 0,750 Kg

Notes
Electric cable with plug.
Electric cable 2 m





North


Design by Arik Levy

North features a base, stem, and shade that are disconnected from one another in a dynamic system of adjustable parts. Protruding arms hold triangular shades that direct the light where needed.

Floor



5605

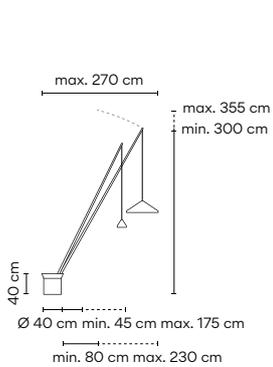

Finishes

- 10/ __ White (NCS S 0300-N)
- 11/ __ Black (NCS S 8500 N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 42 / __ Blue M1 (NCS S 5010-B10G)

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Base: Steel.

Light Source and electronics

2 x LED 9 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

LED Colour Temperature

/1_ 2700 K - 2538,0 lm



CRI >90

Control

5605 __ / 15 Push

Packaging


10 Boxes
Total Vol 0,35 m³
Gross weight 91 Kg Net weight 79,8 Kg

Notes

Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 CE ENEC ENEC Dimmer

5620



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500 N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 42 / __ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature
 /1_ 2700 K - 3807 lm
 D
 CRI >90

Control
 5620 __ / 15 Push

Materials

Rods: Carbon fiber.
 Shade: Aluminum.
 Diffuser: PMMA.
 Base: Steel.

Packaging

12 Boxes
 Total Vol 0,36 m³
 Gross weight 94,85 Kg Net weight 81,25 Kg

Light Source and electronics


3 x LED 9W 350mA
 Constant Current 350 mA
 220~240V 50/60Hz

Notes

Can be connected with or without plug.
 Electric cable 2,5 m



5666



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500 N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 42 / __ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature
 /1_ 2700 K - 1269 lm
 D
 CRI >90
 /2_ 3000 K - 1123 lm
 D
 CRI >80
 /3_ 3500 K - 1374,9 lm
 G
 CRI >90

Control
 5666 __ / _ 5 Push

Materials

Rods: Carbon fiber.
 Shade: Aluminum.
 Diffuser: PMMA.
 Counterweight: Aluminum.

Packaging


2 Boxes 0,24 x 0,217 x 0,21 m
 Total Vol 0,0464 m³
 Gross weight 6,2 Kg Net weight 4,05 Kg

Light Source and electronics

1 x LED 9 W 350 mA
 Constant Current 350 mA
 110~240V 50/60Hz

Notes

Electric cable with plug.
 Electric cable 2,5 m
 Extra cable length.



Height-adjustable shade.



Adjustable-angle rods.
 Can be connected with or without plug.



Wall

**5630**


150 x 195 cm

5630**Finishes**

- **10/** __ White
(NCS S 0300-N)
- **11/** __ Black
(NCS S 8500 N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)
- **42/** __ Blue M1
(NCS S 5010-B10G)

LED Colour Temperature

- /1** _ 2700 K - 1269 lm
 - /2** _ 3000 K - 1123 lm
 - /3** _ 3500 K - 1374,9 lm
- CRI >90
CRI >80

Control**5630** __ / **5** Push**Materials**

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Wall Plate: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,24 m³
Gross weight 11,05 Kg Net weight 5,85 Kg

Notes

Height-adjustable shade.
Push-button on the wall plate.
Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 CE ENEC ENEC

Dimmer Bi-volt



Pendant

INDIVIDUAL MODEL



5660

Ø 16 x 200 cm



5662

Ø 40 x 200 cm



5664

Ø 60 x 200 cm



5670

Ø 16 x 200 cm



5672

Ø 40 x 200 cm



5674


Ø 60 x 200 cm

MULTIPLE MODELS



INDIVIDUAL MODEL

5660



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500 N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 42 / __ Blue M1 (NCS S 5010-B10G)
- Finish customization**
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1_ 2700 K - 1269 lm
 - CRI >90
 - /2_ 3000 K - 1123 lm
 - CRI >80
 - /3_ 3500 K - 1374,9 lm
 - CRI >90

- Control**
- 5660 __ / __
- __ / _ 1 DALI-2
 - __ / _ B Push; 1-10V
 - __ / _ Z Casambi

Select Electrical connection



- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Shade: Aluminum.
 Diffuser: PMMA.
 Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging


1 Box 0,24 x 0,217 x 0,217 m
 Vol 0,01 m³
 Gross weight 2,3 Kg Net weight 1,25 Kg

Notes

5660 __ / _ 1: DALI-2 Bi-volt
 5660 __ / _ B: Push; 1-10V Bi-volt
 Extra cable length.



5662



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500 N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 42 / __ Blue M1 (NCS S 5010-B10G)
- Finish customization**
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1_ 2700 K - 1269 lm
 - CRI >90
 - /2_ 3000 K - 1123 lm
 - CRI >80
 - /3_ 3500 K - 1374,9 lm
 - CRI >90

- Control**
- 5662 __ / __
- __ / _ 1 DALI-2
 - __ / _ B Push; 1-10V
 - __ / _ Z Casambi

Select Electrical connection



- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Shade: Aluminum.
 Diffuser: PMMA.
 Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
 Constant Current 350 mA
 220-240V 50/60Hz

Packaging

1 Box 0,36 x 0,537 x 0,537 m
 Vol 0,10 m³
 Gross weight 4,8 Kg Net weight 2,25 Kg

Notes

5662 __ / _ 1: DALI-2 Bi-volt
 5662 __ / _ B: Push; 1-10V Bi-volt
 Extra cable length.



5664

Finishes


- 10/ _ _ White (NCS S 0300-N)
 - 11/ _ _ Black (NCS S 8500 N)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 42 / _ Blue M1 (NCS S 5010-B10G)
- Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

LED Colour Temperature

- /1 _ 2700 K - 1269 lm
- CRI >90
- /2 _ 3000 K - 1123 lm
- CRI >80
- /3 _ 3500 K - 1374,9 lm
- CRI >90

Control

- 5664 _ _ / _ _
- _ _ / _ 1 DALI-2
 - _ _ / _ B Push; 1-10V
 - _ _ / _ Z Casambi



Select Electrical connection



- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Shade: Aluminum.
 Diffuser: PMMA.
 Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging

1 Box 0,32 x 0,727 x 0,727
 Vol 0,17 m³
 Gross weight 6,25 Kg Net weight 2,95 Kg

Notes

5664 _ _ / _ 1: DALI-2

5664 _ _ / _ B: Push; 1-10V

Extra cable length.





Height-adjustable shade.



MULTIPLE MODELS

Select your model at vibia.com and adjust



See more
multiple models
at vibia.com

- Finishes**
- **10/ __ White**
(NCS S 0300-N)
 - **11/ __ Black**
(NCS S 8500 N)
 - **24/ __ Beige M1**
(NCS S 2005-Y50R)
 - **42 / __ Blue M1**
(NCS S 5010-B10G)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1 _ 2700 K
D
- CRI >90
- /2 _ 3000 K
D
- CRI >80
- /3 _ 3500 K
G
- CRI >90

Control

- Model** __ / __
-
- __ / _ 1 DALI-2
 - __ / _ B Push; 1-10V
 - __ / _ Z Casambi

Select Electrical connection


For each composition, the optimal minimum number of drivers will be delivered.


For Ref. 5660 / 5662 / 5664

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
--	---	--

Regular ceiling
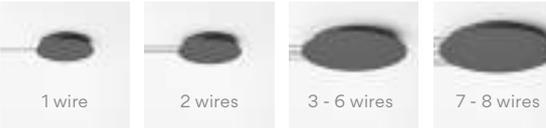
<p>_10 Surface</p>  <p>Ø 18 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire</p> <p>2 wires</p> <p>3 - 6 wires</p> <p>7 - 8 wires</p> <p>Ø 20 cm</p> <p>Ø 22 cm</p> <p>Ø 36 cm</p> <p>Ø 40 cm</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>
---	---

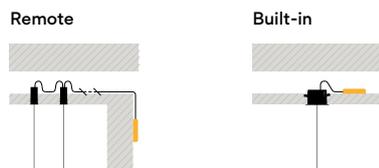


Materials
Shade: Aluminum
Diffuser: PMMA. Canopy: Steel.

Notes
Additional cable length
from 2 m.



5670



Finishes

- 10/ __ White (NCS S 0300-N)
- 11/ __ Black (NCS S 8500 N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 42 / __ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

- /1 _ 2700 K - 1269 lm
- /2 _ 3000 K - 1123 lm
- ☐
- CRI >90 CRI >80
- /3 _ 3500 K - 1374 lm
- ☐
- CRI >90

Control

- 5670 __ / __
-
- __ / __ 1 DALI-2
- __ / __ B Push; 1-10V
-
- __ / __ Z Casambi

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,06 m³
Gross weight 5,75 Kg Net weight 2 Kg

Notes


5670 __ / __ 1: DALI-2 **Bi-volt**

5670 __ / __ B: Push; 1-10V **Bi-volt**

Extra cable length.

LED IP20 CE UK ENEC

5672



Finishes

- 10/ __ White (NCS S 0300-N)
- 11/ __ Black (NCS S 8500 N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 42 / __ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

- /1 _ 2700 K - 1269 lm
- /2 _ 3000 K - 1123 lm
- ☐
- CRI >90 CRI >80
- /3 _ 3500 K - 1374 lm
- ☐
- CRI >90

Control

- 5672 __ / __
-
- __ / __ 1 DALI-2
- __ / __ B Push; 1-10V
-
- __ / __ Z Casambi

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,14 m³
Gross weight 8,25 Kg Net weight 3 Kg

Notes


5672 __ / __ 1: DALI-2 **Bi-volt**

5672 __ / __ B: Push; 1-10V **Bi-volt**

Extra cable length.

LED IP20 CE UK ENEC

5674



Finishes

- 10/ __ White (NCS S 0300-N)
- 11/ __ Black (NCS S 8500 N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 42 / __ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

- /1 _ 2700 K - 1269 lm
- /2 _ 3000 K - 1123 lm
- ☐
- CRI >90 CRI >80
- /3 _ 3500 K - 1374 lm
- ☐
- CRI >90

Control

- 5674 __ / __
-
- __ / __ 1 DALI-2
- __ / __ B Push; 1-10V
-
- __ / __ Z Casambi

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,21 m³
Gross weight 9,7 Kg Net weight 3,7 Kg

Notes

5674 __ / __ 1: DALI-2 **Bi-volt**

5674 __ / __ B: Push; 1-10V **Bi-volt**

Extra cable length.

LED IP20 CE UK ENEC



Lily


Design by Ludovica+Roberto Palomba

The simplicity of Lily's refined silhouette makes this fixture ideal for an elegant interior with a relaxed ambience. Its graceful glass diffuser radiates brings a sense of warmth and wellbeing.

Table Floor Pendant



5720



- Finishes
- 11/ _ _ Black (NCS S 8500-N)
 - 25/ _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm

LED E

CRI >90

Control

5720 _ _ / _ _

_ _ / 15 Push

_ _ / 1Y ProtoPixel*

_ _ / 1Z Casambi

Materials

Body: Steel.
Diffuser: Triple opal blown glass.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,59 x 0,68 x 0,54 m
Vol 0,21 m³
Gross weight 10 Kg Net weight 5 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Electric cable 2,5 m.

LED IP20 CE UK ENEC

5725

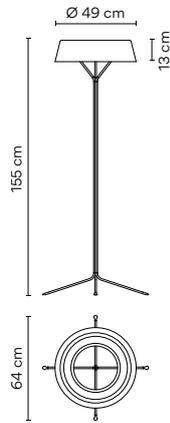

- Finishes**
- 11/ __ Black
(NCS S 8500-N)
 - 25/ __ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 2170 lm
E
CRI >90

Control

5725 __ / __

- __ / 15 Push
- __ / 1Y ProtoPixel*
- __ / 1Z Casambi

Materials

Body: Steel.
Diffuser: Triple opal blown glass.

Light Source and electronics
1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100-240V 50/60Hz


Packaging

1 Box 1,57 x 0,49 x 0,49 m
Vol 0,277 m³
Gross weight 14,2 Kg Net weight 8,20 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Electric cable 2,5 m.

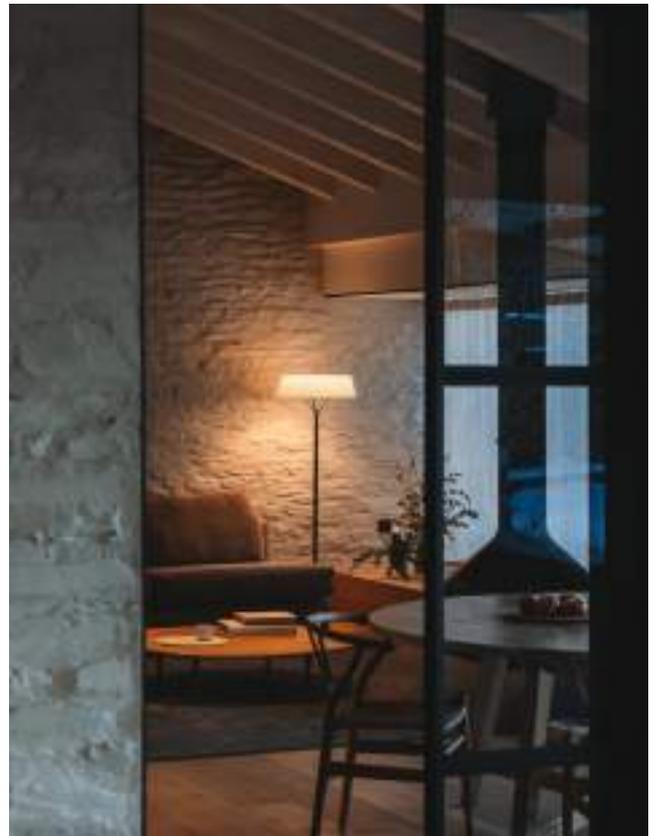

5730



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
 /1_ 2700 K - 2170 lm
 E
 CRI >90

Control

5730 _ _ / _ _
 _ _ / 11 DALI-2
 _ _ / 1B Push; 1-10V
 _ _ / 1Z Casambi

⚡ Select Eletrical connection



Surface Built-in XS Remote Micro Remote XXS

- _10 Surface
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Body: Aluminium.
 Shade: Triple opal blown glass.

Light Source and electronics

1 x LED STRIP 16,2 W 900 mA
 Constant Current 900mA
 110-240V 50/60Hz

Packaging

1 Box 0,27 x 0,60 x 0,60 m
 Vol 0,972 m³
 Gross weight 6 Kg Net weight 2 Kg

Notes

Extra cable length.



⚡ Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5730

Drop ceiling


_31 Remote Micro	_32 Remote XXS	_23 Built-in XS
		
Ø 3 cm height 7 cm	Ø 6 cm height 6 cm	Ø 8 cm height 6 cm
for plaster ceilings. Black finish.	for all types of drop ceilings. Match with fixture finish.	match with fixture finish.

Regular ceiling


_10 Surface


Ø 17,3 cm
match with fixture finish.

Remote



Built-in



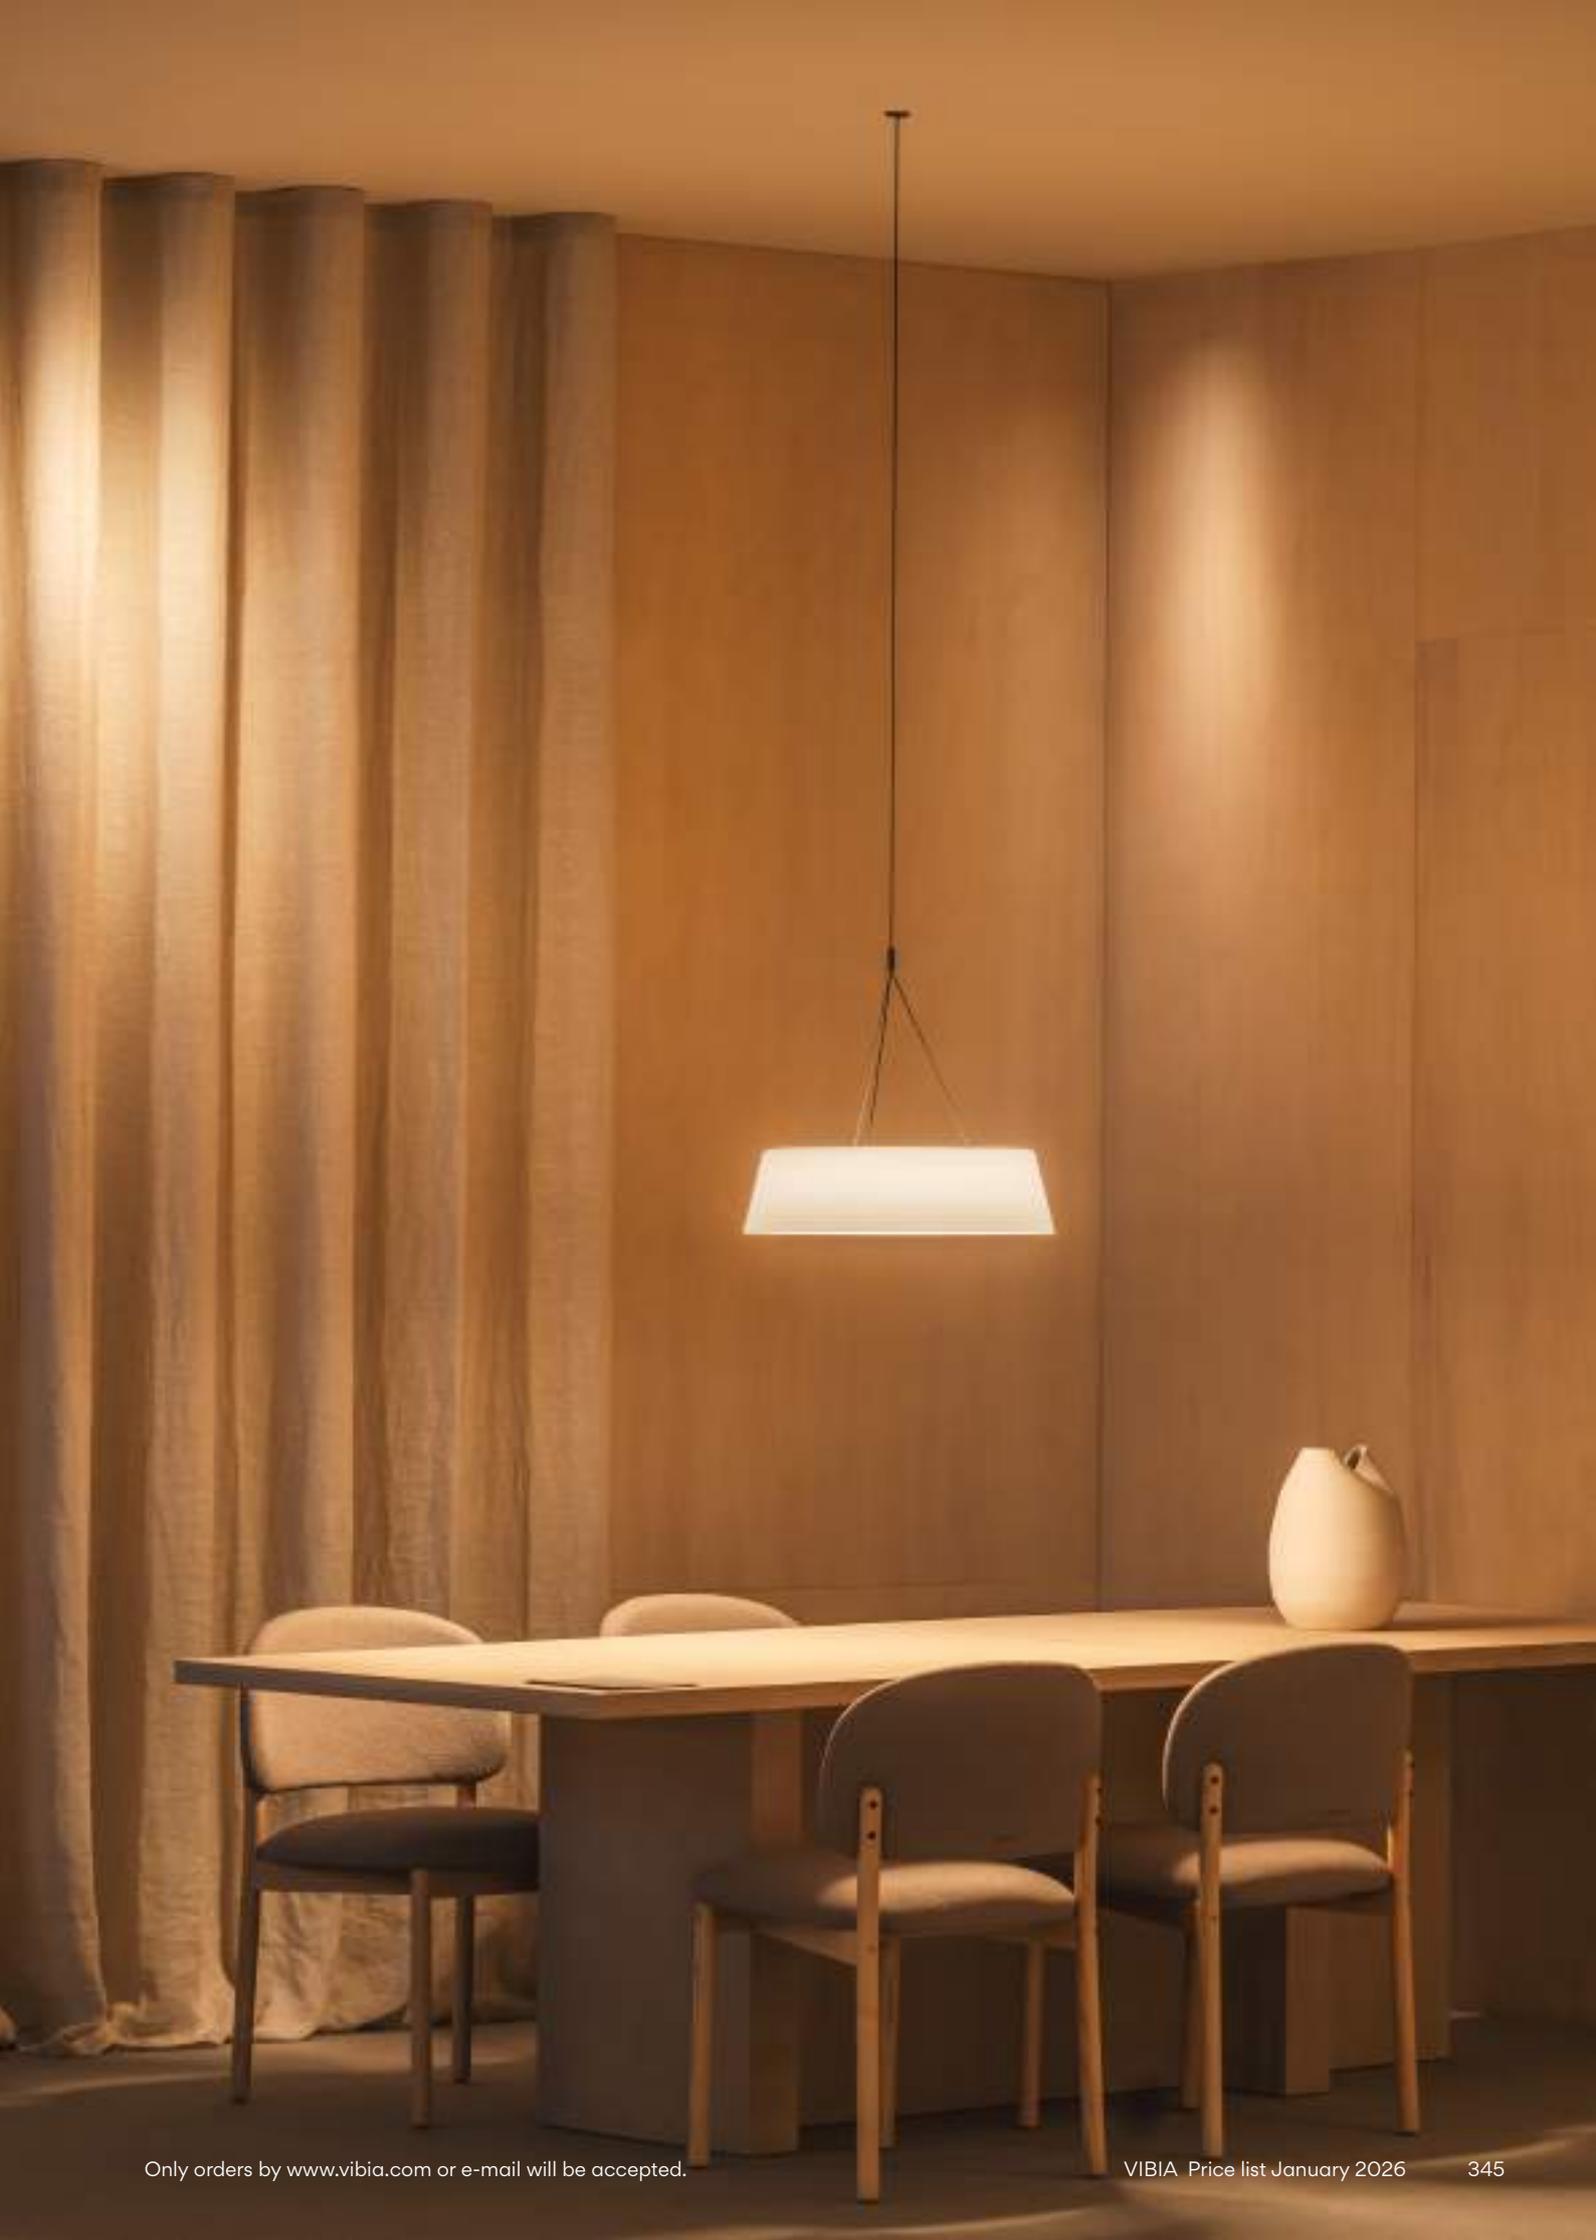

Tempo

Design by Lievore, Altherr

The Tempo collection reclaims our collective memory of light, distilling lighting archetypes to their most basic forms. Vibia presents three designs in two sizes: the disc, the diamond and the milk glass oval - all inspired by the interplay of opacity, translucence and transparency.

Wall



5756 5757

122,5 x 80 cm



5758 5759

116,5 x 80 cm



5760 5761

120 x 80 cm



5762 5763

42,5 x 140 cm




5764 5765

36,5 x 140 cm




5766 5767

40 x 140 cm




Ref.
5757, 5759, 5761, 5763, 5765, 5767.
Recessed dimmable driver.



Ref.
5756, 5758, 5760, 5762, 5764, 5766.
Push dimmer on the cable.
With plug.

5756



- Finishes**
- 18/ __ Graphite (ADAPTA RF9913WX)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 58/ __ Cream (RAL 7044)
 - 62/ __ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5756 __ / 15 Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.
Shade: Aluminum.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,082 m³
Gross weight 4,3 Kg Net weight 2,5 Kg

Notes
Push dimmer on the cable. With plug (4 m)



5757



- Finishes**
- 18/ __ Graphite (ADAPTA RF9913WX)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 58/ __ Cream (RAL 7044)
 - 62/ __ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5757 __ / __
__ / _ 1 DALI-2
__ / _ B Push; 1-10V
__ / _ Z Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.
Shade: Aluminum.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,082 m³
Gross weight 4,3 Kg Net weight 2,5 Kg

Notes
Recessed dimmable driver (2,5 m)



5758



- Finishes**
- 18/ __ Graphite (ADAPTA RF9913WX)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 58/ __ Cream (RAL 7044)
 - 62/ __ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5758 __ / 15 Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,5 Kg Net weight 1,7 Kg

Notes
Push dimmer on the cable. With plug (4 m).



5759



- Finishes**
- **18/** __ Graphite (ADAPTA RF9913WX)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **58/** __ Cream (RAL 7044)
 - **62/** __ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1_ 2700 K - 415 lm
E

CRI >90

Control
5759 __ / __

- __ / __ 1 DALI-2
- __ / __ B Push; 1-10V
- __ / __ Z Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,5 Kg Net weight 1,7 Kg

Notes
Recessed dimmable driver (2,5 m)

LED IP20 CE UK ENEC Ø 7,5 cm

5760



- Finishes**
- **18/** __ Graphite (ADAPTA RF9913WX)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **58/** __ Cream (RAL 7044)
 - **62/** __ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1_ 2700 K - 415 lm
E

CRI >90

Control
5760 __ / 15 Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,7 Kg Net weight 1,9 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 CE UK ENEC Dimmer

5761



- Finishes**
- **18/** __ Graphite (ADAPTA RF9913WX)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **58/** __ Cream (RAL 7044)
 - **62/** __ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1_ 2700 K - 415 lm
E

CRI >90

Control
5761 __ / __

- __ / __ 1 DALI-2
- __ / __ B Push; 1-10V
- __ / __ Z Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,7 Kg Net weight 1,9 Kg

Notes
Recessed dimmable driver (2,5 m)

LED IP20 CE UK ENEC Ø 7,5 cm

5762



Finishes

- 18/ _ _ Graphite (ADAPTA RF9913WX)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 58/ _ _ Cream (RAL 7044)
- 62/ _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
 E

Control

5762 _ _ / 15 Push

Materials

Diffuser: Blown-glass.
 LED support: Aluminum.
 Structures: Steel.
 Shade: Aluminum.

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 220-240V 50/60Hz

Packaging


2 Boxes
 Total Vol 0,088 m³
 Gross weight 3,2 Kg Net weight 2 Kg

Notes

Push dimmer on the cable. With plug (4 m)



5763



Finishes

- 18/ _ _ Graphite (ADAPTA RF9913WX)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 58/ _ _ Cream (RAL 7044)
- 62/ _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
 E

Control

5763 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ B Push; 1-10V
 _ _ / _ Z Casambi

Materials

Diffuser: Blown-glass.
 LED support: Aluminum.
 Structures: Steel.
 Shade: Aluminum.

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 220-240V 50/60Hz

Packaging


2 Boxes
 Total Vol 0,088 m³
 Gross weight 3,2 Kg Net weight 2 Kg

Notes

Recessed dimmable driver (2,5 m)



5764



Finishes

- 18/ _ _ Graphite (ADAPTA RF9913WX)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 58/ _ _ Cream (RAL 7044)
- 62/ _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
 E

Control

5764 _ _ / 15 Push

Materials

Diffuser: Blown-glass.
 LED support: Aluminum.
 Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 220-240V 50/60Hz

Packaging


2 Boxes
 Total Vol 0,088 m³
 Gross weight 2,45 Kg Net weight 1,25 Kg

Notes

Push dimmer on the cable. With plug (4 m)




5765



<p>Finishes</p> <ul style="list-style-type: none"> ● 18/ __ Graphite (ADAPTA RF9913WX) ● 37/ __ Terra Red (NCS S 4040-Y70R) ● 58/ __ Cream (RAL 7044) ● 62/ __ Green (NCS S 3010-G20Y) 	<p>LED Colour Temperature</p> <p>/1_ 2700 K - 415 lm</p> <p>E ></p> <p>CRI >90</p>	<p>Control</p> <p>5765 __ / __</p> <hr/> <p>__ / __ 1 DALI-2</p> <p>__ / __ B Push; 1-10V</p> <hr/> <p>__ / __ Z Casambi</p>
---	--	---

<p>Materials</p> <p>Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel.</p> <p>Light Source and electronics</p> <p>1 x LED 4 W 350 mA Constant Current 350 mA 220-240V 50/60Hz</p>	<p>Packaging</p> <p>2 Boxes Total Vol 0,088 m³ Gross weight 2,45 Kg Net weight 1,25 Kg</p> <p>Notes</p> <p>Recessed dimmable driver (2,5 m)</p> <p>LED IP20 CE UK ERC Ø</p> <p>Ø 7,5 cm</p>
---	--


5766



<p>Finishes</p> <ul style="list-style-type: none"> ● 18/ __ Graphite (ADAPTA RF9913WX) ● 37/ __ Terra Red (NCS S 4040-Y70R) ● 58/ __ Cream (RAL 7044) ● 62/ __ Green (NCS S 3010-G20Y) 	<p>LED Colour Temperature</p> <p>/1_ 2700 K - 415 lm</p> <p>E ></p> <p>CRI >90</p>	<p>Control</p> <p>5766 __ / 15 Push</p>
---	--	---

<p>Materials</p> <p>Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel.</p> <p>Light Source and electronics</p> <p>1 x LED 4 W 350 mA Constant Current 350 mA 220-240V 50/60Hz</p>	<p>Packaging</p> <p>2 Boxes Total Vol 0,088 m³ Gross weight 2,65 Kg Net weight 1,45 Kg</p> <p>Notes</p> <p>Push dimmer on the cable. With plug (4 m)</p> <p>LED IP20 CE UK ERC Ø Dimmer</p>
---	---

5767



<p>Finishes</p> <ul style="list-style-type: none"> ● 18/ __ Graphite (ADAPTA RF9913WX) ● 37/ __ Terra Red (NCS S 4040-Y70R) ● 58/ __ Cream (RAL 7044) ● 62/ __ Green (NCS S 3010-G20Y) 	<p>LED Colour Temperature</p> <p>/1_ 2700 K - 415 lm</p> <p>E ></p> <p>CRI >90</p>	<p>Control</p> <p>5767 __ / __</p> <hr/> <p>__ / __ 1 DALI-2</p> <p>__ / __ B Push; 1-10V</p> <hr/> <p>__ / __ Z Casambi</p>
---	--	---

<p>Materials</p> <p>Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel.</p> <p>Light Source and electronics</p> <p>1 x LED 4 W 350 mA Constant Current 350 mA 220-240V 50/60Hz</p>	<p>Packaging</p> <p>2 Boxes Total Vol 0,088 m³ Gross weight 2,65 Kg Net weight 1,45 Kg</p> <p>Notes</p> <p>Recessed dimmable driver (2,5 cm)</p> <p>LED IP20 CE UK ERC Ø</p> <p>Ø 7,5 cm</p>
---	---




Pendant

INDIVIDUAL MODEL




MULTIPLE MODELS

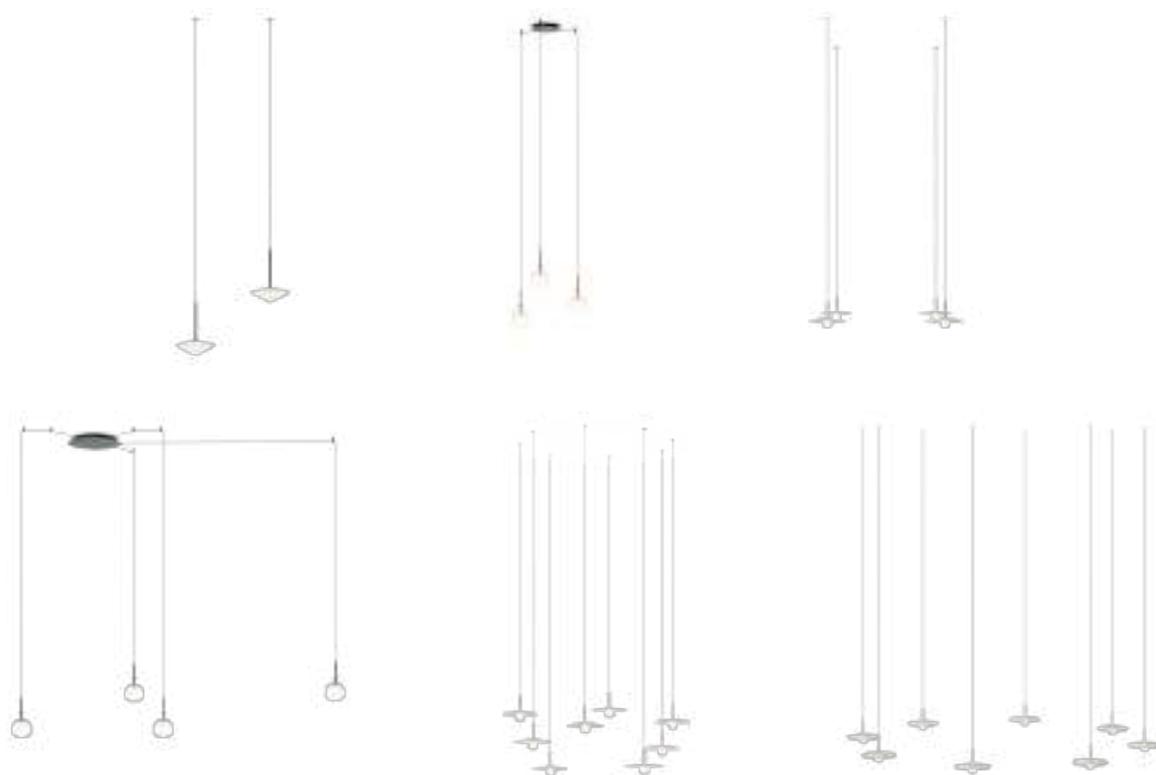

INDIVIDUAL MODEL

5770



Finishes

- 18/ __ Graphite (ADAPTA RF9913WX)
- 37/ __ Terra Red (NCS S 4040-Y70R)
- 58/ __ Cream (RAL 7044)
- 62/ __ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1_ 2700 K - 415 lm
 E

Control

5770 __ / __
 __ / _ 1 DALI-2
 __ / _ B Push; 1-10V
 __ / _ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: Blown-glass.
 LED support: Aluminum.
 Shade: Aluminum.
 Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging


1 Box 0,28 x 0,26 x 0,13 m
 Vol 0,01 m³
 Gross weight 2,5 Kg Net weight 2 Kg

Notes

5770 __ / _ 1: DALI-2 **Bi-volt**
 5770 __ / _ B: Push; 1-10V **Bi-volt**
 Extra cable length.



5772



Finishes

- 18/ __ Graphite (ADAPTA RF9913WX)
- 37/ __ Terra Red (NCS S 4040-Y70R)
- 58/ __ Cream (RAL 7044)
- 62/ __ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1_ 2700 K - 415 lm
 E

Control

5772 __ / __
 __ / _ 1 DALI-2
 __ / _ B Push; 1-10V
 __ / _ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: Blown-glass.
 LED support: Aluminum.
 Shade: Aluminum.
 Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging


1 Box 0,28 x 0,2 x 0,27 m
 Vol 0,015 m³
 Gross weight 1,8 Kg Net weight 1,2 Kg

Notes

5772 __ / _ 1: DALI-2 **Bi-volt**
 5772 __ / _ B: Push; 1-10V **Bi-volt**
 Extra cable length.



5774



- Finishes**
- **18/** __ Graphite (ADAPTA RF9913WX)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **58/** __ Cream (RAL 7044)
 - **62/** __ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1_ 2700 K - 415 lm
E

CRI >90

Control
5774 __ / __

- __ / __ **1** DALI-2
- __ / __ **B** Push; 1-10V
- __ / __ **Z** Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- __ **10** Surface
- __ **18** Free Wire
- __ **23** Built-in XS
- __ **31** Remote Micro
- __ **32** Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics


1 x LED 4 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging


1 Box 0,28 x 0,2 x 0,27 m
Vol 0,015 m³
Gross weight 2 Kg Net weight 1,4 Kg

Notes

5774 __ / __ 1: DALI-2
5774 __ / __ B: Push; 1-10V
Extra cable length.



5776



- Finishes**
- **18/** __ Graphite (ADAPTA RF9913WX)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **58/** __ Cream (RAL 7044)
 - **62/** __ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1_ 2700 K - 415 lm
E

CRI >90

Control
5776 __ / __

- __ / __ **1** DALI-2
- __ / __ **B** Push; 1-10V
- __ / __ **Z** Casambi

Select Electrical connection



Surface Built-in XS Remote Micro Remote XXS

- __ **10** Surface
- __ **23** Built-in XS
- __ **31** Remote Micro
- __ **32** Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics


1 x LED 4 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging


1 Box 0,45 x 0,45 x 0,12 m
Vol 0,023 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes

5776 __ / __ 1: DALI-2
5776 __ / __ B: Push; 1-10V
Extra cable length.



5778



Finishes

- 18/ _ _ Graphite (ADAPTA RF9913WX)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 58/ _ _ Cream (RAL 7044)
- 62/ _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1_ 2700 K - 415 lm
 E →
 CRI >90

Control

5778 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ B Push; 1-10V
 _ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

_10 Surface
 _18 Free Wire
 _23 Built-in XS
 _31 Remote Micro
 _32 Remote XXS

Materials

Diffuser: Blown-glass.
 LED support: Aluminum.
 Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging


1 Box 0,33 x 0,33 x 0,42 m
 Vol 0,045 m³
 Gross weight 4 Kg Net weight 2,5 Kg

Notes

5778 _ _ / _ 1: DALI-2 **Bi-volt**
 5778 _ _ / _ B: Push; 1-10V **Bi-volt**
 Extra cable length.



5780



Finishes

- 18/ _ _ Graphite (ADAPTA RF9913WX)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 58/ _ _ Cream (RAL 7044)
- 62/ _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1_ 2700 K - 415 lm
 E →
 CRI >90

Control

5780 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ B Push; 1-10V
 _ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Built-in XS Remote Micro Remote XXS

_10 Surface
 _23 Built-in XS
 _31 Remote Micro
 _32 Remote XXS

Materials

Diffuser: Blown-glass.
 LED support: Aluminum.
 Shade: Aluminum.
 Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging

1 Box 0,41 x 0,41 x 0,23 m
 Vol 0,038 m³
 Gross weight 4 Kg Net weight 2,5 Kg

Notes



5780 _ _ / _ 1: DALI-2 **Bi-volt**
 5780 _ _ / _ B: Push; 1-10V **Bi-volt**
 Extra cable length.



Tempo

MULTIPLE MODELS

Select your model at vibia.com and adjust



See more
multiple models
at vibia.com

- Finishes**
- **18/** _ _ Graphite (ADAPTA RF9913WX)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **58/** _ _ Cream (RAL 7044)
 - **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1_ 2700 K
CRI >90

Control
Model _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5770, 5772, 5774

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

Regular ceiling

<p>_10 Surface</p>  <p>Ø 16 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	--	---	---

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5778

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

<p>_10 Surface</p>  <p>Ø 20 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>2 - 3 wires</p> <p>Ø 20 cm</p>	 <p>2 - 3 wires</p> <p>Ø 22 cm</p>	 <p>4 - 5 wires</p> <p>Ø 36 cm</p>
--	---	---	---

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5776, 5780

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---


_10
Surface




Ø 20 cm

match with fixture finish.

Remote



Built-in



Materials

Diffuser: Blown-glass. LED support: Aluminum.
Shade: Aluminum. Canopy: Steel.

Notes

Additional cable length from 2 m.



Flat

Design by Ichiro Iwasaki

Flat's distinctive, disc-shaped diffusers form horizontal planes of light that integrate with the surrounding architecture. A study in geometry, the collection creates layers of light that infuse a space with a soothing, Zen sensitivity.

Ceiling



5920

Ø 40 cm



5915

Ø 55 cm



5926

Ø 90 cm



5905

101 x 88 cm



5910

106 x 90 cm



5922


178 x 149 cm



5924

186 x 149 cm

5905



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 71/ _ _ White, Green L1, Off-White (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

LED Colour Temperature

- /1_ 2700 K - 5906 lm
- E
- /3_ 3500 K - 6344 lm
- F
- CRI >90

Control

5905 _ _ / _ A Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 4 x LED PLATE 13,5 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging


1 Box 0,75 x 0,45 x 0,25 m
 Vol 0,0844 m³
 Gross weight 17,15 Kg Net weight 15,38 Kg

Notes

* Electrical connection point



5910



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 72/ _ _ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y)
- 73/ _ _ White, Off-White (NCS S 0300-N, NCS S 1000-N)

LED Colour Temperature

- /1_ 2700 K - 4430 lm
- E
- /3_ 3500 K - 4758 lm
- F
- CRI >90

Control

5910 _ _ / _ A Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 3 x LED PLATE 13,5 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging


1 Box 0,80 x 0,70 x 0,30 m
 Vol 0,1680 m³
 Gross weight 11,90 Kg Net weight 9,10 Kg

Notes

* Electrical connection point



5915



Finishes

- 10/ _ _ White (NCS S 0300-N)

LED Colour Temperature

- /1_ 2700 K - 2953 lm
- E
- /3_ 3500 K - 3172 lm
- F
- CRI >90

Control

5915 10 / _ A Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 2 x LED PLATE 13,5 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging


1 Box 0,65 x 0,65 x 0,25 m
 Vol 0,0106 m³
 Gross weight 6,80 Kg Net weight 4,73 Kg

Notes

* Electrical connection point



5920



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 13/ __ Off-White (NCS S 1000-N)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1_ 2700 K - 1740 lm
/3_ 3500 K - 1868 lm

CRI >90

Control

5920 __ / __

__ / __ 1 DALI-2
__ / __ B Push; 1-10V

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging


1 Box 0,45 x 0,45 x 0,25 m
Vol 0,0051 m³
Gross weight 3,10 Kg Net weight 1,91 Kg

Notes

* Electrical connection point

LED IP20 CE UK ENE Dimmer Bi-volt

5922



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 71/ __ White, Green L1, Off-White (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

LED Colour Temperature

/1_ 2700 K - 13920 lm
/3_ 3500 K - 14951 lm

CRI >90

Control

5922 __ / __

__ / __ A Push; 1-10V; DALI-2
__ / __ Z Casambi

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

4 x LED PLATE 25 W 700mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging


1 Box 1,35 x 1,20 x 0,30 m
Vol 0,0486 m³
Gross weight 26,60 Kg Net weight 19,98 Kg

Notes

* Electrical connection point

LED IP20 CE UK ENE Dimmer

5924



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 72/ __ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y)
 - 73/ __ White, Off-White (NCS S 0300-N, NCS S 1000-N)

LED Colour Temperature

/1_ 2700 K - 9897 lm
/3_ 3500 K - 10630 lm

CRI >90

Control

5924 __ / __

__ / __ A Push; 1-10V; DALI-2
__ / __ Z Casambi

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

3 x LED PLATE 25 W 700mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging


1 Box 1,45 x 1,10 x 0,25 m
Vol 0,0399 m³
Gross weight 27 Kg Net weight 20,80 Kg

Notes

* Electrical connection point

LED IP20 CE UK ENE Dimmer

5926



Finishes
 ● 10/ _ _ White
 (NCS S 0300-N)

LED Colour Temperature
 /1_ 2700 K - 6598 lm
 [D]
 /3_ 3500 K - 7086 lm
 [E]
 CRI >90

Control
 5926 10 / _ A Push; 1-10V; DALI-2

Materials
 Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 2 x LED PLATE 25 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging
 1 Box 1,05 x 1,05 x 0,25 m
 Vol 0,0276 m³
 Gross weight 14,60 Kg Net weight 10,08 Kg

Notes
 * Electrical connection point



Pendant

INDIVIDUAL MODEL



5930
Ø 90 cm




5935
Ø 40 cm




5940
Ø 55 cm

MULTIPLE MODELS



INDIVIDUAL MODEL

5930

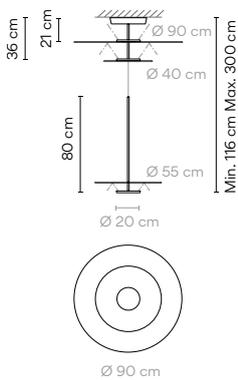

Finishes

- 13/ _ _ Off-White (NCS S 1000-N)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 9897 lm
- /3 _ 3500 K - 10630 lm
- CRI >90

Control

- 5930 _ _ / _ _
- _ _ / _ A Push; 1-10V; DALI-2
 - _ _ / _ Z Casambi

Materials

Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics

3 x LED PLATE 25 W 700mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging


1 Box 0,96x0,96x0,50 m
 Vol 0,4608 m³
 Gross weight 27,9 Kg Net weight 22 Kg

Notes

Adjust the height on installation



5935



Finishes

- 13/ _ _ Off-White (NCS S 1000-N)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 1740 lm
- /3 _ 3500 K - 1868 lm
- CRI >90

Control

- 5935 _ _ / _ _
- _ _ / _ 1 DALI-2
 - _ _ / _ B Push; 1-10V
 - _ _ / _ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging


1 Box 0,71 x 0,13 x 0,71 m
 Vol 0,0655 m³
 Gross weight 6,10 Kg Net weight 5 Kg

Notes

Extra cable length.



5940



Finishes

- 13/ _ _ Off-White (NCS S 1000-N)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 1740 lm
- /3 _ 3500 K - 1868 lm
- CRI >90

Control

- 5940 _ _ / _ _
- _ _ / _ 1 DALI-2
 - _ _ / _ B Push; 1-10V
 - _ _ / _ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging

1 Box 0,71 x 0,13 x 0,71 m
 Vol 0,0665 m³
 Gross weight 7 Kg Net weight 6 Kg

Notes

Extra cable length.



Flat

MULTIPLE MODELS

Select your model at vibia.com and adjust



See more
multiple models
at vibia.com

Finishes

- 13/ _ _ Off-White (NCS S 1000-N)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1 _ 2700 K
- /3 _ 3500 K
- CRI >90

Control

- Model _ _ / _ _
-
- _ _ / _ 1 DALI-2
 - _ _ / _ B Push; 1-10V
 - _ _ / _ Z Casambi

⚡ Select Electrical connection


For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5935

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

Regular ceiling

<p>_10 Surface</p>  <p>Ø 16,7 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 - 3 wires</p> <p>Ø 22 cm</p>	 <p>4 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	--	--	---	---

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5940 _ _ / _ 1 / _ B

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

Regular ceiling

<p>_10 Surface</p>  <p>Ø 16,7 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 - 3 wires</p> <p>Ø 22 cm</p>	 <p>4 - 5 wires</p> <p>Ø 36 cm</p>
--	--	--	---

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5940 _ _ / _ Z

Drop ceiling


<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

Regular ceiling


<p>_18 Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 - 3 wires</p> <p>Ø 22 cm</p>	 <p>4 - 5 wires</p> <p>Ø 36 cm</p>
--	---	--

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in



Materials

Shade: Aluminum Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum

Notes

Additional cable length from 2 m.



Floor



5945
76 x 64 x 90 cm



5950
Ø 55 x 43 cm




5955
46 x 25 x 100 cm



5957
48 x 35 x 96 cm

5945




<p>Finishes</p> <ul style="list-style-type: none"> ● 13/ _ _ Off-White (NCS S 1000-N) ● 47/ _ _ Green L1 (NCS S 4005-G80Y) 	<p>LED Colour Temperature</p> <p>/1_ 2700 K - 1365 lm /3_ 3500 K - 1467 lm</p> <p>F </p> <p>CRI >90</p>	<p>Control</p> <p>5945 _ _ / _ 5 Push (with or without memory)</p>
---	--	--

<p>Materials</p> <p>Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel.</p> <p>Light Source and electronics</p> <p>2 x LED PLATE 7 W 400 mA Constant Voltage 24V 110-240V 50/60Hz</p>	<p>Packaging</p> <p>1 Box 0,65 x 1,00 x 0,25 m Vol 0,0163 m³ Gross weight 15,85 Kg Net weight 15,25 Kg</p> <p>Notes</p> <p>Electric cable 2 m</p>
--	--



5950




<p>Finishes</p> <ul style="list-style-type: none"> ● 10/ _ _ White (NCS S 0300-N) 	<p>LED Colour Temperature</p> <p>/1_ 2700 K - 682 lm /3_ 3500 K - 733 lm</p> <p>F </p> <p>CRI >90</p>	<p>Control</p> <p>5950 10 / _ 5 Push (with or without memory)</p>
---	--	---

<p>Materials</p> <p>Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel.</p> <p>Light Source and electronics</p> <p>1 x LED PLATE 7 W 400 mA Constant Voltage 24V 110-240V 50/60Hz</p>	<p>Packaging</p> <p>1 Box 0,65 x 0,65 x 0,20 m Vol 0,0085 m³ Gross weight 14,60 Kg Net weight 12,71 Kg</p> <p>Notes</p> <p>Electric cable 2 m</p>
--	--





5955



- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **47/** __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 682 lm
 /3 _ 3500 K - 733 lm

☐ F ☐

CRI >90

Control

5955 __ / __ **5** Push
 (with or without memory)

Materials

Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.

Light Source and electronics

1 x LED PLATE 7 W 400 mA
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging


1 Box 0,30 x 1,10 x 0,10 m
 Vol 0,0033 m³
 Gross weight 4,80 Kg Net weight 3,50 Kg

Notes

Electric cable 2 m



5957



- Finishes**
- **13/** __ Off-White (NCS S 1000-N)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **47/** __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 682 lm
 /3 _ 3500 K - 733 lm

☐ F ☐

CRI >90

Control

5957 __ / __ **5** Push
 (with or without memory)

Materials

Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.

Light Source and electronics

1 x LED PLATE 7 W 400 mA
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging

1 Box 0,40 x 1,10 x 0,10 m
 Vol 0,0044 m³
 Gross weight 6,10 Kg Net weight 4,46 Kg

Notes

Electric cable 2 m



Flat

Table



5965
35 x Ø 30 x 16 cm



5970
29 x 17 x 30 cm




5972
11 x 30 cm

Bolt-down



5965



- Finishes**
- 13/ __ Off-White (NCS S 1000-N)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 682 lm

☐ F >

CRI >90

Control

5965 __ /15 Push (with or without memory)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics

1 x LED PLATE 7W 400mA
Constant Voltage 24V
110-240V 50/60Hz

Packaging


1 Box 0,50 x 0,50 x 0,7 m
Vol 0,0018 m³
Gross weight 4 Kg Net weight 3,11 Kg

Notes

Electric cable 2 m



5970



- Finishes**
- 11/ __ Black (NCS S 8500-N)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 682 lm

☐ F >

CRI >90

Control

5970 __ /15 Push (with or without memory)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics

1 x LED PLATE 7W 400mA
Constant Voltage 24V
110-240V 50/60Hz

Packaging


1 Box 0,20 x 0,40 x 0,07 m
Vol 0,0072 m³
Gross weight 4 Kg Net weight 3,11 Kg

Notes

Electric cable 2 m



5972



- Finishes**
- 11/ __ Black (NCS S 8500-N)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 682 lm

☐ F >

CRI >90

Control

5972 __ /15 Push (with or without memory)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics

1 x LED PLATE 7W 400mA
Constant Voltage 24V
110-240V 50/60Hz

Packaging

1 Box 0,15 x 0,13 x 0,36 m
Vol 0,00702 m³
Gross weight 0,9 Kg Net weight 0,6 Kg

Notes

Electric cable 2 m



Spa

Design by Ramos & Bassols

Spa is the perfect lighting solution for any wellness space. From public dressing rooms, restaurants and spas, to private kitchens, corridors and bathrooms, its graceful simplicity allows for easy cleaning and seamless integration within the surrounding architecture of a variety of interiors.

Ceiling Wall



5975

121 x 4,7 x 6,5 cm



5977

201 x 4,7 x 6,5 cm



5979

301 x 4,7 x 6,5 cm



5981

253 x 4,8 x 6,6 cm



5983


413 x 4,8 x 6,6 cm



5985

613 x 4,8 x 6,6 cm

5975



Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1 2700 K - 1560 lm	5975 __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	/3 3500 K - 1290 lm	__ / 1 DALI-2
● 25/ __ Beige D1 (NCS S 4005-Y50R)	E >90	__ / 3 1-10V
		__ / Z 30 Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics


1 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging

1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

LED ⓘ IP44 CE UK ENEC ⓘ Dimmer

5977



Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1 2700 K - 2560 lm	5977 __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	/3 3500 K - 3360 lm	__ / 1 DALI-2
● 25/ __ Beige D1 (NCS S 4005-Y50R)	E >90	__ / 3 1-10V
		__ / Z 30 Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics


1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging

1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6

LED ⓘ IP44 CE UK ENEC ⓘ Dimmer

5979



Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1 2700 K - 3840 lm	5979 __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	/3 3500 K - 5040 lm	__ / 1 DALI-2
● 25/ __ Beige D1 (NCS S 4005-Y50R)	E >90	__ / 3 1-10V
		__ / Z 30 Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics


1 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging

1 Box 3,3 x 0,1 x 0,1 m
Vol 0,033 m³
Gross weight 6,9 Kg Net weight 3,6 Kg

LED ⓘ IP44 CE UK ENEC ⓘ Dimmer

5981



Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 3120 lm
● 23/ __ Warm White (NCS S 0502-Y50R)	/3_ 3500 K - 3840 lm
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90

Control
5981 __ / __

__ / _1 DALI-2
__ / _3 1-10V
__ / _Z _30 Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics


2 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,030 m³
Gross weight 5,8 Kg Net weight 2,8 Kg

LED IP44

5983



Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 5120 lm
● 23/ __ Warm White (NCS S 0502-Y50R)	/3_ 3500 K - 6720 lm
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90

Control
5983 __ / __

__ / _1 DALI-2
__ / _3 1-10V
__ / _Z _30 Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

2 x LED STRIP 21,6 W 600 mA
Constant Current 1200 mA
220-240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,046 m³
Gross weight 9,4 Kg Net weight 4,8 Kg

Notes

5983 __ / _1: DALI-2

LED IP44

5985



Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 7680 lm
● 23/ __ Warm White (NCS S 0502-Y50R)	/3_ 3500 K - 10080 lm
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90

Control
5985 __ / __

__ / _1 _30 DALI-2 (Remote)
__ / _3 _30 1-10V (Remote)
__ / _Z _30 Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA..

Light Source and electronics

2 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA Remote
220-240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,066 m³
Gross weight 13,5 Kg Net weight 6,9 Kg

LED IP44

Wall Vanity light



5987
L 121 cm




5989
L 201 cm



5991
L 301 cm

5987



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 1560 lm
- /3** _ 3500 K - 1920 lm
- E** >
- CRI >90

Control

- 5987** _ _ / _ _
-
- _ _ / _ **1** DALI-2
 - _ _ / _ **3** 1-10V
 - _ _ / _ **Z** _ **30** Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

1 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging


1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

Notes

Central canopy with module LED inclined 30°



5989



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 2560 lm
- /3** _ 3500 K - 3360 lm
- E** >
- CRI >90

Control

- 5989** _ _ / _ _
-
- _ _ / _ **1** DALI-2
 - _ _ / _ **3** 1-10V
 - _ _ / _ **Z** _ **30** Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging


1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6 Kg

Notes

Central canopy with module LED inclined 30°



5991



- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **23/** _ _ Warm White
(NCS S 0502-Y50R)
 - **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3840 lm
/3 _ 3500 K - 5040 lm

E >

CRI >90

Control

5991 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** _ **30** Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging

1 Box 3,3 x 0,1 x 0,1 m
Vol 0,033 m³
Gross weight 6,9 Kg Net weight 3,6 Kg

Notes

Central canopy with module LED inclined 30°

LED IP44 CE ENEC ENEC Dimmer



Vertical Wall



5993


6,6 x 4,7 x 132 cm



5995

6,6 x 4,7 x 212 cm

5993



Finishes

- **11/** __ Black (NCS S 8500-N)
- **23/** __ Warm White (NCS S 0502-Y50R)
- **25/** __ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

- /1_ 2700 K - 1560 lm
- /3_ 3500 K - 1920 lm
- E
- CRI >90

Control

- 5993** __ / __
- __ / _1 DALI-2
 - __ / _3 1-10V
 - __ / _Z _30 Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics


1 x LED STRIP 10,8W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg



5995



Finishes

- **11/** __ Black (NCS S 8500-N)
- **23/** __ Warm White (NCS S 0502-Y50R)
- **25/** __ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

- /1_ 2700 K - 2560 lm
- /3_ 3500 K - 3360 lm
- E
- CRI >90

Control

- 5995** __ / __
- __ / _1 DALI-2
 - __ / _3 1-10V
 - __ / _Z _30 Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6 Kg



Suite

Design by Jordi Vilardell & Meritxell Vidal

Reinterprets and updates the traditional combination of side table or shelf with table lamp. Its warm and comfortable lighting effect appears when least expected, a pleasant luminous surprise.

Floor Table



6006

46 x 46 x 133 cm



6007

46 x 46 x 133 cm



6011


46 x 39 x 97 cm



6012

46 x 39 x 112 cm

6006



Finishes

- **14/ _ _ Chocolate**
(RAL 8019)
- **23/ _ _ Warm White**
(NCS S 0502-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.

Light Source and electronics

8 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220-240V 50Hz

LED Colour Temperature

/1 _ 2700 K - 1539 lm
F 
CRI >90

Control

6006 _ _ /15 Push
(with or without memory)

Packaging


1 Box 0,730 x 0,535 x 1,385 m
Vol 0,4513 m³
Gross weight 34,3 Kg Net weight 16,7 Kg

Notes

Glass diffuser mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m.

6007



- Finishes**
- 14/ __ Chocolate (RAL 8019)
 - 23/ __ Warm White (NCS S 0502-Y50R)

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

Materials
 Shelf: Aluminum.
 Diffuser: PC- Polycarbonate.
 Vertical tube: Steel.
 Base: Steel.
 Lid: ABS with fiberglass.

Light Source and electronics
 8 x LED STRIP 24V 1,63 W.
 1 x LED 4,5 W 350 mA
 Constant Current / Constant Voltage 350 24V
 220~240V 50Hz

LED Colour Temperature
 /1 _ 2700 K - 1539 lm

 CRI >90


Control
 6007 __ /15 Push
 (with or without memory)

Packaging
 1 Box 0,730 x 0,535 x 1,385 m
 Vol 0,4513 m³
 Gross weight 34,3 Kg Net weight 17 Kg

Notes
 Reading light mink (Pantone 407C), mounted on shelf with dimmable light.
 USB charging connection.
 LED On/ Off switch under the shelf.
 Electric cable 2,5 m.



6011



- Finishes**
- 14/ __ Chocolate (RAL 8019)
 - 23/ __ Warm White (NCS S 0502-Y50R)

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

Materials
 Shelf: Aluminum.
 Diffuser: PC- Polycarbonate.
 Vertical tube: Steel.
 Base: Steel.
 Lid: ABS with fiberglass.

Light Source and electronics
 6 x LED STRIP 24V 1,63 W.
 1 x LED 4,5 W 350 mA
 Constant Current / Constant Voltage 350 24V
 220~240V 50Hz

LED Colour Temperature
 /1 _ 2700 K - 790 lm

 CRI >90


Control
 6011 __ /15 Push
 (with or without memory)

Packaging
 1 Box 0,730 x 0,535 x 1,385 m
 Vol 0,3623 m³
 Gross weight 32,4 Kg Net weight 15,7 Kg

Notes
 Glass diffuser mounted on shelf with dimmable light.
 USB charging connection.
 LED On/ Off switch under the shelf.
 Electric cable 2,5 m



6012



- Finishes**
- 14/ __ Chocolate (RAL 8019)
 - 23/ __ Warm White (NCS S 0502-Y50R)

Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

Materials
 Shelf: Aluminum.
 Diffuser: PC- Polycarbonate.
 Vertical tube: Steel.
 Base: Steel.
 Lid: ABS with fiberglass.

Light Source and electronics
 6 x LED STRIP 24V 1,63 W.
 1 x LED 4,5 W 350 mA
 Constant Current / Constant Voltage 350 24V
 220~240V 50Hz

LED Colour Temperature
 /1 _ 2700 K - 1275 lm

 CRI >90

Control
 6012 __ /15 Push
 (with or without memory)

Packaging
 1 Box 0,730 x 0,535 x 1,385 m
 Vol 0,3623 m³
 Gross weight 33,6 Kg Net weight 16 Kg

Notes
 Reading light mink (Pantone 407C), mounted on shelf with dimmable light.
 USB charging connection.
 LED On/ Off switch under the shelf.
 Electric cable 2,5 m



Wall



6040

32 x 14 x 16 cm



6041

32 x 14 x 16 cm



6045


32 x 29 x 16 cm



6046

32 x 29 x 16 cm

6040



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

Materials

Shelf: Aluminum.
Diffuser: Blown-glass.
Lid: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
220-240V 50Hz

LED Colour Temperature


- /1 _ 2700 K - 485 lm
- E
- CRI >90
- /3 _ 3500 K - 184 lm
- F
- CRI >80

Control


6040 _ / _ 0 On/ Off

Packaging

1 Box 0,21 x 0,48 x 0,21 m
Vol 0,0212 m³
Gross weight 2,6 Kg Net weight 1,6 Kg



6041



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

Materials

Shelf: Aluminum.
Diffuser: Blown-glass.
Lid: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

LED Colour Temperature

- /1 _ 2700 K - 485 lm
- E
- CRI >90
- /3 _ 3500 K - 184 lm
- F
- CRI >80

Control


6041 _ / _ 0 On/ Off

Packaging

1 Box 0,21 x 0,48 x 0,21 m
Vol 0,0212 m³
Gross weight 2,6 Kg Net weight 1,6 Kg



6045



Finishes
 ● **14/** __ Chocolate (RAL 8019)
 ● **23/** __ Warm White (NCS S 0502-Y50R)
Finish customization
 (Available options: Vibia colour palette.)
 Minimum quantity 10 units. Price + 10%

LED Colour Temperature
 /1_ 2700 K - 616 lm
 E
 CRI >90
 /3_ 3500 K - 184 lm
 F
 CRI >80


Control
6045 __ / __ 0 On/ Off

Materials
 Shelf: Aluminum.
 Diffuser: PC- Polycarbonate.
 Lid: Steel.


Packaging
 1 Box 0,29 x 0,38 x 0,38 m
 Vol 0,418 m³
 Gross weight 2,6 Kg Net weight 1,8 Kg

Light Source and electronics
 1 x LED STRIP 24V 1,63W.
 1 x LED 4,5W 350mA.
 Constant Current / Constant Voltage 350 24V
 220-240V 50Hz

Notes
 Reading light mink (Pantone 407C), mounted on shelf with dimmable light.



6046



Finishes
 ● **14/** __ Chocolate (RAL 8019)
 ● **23/** __ Warm White (NCS S 0502-Y50R)
Finish customization
 (Available options: Vibia colour palette.)
 Minimum quantity 10 units. Price + 10%

LED Colour Temperature
 /1_ 2700 K - 616 lm
 E
 CRI >90
 /3_ 3500 K - 184 lm
 F
 CRI >80

Control
6046 __ / __ 0 On/ Off

Materials
 Shelf: Aluminum.
 Diffuser: PC- Polycarbonate.
 Lid: Steel.

Packaging
 1 Box 0,29 x 0,38 x 0,38 m
 Vol 0,418 m³
 Gross weight 2,6 Kg Net weight 1,8 Kg

Light Source and electronics
 1 x LED STRIP 24V 1,63W.
 1 x LED 4,5W 350mA.
 Constant Current / Constant Voltage 350 24V
 220-240V 50Hz

Notes
 Reading light mink (Pantone 407C), mounted on shelf with dimmable light.




Wall



6050
 12 x 12 x 10 cm

6050



Finishes
 ● **23/** __ Warm White (NCS S 0502-Y50R)

LED Colour Temperature
 /1_ 2700 K - 485 lm
 E
 CRI >90

Control
6050 23 / 10 On/ Off

Materials
 Wall support: Aluminum.
 Diffuser: Blown-glass

Packaging
 1 Box 0,13 x 0,20 x 0,21 m
 Vol 0,00055 m³
 Gross weight 0,6 Kg Net weight 0,4 Kg

Light Source and electronics
 1 x LED 4,5W 350 mA
 Constant Current 350 mA
 100-240V 50/60Hz



Tube Free

Design by Ichiro Iwasaki

With the Tube ceiling collection, Ichiro Iwasaki endeavours to create a lighting system capable of forming distinctive expressions by reconfiguring the different constituent parts. By combining three different diameter shades, six colour tones and a rhythm of differing heights, Tube creates a unique landscape of luminaires overhead.

Ceiling

Built-in

6095

Ø 22 cm



6100

Ø 28,5 cm



6105

Ø 41 cm



6095

Finishes

- 15/ __ Grey L2 (NCS S 2500-N)
- 10/ __ White (NCS S 0300-N)
- 16/ __ Grey M1 (NCS S 4500-N)
- 21/ __ Black Grey (NCS S 7000-N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 37/ __ Terra Red (NCS S 4040-Y70R)

Finish customization

(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1 _ 2700 K - 1170 lm
- /2 _ 3000 K - 1251 lm
- /3 _ 3500 K - 1251 lm




CRI >90

Control

6095 __ / __

- __ / _ A _ 32 Push; 1-10V;
DALI-2 (Remote)
- __ / _ Z _ 32 Casambi (Remote)



Materials

Diffuser: PC- Polycarbonate.
Led support: Aluminum.
Shade: Aluminum.
Canopy: ABS.

Light Source and electronics


2700 K - 3000 K - 3500K:
1 x LED 10,5 W 15 V
Constant Current 700 mA
110-240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,017576 m³
Gross weight 1,6 Kg Net weight 0,8 Kg



6100



- Finishes**
- 15/ __ Grey L2 (NCS S 2500-N)
 - 10/ __ White (NCS S 0300-N)
 - 16/ __ Grey M1 (NCS S 4500-N)
 - 21/ __ Black Grey (NCS S 7000-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
- Finish customization**
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1 2700 K - 1476 lm
 - /2 3000 K - 1521 lm
 - /3 3500 K - 1550 lm
- CRI >90

- Control**
- 6100 __ / __ A Push; 1-10V;
 DALI-2

Materials

Diffuser: PC- Polycarbonate.
 Led support: Aluminum.
 Shade: Aluminum.
 Canopy: Steel.


Light Source and electronics
 2700 K - 3000 K - 3500K:
 1 x LED PLATE 13,5 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging

1 Box 0,40 x 0,40 x 0,35 m
 Vol 0,056 m³
 Gross weight 4,5 Kg Net weight 2,5 Kg



6105



- Finishes**
- 15/ __ Grey L2 (NCS S 2500-N)
 - 10/ __ White (NCS S 0300-N)
 - 16/ __ Grey M1 (NCS S 4500-N)
 - 21/ __ Black Grey (NCS S 7000-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
- Finish customization**
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1 2700 K - 2413 lm
 - /2 3000 K - 2485 lm
 - /3 3500 K - 2533 lm
- CRI >90

- Control**
- 6105 __ / __ A Push; 1-10V;
 DALI-2

Materials

Diffuser: PC- Polycarbonate.
 Led support: Aluminum.
 Shade: Aluminum.
 Canopy: Steel.

Light Source and electronics
 2700 K - 3000 K - 3500K:
 1 x LED PLATE 20 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,40 m
 Vol 0,144 m³
 Gross weight 5,5 Kg Net weight 3,5 Kg



Pendant

INDIVIDUAL MODEL




6160
Ø 22 cm




6165
Ø 28,5 cm

MULTIPLE MODELS



INDIVIDUAL MODEL

6160



Finishes

- 10/ __ White (NCS S 0300-N)
- 15/ __ Grey L2 (NCS S 2500-N)
- 16/ __ Grey M1 (NCS S 4500-N)
- 21/ __ Black Grey (NCS S 7000-N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 37/ __ Terra Red (NCS S 4040-Y70R)

Finish customization

(Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

- /1_ 2700 K - 1170 lm
- /2_ 3000 K - 1251 lm
- /3_ 3500 K - 1251 lm



CRI >90

Control

6160 __ / __

- __ / _1 DALI-2
- __ / _B Push; 1-10V
- __ / _Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum. Led support: Aluminum. Tube: Steel. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 10,5 W 15 V
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging


Total Vol 0,04 m3
 Gross weight 4,40 Kg Net weight 2,15 Kg

Notes

6160 __ / _1: DALI-2 **Bi-volt**
 6160 __ / _B: Push; 1-10V **Bi-volt**
 Extra cable length.



6165



Finishes

- 10/ __ White (NCS S 0300-N)
- 15/ __ Grey L2 (NCS S 2500-N)
- 16/ __ Grey M1 (NCS S 4500-N)
- 21/ __ Black Grey (NCS S 7000-N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 37/ __ Terra Red (NCS S 4040-Y70R)

Finish customization

(Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

- /1_ 2700 K - 1170 lm
- /2_ 3000 K - 1251 lm
- /3_ 3500 K - 1251 lm



CRI >90

Control

6165 __ / __

- __ / _1 DALI-2
- __ / _B Push; 1-10V
- __ / _Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum. Led support: Aluminum. Tube: Steel. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 10,5 W 15 V
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging

Total Vol 0,04 m3
 Gross weight 4,40 Kg Net weight 2,15 Kg

Notes


6165 __ / _1: DALI-2 **Bi-volt**
 6165 __ / _B: Push; 1-10V **Bi-volt**
 Extra cable length.



Tube Free

MULTIPLE MODELS

Select your model at vibia.com and adjust

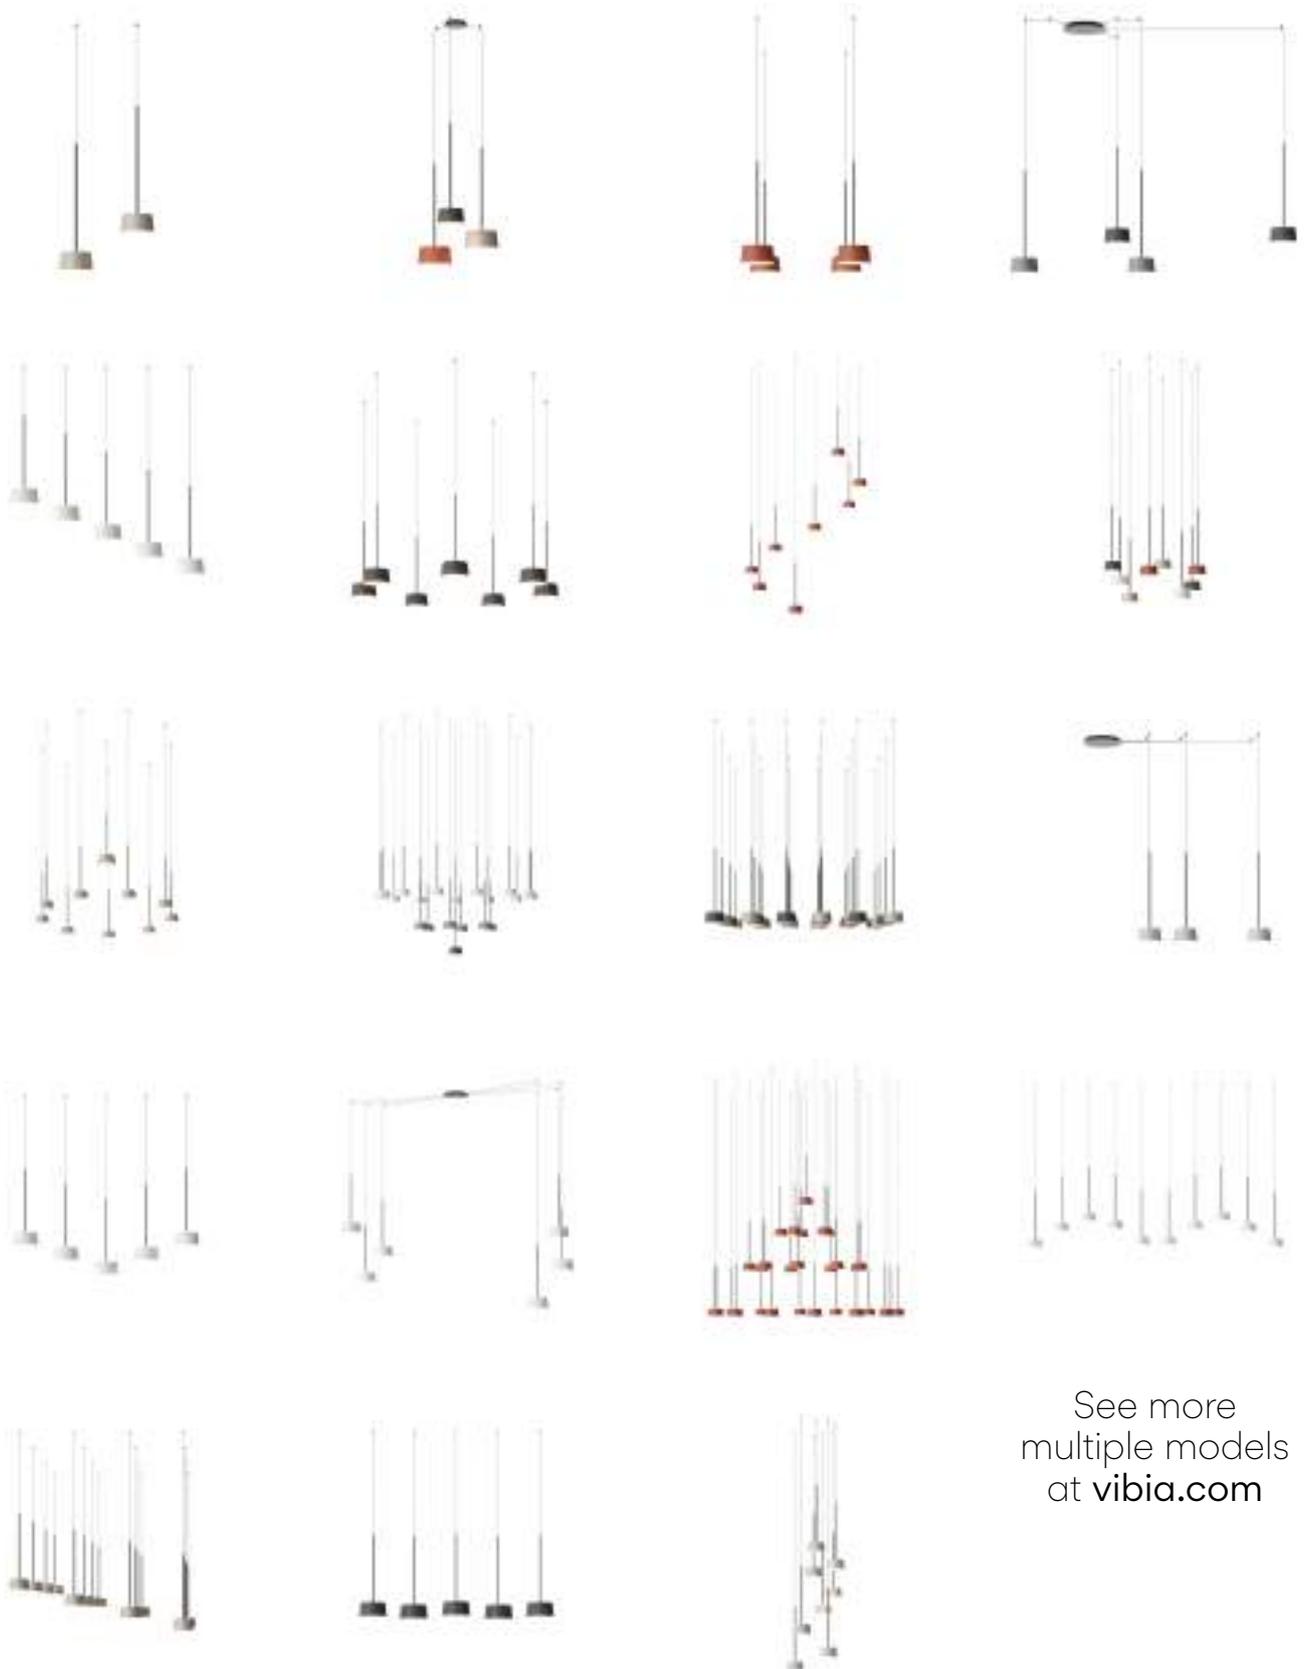

See more
multiple models
at vibia.com

- Finishes**
- **10/** __ White
(NCS S 0300-N)
 - **15/** __ Grey L2
(NCS S 2500-N)
 - **16/** __ Grey M1
(NCS S 4500-N)
 - **21/** __ Black Grey
(NCS S 7000-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)
 - **37/** __ Terra Red
(NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 2700 K
/2 3000 K
/3 3500 K
CRI >90

Control
Model __ / __
____ / __ 1 DALI-2
____ / __ B Push; 1-10V
____ / __ Z Casambi


Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 6160, 6165

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
--	---	--

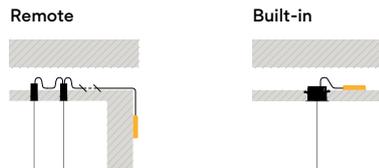

Regular ceiling

<p>_10 Surface</p>  <p>Ø 16,8 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 - 3 wires</p> <p>Ø 22 cmv</p>	 <p>4 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
---	---	--	--	--

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Materials
Diffuser: PC- Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Notes
Additional cable length from 2 m.



Plusminus

Design by Diez Office

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level.

The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.





Easy to design and install

Compose a personalised Plusminus at vibia.com

From scratch




- + Create and compose projects in detail.
- + Draw and customise in 3D to see it in space.
- + Or customise it step by step without drawing.

From a layout



- + Customise and adapt it to the needs of your project.
- + Add it to your project and edit it at any time.
- + More than 100 creations for you.

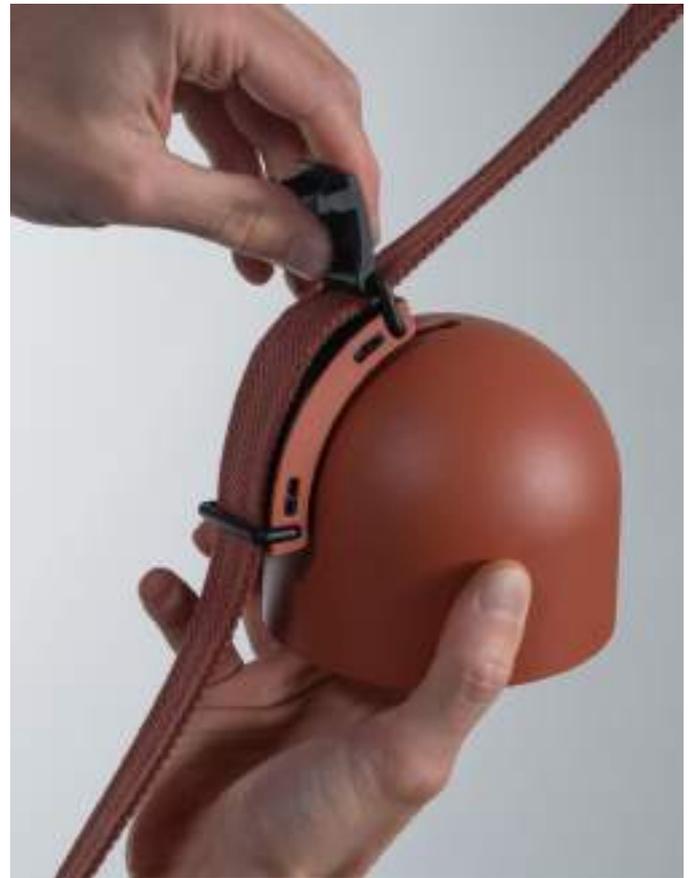


Easy connection Fix / Click / Connect

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.

Luminaire types and lighting effects



Sphere



Volumetric Diffuser

distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere. The light sphere bathes all surfaces of the space, producing a peaceful, richer and extremely homogenous ambience.



Semisphere



Hidden Diffuser

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.



Cone



Hidden Diffuser


emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.

Spotlight



Flat diffuser

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. It is ideal for reading situations or when the light output is visible, as it does not produce glare.



Accent light

emphasizes objects or architectural elements with intensive cones of light. Luminance contrasts attract the eye and bring the illuminated objects into the foreground. The light output is directed towards the object or architectural element and not towards the person, in order to avoid glare.



Linear Diffuser



General lighting

provides a high degree of uniformity on the horizontal plane and generates a first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in which the space and its component elements do not display visual hierarchies.



Linear Low UGR



Linear High Efficiency Low Glare

offers medium brightness and clarity of forms. Direct illumination, extended beam and luminaire performance enable installations with high-energy efficiencies and low-glare levels below UGR<19.

Linear High Comfort Low Glare

provides high levels of illumination and comfort with UGR levels below 19. It is also ideal for work or meeting areas.



Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

Sphere




6230
Ø 20 cm



6235
Ø 30 cm

6230



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 _ 2700 K - 846 lm
 - /2 _ 3000 K - 884 lm
 - /3 _ 3500 K - 916 lm
- E** >90

- Control**
- 6230** _ _ / _ _
-
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
 - _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)


Materials
Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,26 x 0,26 x 0,260 m
Vol 0,0175 m³
Gross weight 1,56 Kg Net weight 0,93 Kg

LED IP20 CE UK ENEC Dimmer

6235



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 _ 2700 K - 1492 lm
 - /2 _ 3000 K - 1569 lm
 - /3 _ 3500 K - 1606 lm
- F** >90

- Control**
- 6235** _ _ / _ _
-
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
 - _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging
1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,50 Kg Net weight 1,80 Kg

LED IP20 CE UK ENEC Dimmer

Semisphere




6220
Ø 20 cm



6225
Ø 30 cm

6220



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 846 lm
 - /2** _ 3000 K - 884 lm
 - /3** _ 3500 K - 916 lm
- E** >
- CRI >90

Control

6220 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,20 Kg Net weight 0,78 Kg

LED IP20 CE ENEC ETL Dimmer

6225



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 1492 lm
 - /2** _ 3000 K - 1569 lm
 - /3** _ 3500 K - 1606 lm
- F** >
- CRI >90

Control

6225 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging

1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2 Kg Net weight 1,5 Kg

LED IP20 CE ENEC ETL Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

Cone




6240
Ø 60 cm



6245
Ø 80 cm

6240



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 1492 lm
 - /2** _ 3000 K - 1569 lm
 - /3** _ 3500 K - 1606 lm
- F** >
- CRI >90

- Control**
- 6240** _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.


Light Source and electronics
1 x LED 16 W 850 mA

Packaging

0,727 x 0,727 x 0,32 m
Vol 0,1691 m³
Gross weight 5 Kg Net weight 2,5 Kg



6245



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 1492 lm
 - /2** _ 3000 K - 1569 lm
 - /3** _ 3500 K - 1606 lm
- F** >
- CRI >90

- Control**
- 6245** _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,2488 m³
Gross weight 7 Kg Net weight 3,5 Kg



Spotlight



Spot Accent Light
6200 Narrow
Ø 10 cm




Spot Accent Light
6205 Medium
6210 Wide
Ø 10 cm



Spot Flat Diffuser
6215
Ø 10 cm

6200 Narrow



- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **42/** __ Blue M1 (NCS S 5010-B10G)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 846 lm
- /2** _ 3000 K - 884 lm
- /3** _ 3500 K - 916 lm

E >

CRI >90

Control

6200 __ / __

- __ / __ **O** On/Off
- __ / __ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- __ / __ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 CE UK ENE Dimmer

6205 Medium



- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **42/** __ Blue M1 (NCS S 5010-B10G)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 846 lm
- /2** _ 3000 K - 884 lm
- /3** _ 3500 K - 916 lm

E >

CRI >90

Control

6205 __ / __

- __ / __ **O** On/Off
- __ / __ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- __ / __ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg


LED IP20 CE UK ENE Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

6210

Wide



- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **42/** __ Blue M1 (NCS S 5010-B10G)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1_ 2700 K - 846 lm
 - /2_ 3000 K - 884 lm
 - /3_ 3500 K - 916 lm
- LED symbol:
- CRI >90

Control
6210 __ / __

- __ / **0** On/Off
- __ / **F** Simultaneous line Push; 1-10V; Casambi; DALI
- __ / **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg



6215

Flat Diffuser



- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **42/** __ Blue M1 (NCS S 5010-B10G)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1_ 2700 K - 491 lm
 - /2_ 3000 K - 513 lm
 - /3_ 3500 K - 532 lm
- LED symbol:
- CRI >90

Control
6215 __ / __

- __ / **0** On/Off
- __ / **F** Simultaneous line Push; 1-10V; Casambi; DALI
- __ / **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,2 W 250 mA

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg



Spotlight - Accent

Narrow

Medium


Wide



Beam Angle	H = 1,5 m	H = 3 m
∅ 0,2 m	1240 lx	310 lx
∅ 0,69 m	851 lx	213 lx
∅ 0,9 m	307 lx	77 lx

Spot Accent Light


Spot Flat Diffuser

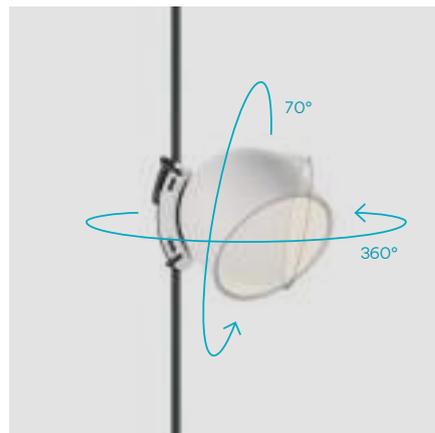

Linear diffuser



6250



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 2544 lm
 - /2** _ 3000 K - 2628 lm
 - /3** _ 3500 K - 2712 lm
- ☐ C >
- CRI >90

Control

- 6250** _ _ / _ _
-
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
 - _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,06 x 0,06 x 1,25 m
Vol 0,0057 m³
Gross weight 1,5 Kg Net weight 0,72 Kg

LED IP20 CE UK ENE Dimmer

6255



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 5088 lm
 - /2** _ 3000 K - 5256 lm
 - /3** _ 3500 K - 5424 lm
- ☐ D >
- CRI >90

Control

- 6255** _ _ / _ _
-
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
 - _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 41,3 W 24 V

Packaging

1 Box 0,06 x 0,06 x 2,24 m
Vol 0,0103 m³
Gross weight 2 Kg Net weight 1,45 Kg

LED IP20 CE UK ENE Dimmer

Linear Low UGR - High-Comfort



6260

26,8 x 7 x 3 cm




6265

52,5 x 7 x 3 cm




6270

103,7 x 7 x 3 cm



6260



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 1281 lm
- /2** _ 3000 K - 1323 lm
- /3** _ 3500 K - 1366 lm

D >

CRI >90

Control

6260 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m³
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19



6265



- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)
 - **37/** __ Terra Red
(NCS S 4040-Y70R)
 - **42/** __ Blue M1
(NCS S 5010-B10G)
 - **53/** __ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 2562 lm
 - /2** _ 3000 K - 2647 lm
 - /3** _ 3500 K - 2731 lm
- CRI >90**

Control

6265 __ / __

- __ / **O** On/Off
- __ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- __ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19



6270



- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)
 - **37/** __ Terra Red
(NCS S 4040-Y70R)
 - **42/** __ Blue M1
(NCS S 5010-B10G)
 - **53/** __ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 5124 lm
 - /2** _ 3000 K - 5293 lm
 - /3** _ 3500 K - 5462 lm
- CRI >90**

Control

6270 __ / __

- __ / **O** On/Off
- __ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- __ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics
1 x LED STRIP 41,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 1,10 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19



Linear Low UGR - High-Efficiency



6275
26,8 x 7 x 3 cm




6280
52,5 x 7 x 3 cm



6285
103,7 x 7 x 3 cm



6275



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1_ 2700 K - 1281 lm
 - /2_ 3000 K - 1323 lm
 - /3_ 3500 K - 1366 lm
- D** >90


- Control**
- 6275** _ _ / _ _
-
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
 - _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Shade: Aluminum.


Light Source and electronics
1 x LED STRIP 10,3 W 24 V

Packaging
1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m³
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes
UGR <19



6280



- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)
 - **37/** __ Terra Red
(NCS S 4040-Y70R)
 - **42/** __ Blue M1
(NCS S 5010-B10G)
 - **53/** __ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 2562 lm
 - /2** _ 3000 K - 2647 lm
 - /3** _ 3500 K - 2731 lm
- LED** **CRI >90**

Control

6280 __ / __

- __ / **O** On/Off
- __ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- __ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19



6285



- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)
 - **37/** __ Terra Red
(NCS S 4040-Y70R)
 - **42/** __ Blue M1
(NCS S 5010-B10G)
 - **53/** __ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 5124 lm
 - /2** _ 3000 K - 5293 lm
 - /3** _ 3500 K - 5462 lm
- LED** **CRI >90**

Control

6285 __ / __

- __ / **O** On/Off
- __ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- __ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics
1 x LED STRIP 41,3 W 24V

Packaging

1 Box 0,08 x 0,11 x 1,102 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19



Accessories Toolbox

Thought out to the smallest detail.
Receive your personalised accessories
toolbox for a quick and easy installation.




Installation accessories

You will receive a personalised accessories toolbox per every composition made at **vibia.com**. The Toolbox includes some extra units for on-site adjustments.




Belt terminations options



B3
Belt End Cap



B4
Double End Cap




B5
Pendant End Cap

Fasten accessories options



F1
Circular Ratchet




F2
Circular Anchor



F3
Belt Support



F4
Counterweight



F5
Corner Support




F6
Freestyle Bar
2 m. bar length
5 m. maximum tensor cable

Tension clips options




T1
Suspension Clip



T2
V-Tension Clip



T3
Parallel Tension Clip S



T4
Parallel Tension Clip M



T5
Cable End Cap



T6
Pendant Cable S



T7
Pendant Cable M

Materials

Counterweight: Cast iron

Finishes

11 Black (NCS S 0300-N)

Electrical connection options

Choose your preferred installation option according to your needs.



Dimming control options

Choose your preferred installation option according to your needs.


Dimming Control	Electrical Connection			
	Surface 25 - 240 W	Built-in 25 - 240 W	Remote 25 - 240 W	Plug Max 60W
On/ Off	✓	✓	✓	✓
Push Switch	—	—	—	✓
Push Simultaneous	✓	✓	✓	—
1-10V Simultaneous	✓	✓	✓	—
DALI Simultaneous	✓	✓	✓	—
Casambi Simultaneous	✓	✓	✓	✓
Casambi integrated on each individual luminaire (P2P)	✓	✓	✓	✓
ProtoPixel Simultaneous	✓	✓	✓	✓
ProtoPixel integrated on each individual luminaire (P2P)	✓	✓	✓	✓

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Belt Options Surface Canopy

Choose your preferred installation option according to your needs.






Surface Canopy S
E1 Ø 205 mm.
Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 0,9 Kg.

11 Black
(NCS S 8500-N)




Surface Canopy M
E2 Ø 260 mm.
Wattage options:
>60W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 1,8 Kg.

11 Black
(NCS S 8500-N)




Built-in Canopy
E3 Ø 120 mm.
Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 1,08 - 1,860 Kg.

11 Black
(NCS S 8500-N)




Remote Built-in Canopy
E4 Ø 60 mm.
Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 0,87 - 1,65 Kg.

11 Black
(NCS S 8500-N)




Remote Surface Canopy
E5 Ø 60 mm.
Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: Aluminum.
Net weight 0,95 - 1,73 Kg.

11 Black
(NCS S 8500-N)




Plug-in Floor Switch
E6 Ø 90 mm.
Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi; ProtoPixel*.
Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.

11 Black
(NCS S 8500-N)



Wire Connector
E8 Ø 3,1 mm.
Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.

Body: ABS.

11 Black
(NCS S 8500-N)




Wire connector
E8 Ø 5,8 mm.
Wattage options:
< 60W.
<240W.

Belt

Maximum 60 metres per electrical connection, belt length personalised for each composition on www.vibia.com

Finishes	Belt	Fire Hazard Testing. GW-960.
Black Terra Red Blue Green Beige	Polyester	fulfills the requirements of: standards EN 60695-2-10:2013; EN 60695-2-11:2015; EN 60695-2-12:2011 / A1:2014

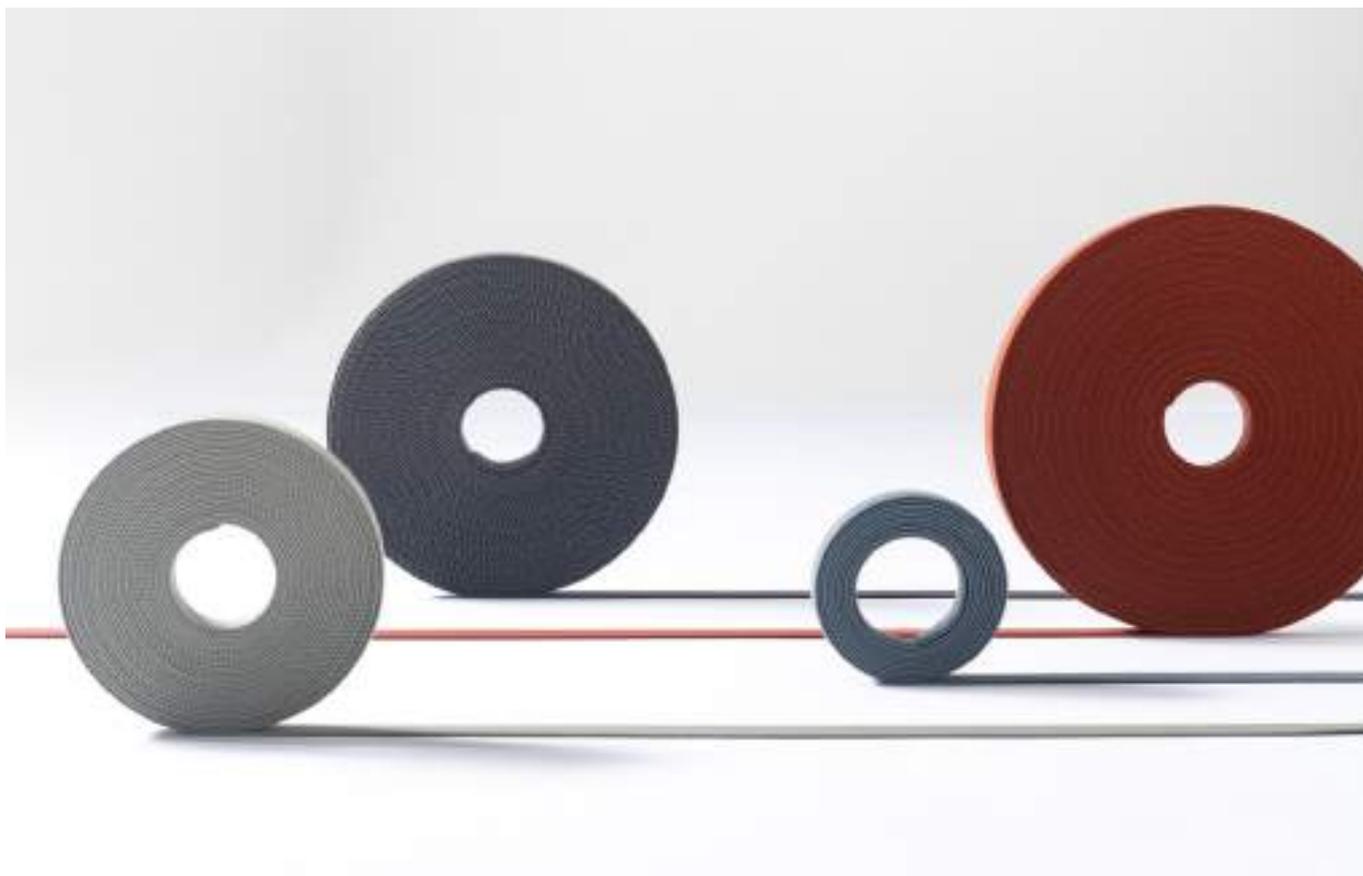

The distance of the belt from the wall or the ceiling, when installed in parallel, is always 4,5 cm.

Belt terminations


Belt terminations can be adjusted during the installation process according to your preference.




Composition examples for orientative prices

The final price of the composition depends on the number of luminaires, belt length, dimming control and the electrical connection type chosen.


Composition examples for orientative prices

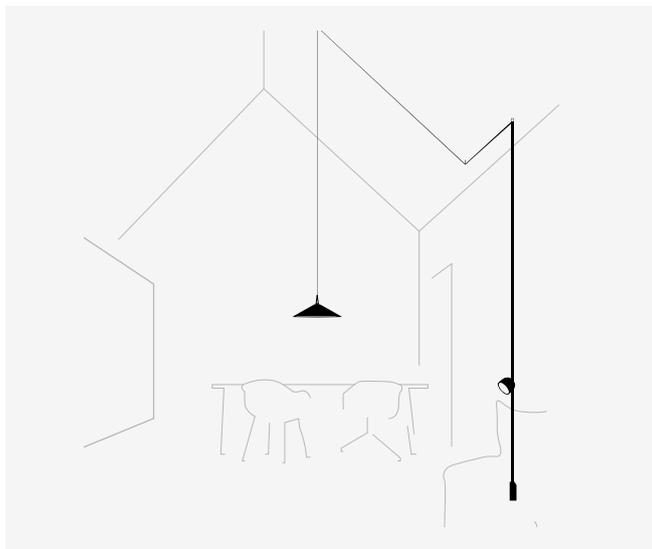


Sketch composed by one composition.
2 luminaires: Cone 6240, Spotlight 6215.

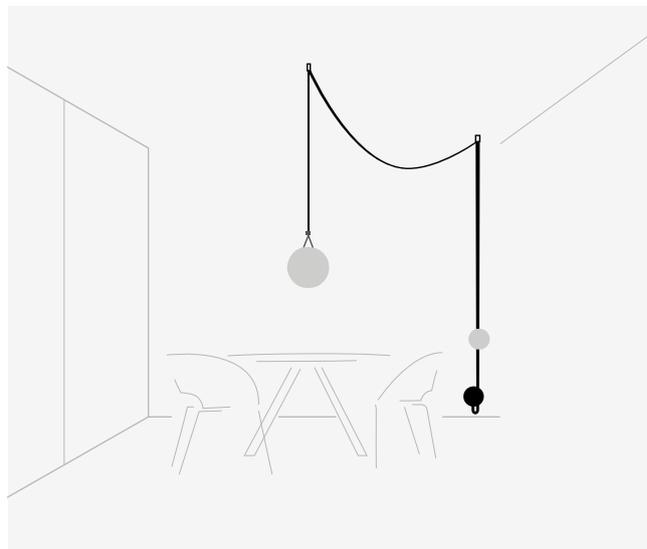

Sketch composed by one composition.
2 luminaires: Sphere 6230, Sphere 6235.

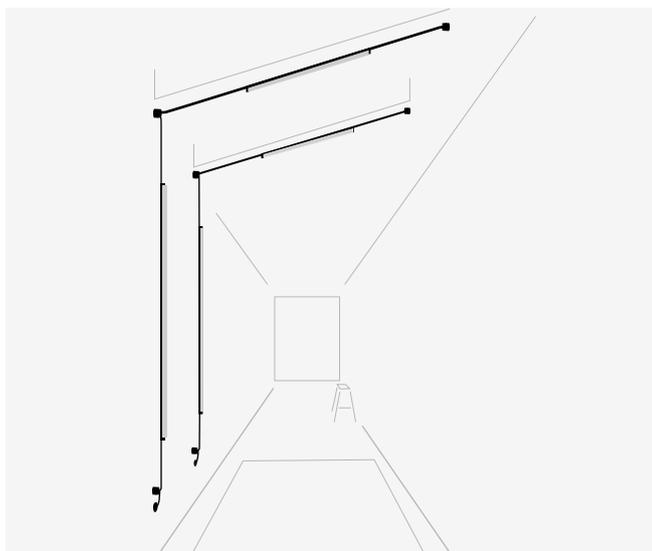

Sketch composed by two identical compositions.
2 luminaires: Linear Diffuser 6250, Linear Diffuser 6255.

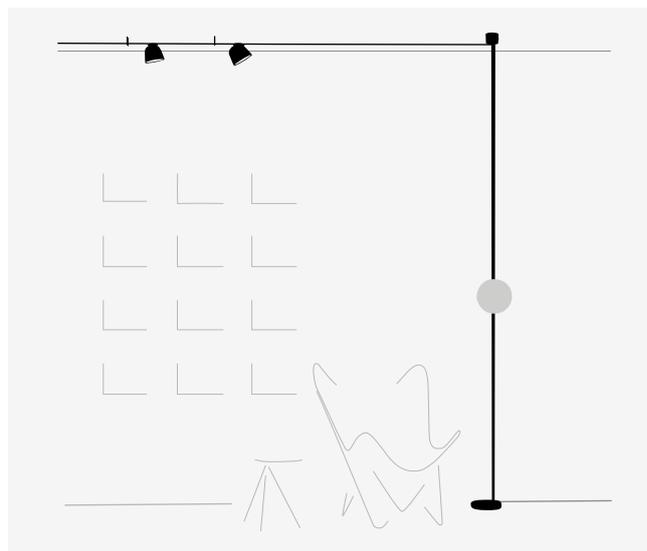


Sketch composed by one composition.
3 luminaires: Spotlight 6205 x 2, Sphere 6230.




Sketch composed by one composition.

1 luminaire: Sphere 6230.

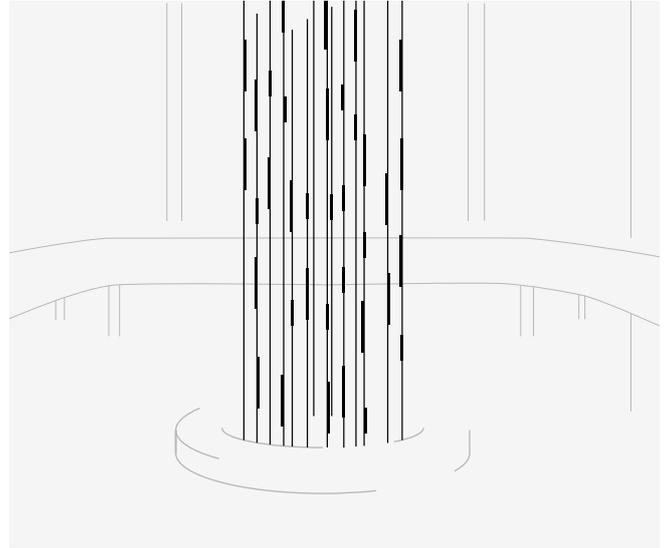


Sketch composed by several compositions.

3 luminaires: Linear Diffuser 6255.

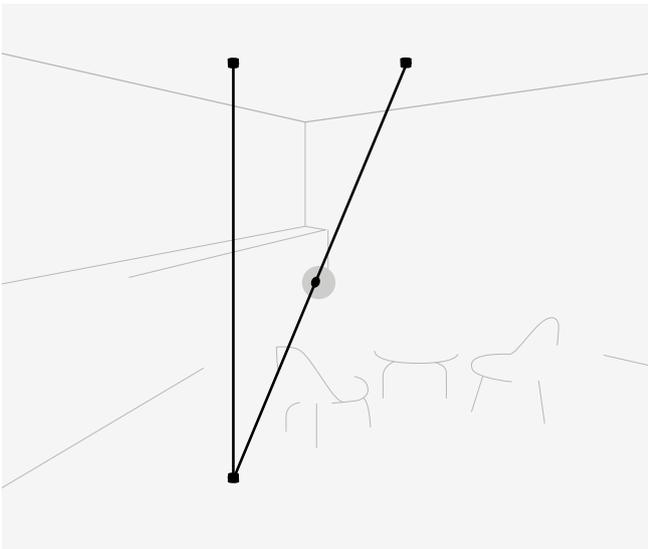

Sketch composed by one composition.


1 luminaire: Sphere 6230.

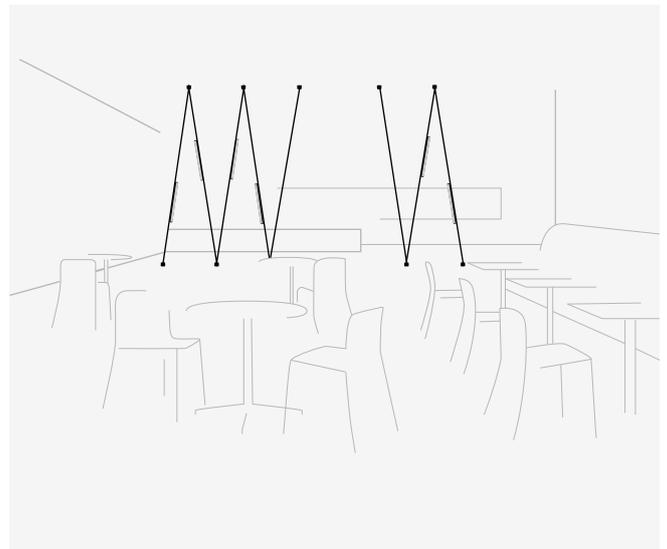

Sketch composed by two compositions.


2 luminaires: Linear Diffuser 6250.

Composition examples for orientative prices

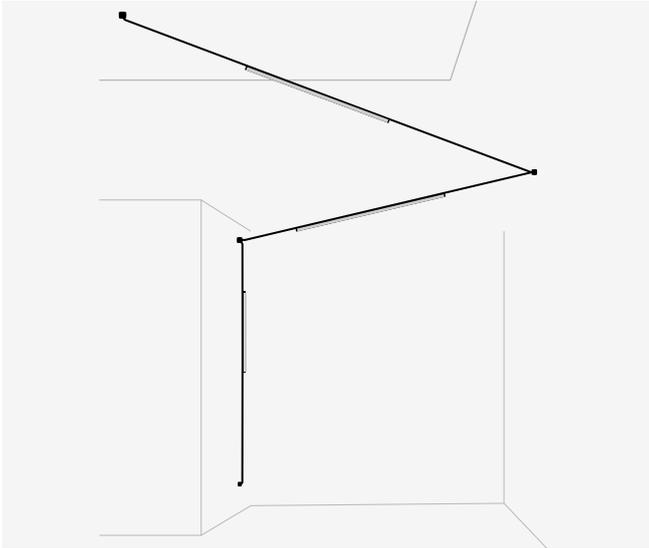


Sketch composed by one composition.

3 luminaires: Linear Diffuser 6250, Linear Diffuser 6255 x 2.

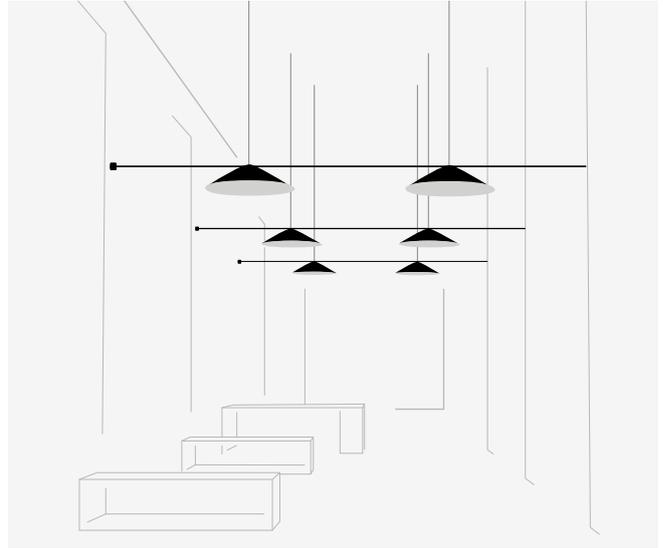


Sketch composed by three identical compositions.

2 luminaires: Cone 6245 x 2.

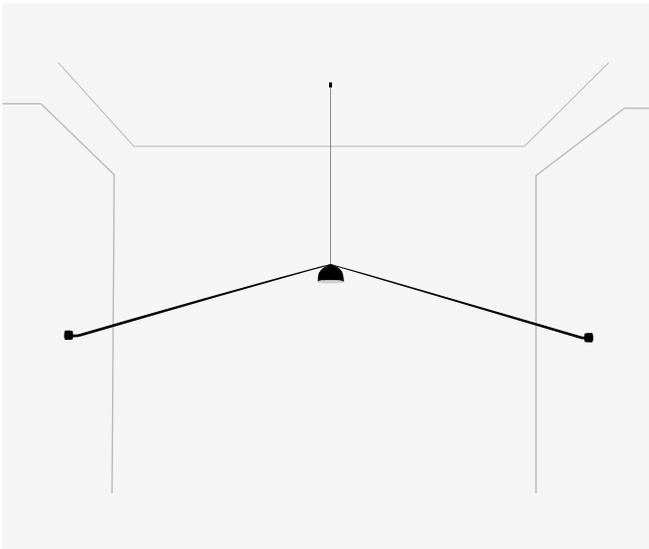


Sketch composed by one composition.

1 luminaire: Semisphere 6225.

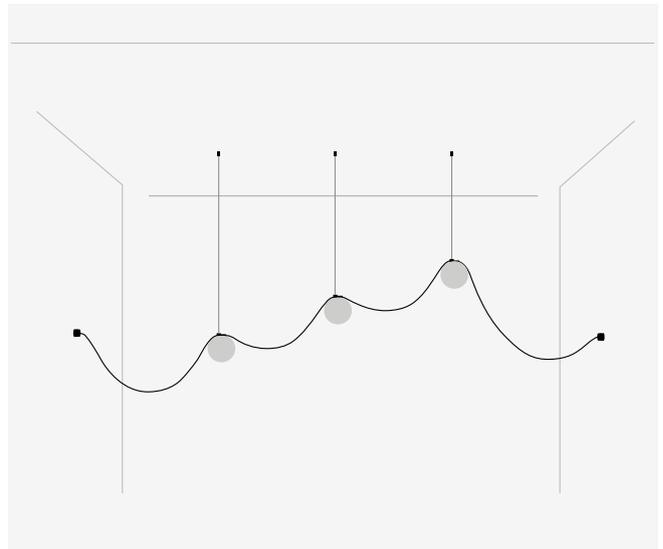


Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.

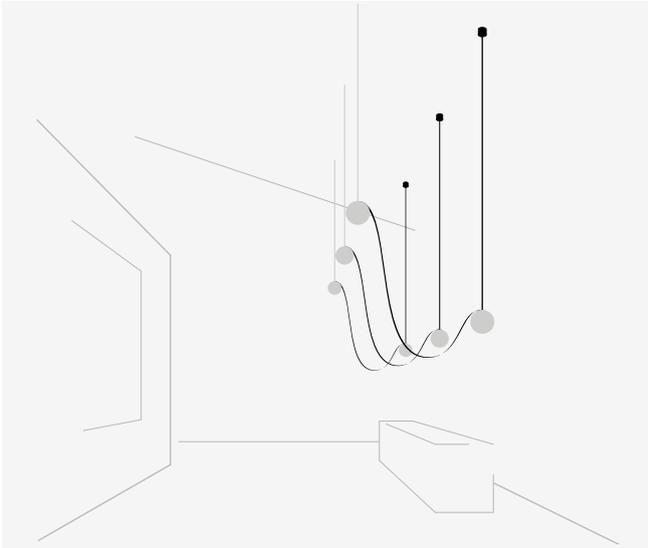


Sketch composed by three identical compositions.

2 luminaires: Sphere 6235 x 2.

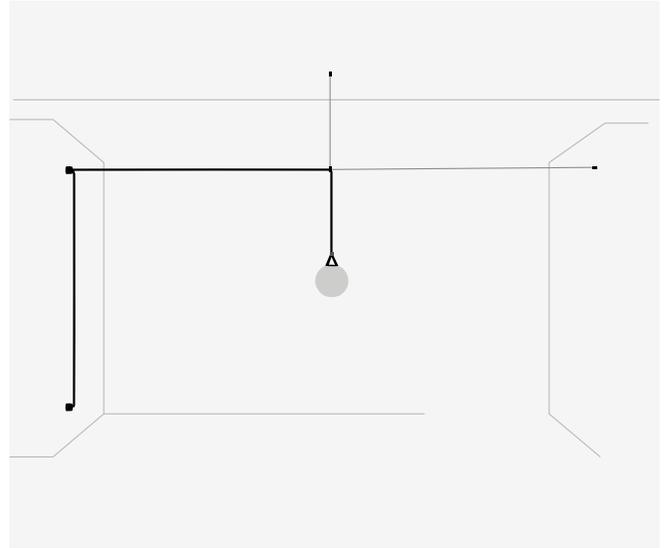


Sketch composed by one composition.

1 luminaire: Sphere 6235.

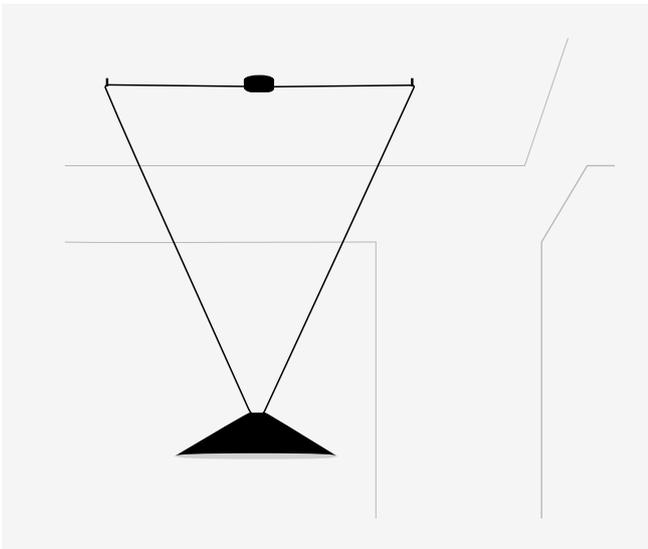

Sketch composed by one composition.


1 luminaire: Cone 6245.

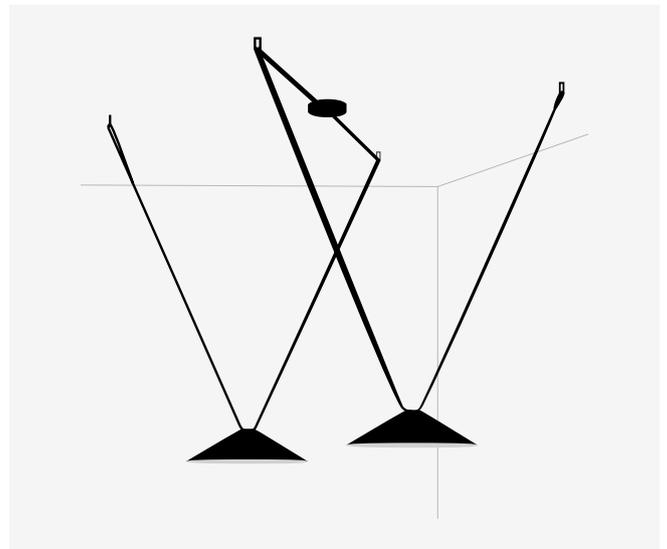

Sketch composed by one composition.

2 luminaires: Cone 6240 x 2.

Composition examples for orientative prices

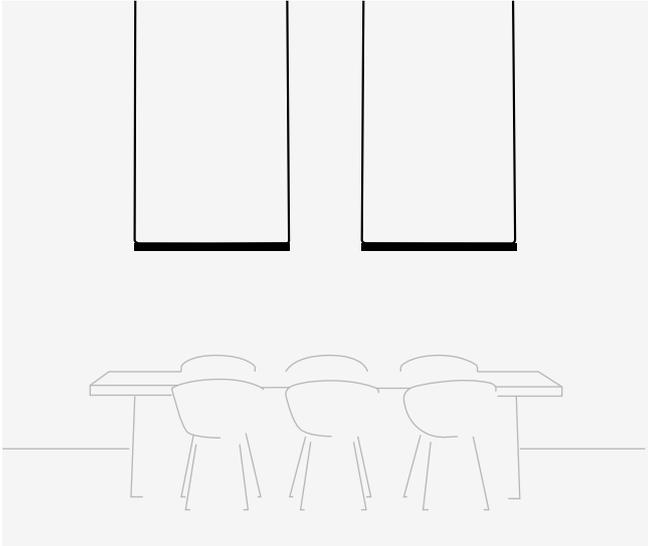


Sketch composed by one composition.

2 luminaires: Linear Low UGR High-Comfort 6270 x 2.




Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

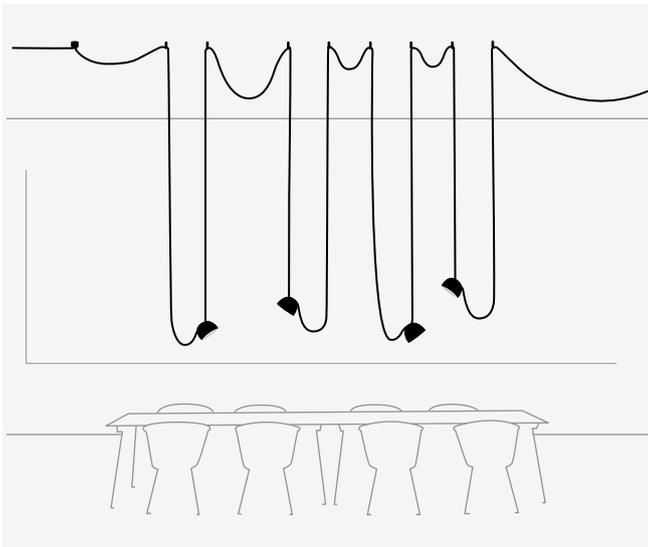


Sketch composed by one composition.

4 luminaires: Semisphere 6220 x 4.

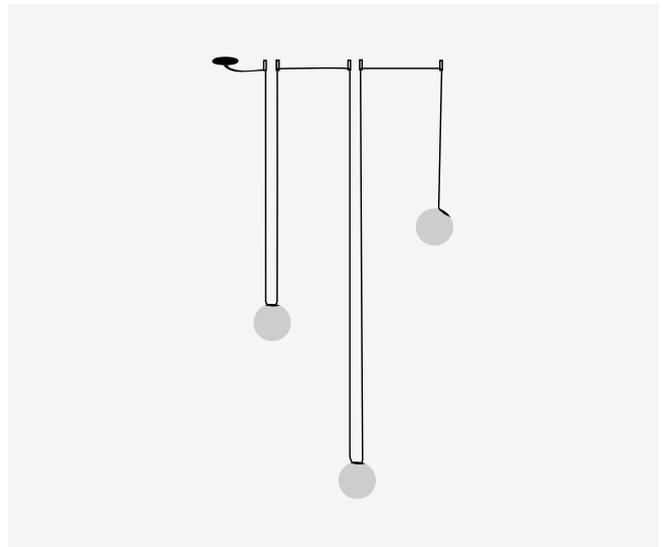


Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.

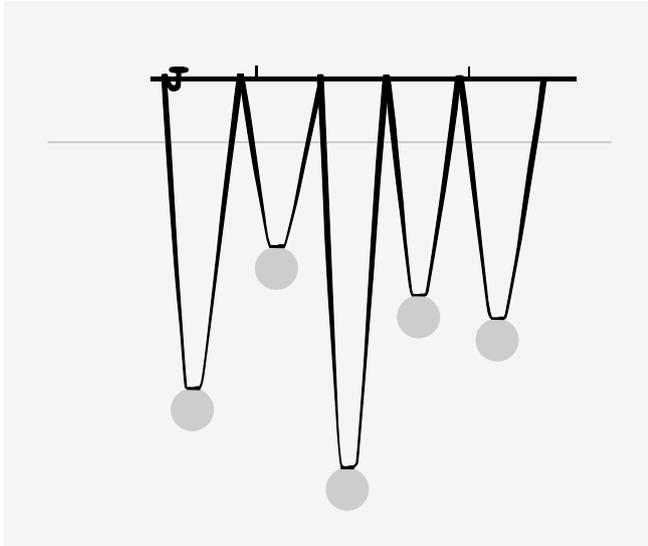

Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

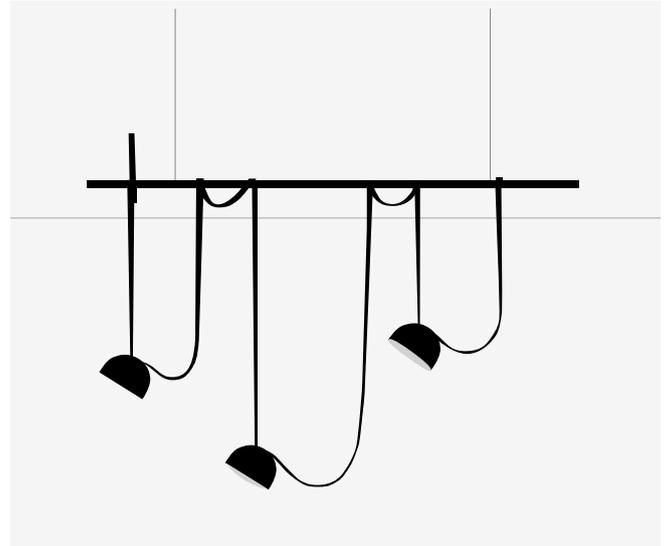

Sketch composed by one composition.

3 luminaires: Semisphere 6220 x 3.

Each project is unique.
Visit vibia.com and chose among
multiple compositions designed
and adapted to your project needs.

Personalise your own Plusminus composition
quick and easy at vibia.com

Plusminus Solo

Design by Diez Office

Plusminus Solo introduces a collection of versatile semi-spherical luminaires that adapt to the surrounding space. Easily adjustable, the Plusminus wall range features semi-spherical directed flat diffusers in different sizes, as well as an accent spotlight for more precise illumination.

Ceiling Wall

Spot Accent Light

6330 Narrow
6331 Medium
6332 Wide
Ø 10 cm



Spot Flat Diffuser

6333
Ø 10 cm



Spot Flat Diffuser

6335
Ø 20 cm



Spot Flat Diffuser

6340
Ø 30 cm



6330
Narrow
6331
Medium
6332
Wide

6330 Narrow

Finishes

- 11/ __ Black (NCS S 8500-N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 37/ __ Terra Red (NCS S 4040-Y70R)
- 42/ __ Blue M1 (NCS S 5010-B10G)
- 53/ __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1_ 2700 K - 916 lm
- /2_ 3000 K - 925 lm
- /3_ 3500 K - 959 lm



CRI >90

Control

6330 __ / __

- __ / __ 0 On/ Off (Remote)
- __ / __ 1 DALI-2 (Remote)
- __ / __ B Push; 1-10V (Remote)
- __ / __ Z Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K:
1 x LED 7,9 W 450 mA
3000 K - 3500K:
1 x LED 7,7 W 450 mA
Constant Current 450 mA
220-240Vac 50/60Hz

Packaging


1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,67 Kg Net weight 0,49 Kg

Notes

6330 __ / __ 1: DALI-2 **Bi-volt**
6330 __ / __ B: Push; 1-10V **Bi-volt**


LED **IP20** **CE** **UK** **ERL** **Dimmer**

Ø 3 cm




6331 Medium

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1 2700 K - 916 lm	6331 __ / __
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2 3000 K - 925 lm	__ / 0 On/ Off (Remote)
● 37/ __ Terra Red (NCS S 4040-Y70R)	/3 3500 K - 959 lm	__ / 1 DALI-2 (Remote)
● 42/ __ Blue M1 (NCS S 5010-B10G)		__ / B Push; 1-10V (Remote)
● 53/ __ Green M1 (NCS S 6005-G80Y)	CRI >90	__ / Z Casambi (Remote)


Materials Body: Aluminum. Diffuser: PC- Polycarbonate.	Packaging 1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m ³ Gross weight 0,67 Kg Net weight 0,49 Kg
Light Source and electronics 2700 K: 1 x LED 7,9 W 450 mA	Notes 6331 __ / __ 1: DALI-2  6331 __ / __ B: Push; 1-10V 
3000 K - 3500K: 1 x LED 7,7 W 450 mA Constant Current 450 mA 220~240Vac 50/60Hz	     
	

6332 Wide


Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1 2700 K - 916 lm	6332 __ / __
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2 3000 K - 925 lm	__ / 0 On/ Off (Remote)
● 37/ __ Terra Red (NCS S 4040-Y70R)	/3 3500 K - 959 lm	__ / 1 DALI-2 (Remote)
● 42/ __ Blue M1 (NCS S 5010-B10G)		__ / B Push; 1-10V (Remote)
● 53/ __ Green M1 (NCS S 6005-G80Y)	CRI >90	__ / Z Casambi (Remote)

Materials Body: Aluminum. Diffuser: PC- Polycarbonate.	Packaging 1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m ³ Gross weight 0,67 Kg Net weight 0,49 Kg
Light Source and electronics 2700 K: 1 x LED 7,9 W 450 mA	Notes 6332 __ / __ 1: DALI-2  6332 __ / __ B: Push; 1-10V 
3000 K - 3500K: 1 x LED 7,7 W 450 mA Constant Current 450 mA 220~240Vac 50/60Hz	     
	

Spotlight - Accent

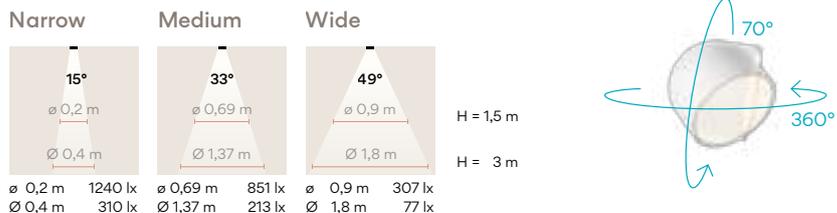

6333
Flat Diffuser



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)
- LED Colour Temperature**
- /1 _ 2700 K - 491 lm
 - /2 _ 3000 K - 546 lm
 - /3 _ 3500 K - 566 lm
- LED CRI >90

- Control**
- 6333** _ _ / _ _
-
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **1** DALI-2 (Remote)
- _ _ / _ **B** Push; 1-10V (Remote)
-
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
2700 K:
1 x LED 4,2 W 250 mA
3000 K - 3500K:
1 x LED 4,1 W 250 mA
Constant Current 250 mA
220-240Vac 50/60Hz

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,67 Kg Net weight 0,49 Kg

Notes
6333 _ _ / _ 1: DALI-2
6333 _ _ / _ B: Push; 1-10V

Ø 3 cm

6335



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)
- LED Colour Temperature**
- /1 _ 2700 K - 941 lm
 - /2 _ 3000 K - 987 lm
 - /3 _ 3500 K - 1022 lm
- LED CRI >90

- Control**
- 6335** _ _ / _ _
-
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **1** DALI-2 (Remote)
- _ _ / _ **B** Push; 1-10V (Remote)
-
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 7,9 W 450 mA
Constant Current 450 mA
220-240Vac 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,31 Kg Net weight 0,89 Kg

Notes
6335 _ _ / _ 1: DALI-2
6335 _ _ / _ B: Push; 1-10V

Ø 5,5 cm

6340



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)
- LED Colour Temperature**
- /1 _ 2700 K - 1673 lm
 - /2 _ 3000 K - 1752 lm
 - /3 _ 3500 K - 1817 lm
- LED CRI >90

- Control**
- 6340** _ _ / _ _
-
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **1** DALI-2 (Remote)
- _ _ / _ **B** Push; 1-10V (Remote)
-
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 16 W 850 mA
Constant Current 850 mA
220-240Vac 50/60Hz

Packaging
1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,20 Kg Net weight 1,70 Kg

Notes
6340 _ _ / _ 1: DALI-2
6340 _ _ / _ B: Push; 1-10V

Ø 5,5 cm

Table Floor



6341 Accent medium / Surface

6343 Flat diffuser / Surface


Ø 10 x 50 cm

6346 Accent medium / Bolt-down

6348 Flat diffuser / Bolt-down

Ø 10 x 50 cm

6341
Accent medium / Surface
6343
Flat diffuser / Surface



6341 Accent medium / Surface

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)
- **37/** __ Terra Red
(NCS S 4040-Y70R)
- **42/** __ Blue M1
(NCS S 5010-B10G)
- **53/** __ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1_ 2700 K - 941 lm
 - /2_ 3000 K - 987 lm
 - /3_ 3500 K - 1022 lm
- E** >
- CRI >90

Control

- 6341** __ / __
-
- __ / __ **5** Push
- __ / __ **Y** ProtoPixel*
- __ / __ **Z** Casambi

Materials

Body: Aluminum.
Base: Steel / Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

Cable with plug included.

LED > IP20 CE UK ENE > Dimmer

6343 Flat diffuser / Surface

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)
- **37/** __ Terra Red
(NCS S 4040-Y70R)
- **42/** __ Blue M1
(NCS S 5010-B10G)
- **53/** __ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1_ 2700 K - 531 lm
 - /2_ 3000 K - 557 lm
 - /3_ 3500 K - 557 lm
- E** >
- CRI >90

Control

- 6343** __ / __
-
- __ / __ **5** Push
- __ / __ **Y** ProtoPixel*
- __ / __ **Z** Casambi

Materials

Body: Aluminum.
Base: Steel.
Spot: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

LED > IP20 CE UK ENE > Dimmer

6346

Accent medium / Bolt-down

6348

Flat diffuser / Bolt-down

6346 Accent medium / Bolt-down

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)
- **37/** __ Terra Red
(NCS S 4040-Y70R)
- **42/** __ Blue M1
(NCS S 5010-B10G)
- **53/** __ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 941 lm
- /2** _ 3000 K - 987 lm
- /3** _ 3500 K - 1022 lm



CRI >90

Control

6346 __ / __

__ / _ **1** DALI-2

__ / _ **Z_40** Casambi

Materials

Body: Aluminum,
Spot: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes

6346 __ / _ 1: DALI-2 **Bi-volt**



6348 Flat diffuser / Bolt-down

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)
- **37/** __ Terra Red
(NCS S 4040-Y70R)
- **42/** __ Blue M1
(NCS S 5010-B10G)
- **53/** __ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 531 lm
- /2** _ 3000 K - 557 lm
- /3** _ 3500 K - 557 lm



CRI >90

Control

6348 __ / __

__ / _ **1** DALI-2

__ / _ **Z_40** Casambi

Materials

Body: Aluminum,
Spot: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes

6348 __ / _ 1: DALI-2 **Bi-volt**



Wall Table Floor



Accent medium
6361 Surface / Bolt-down
 Ø 10 cm

Flat diffuser
6363 Surface / Bolt-down
 Ø 10 cm


Flat diffuser
6365 Surface / Bolt-down
 Ø 20 cm

Flat diffuser
6370 Surface / Bolt-down
 Ø 30 cm



6361
Accent medium
Surface / Bolt down

6363
Flat diffuser Surface /
Bolt-down



6361 Accent medium Surface / Bolt-down

Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 941 lm
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2_ 3000 K - 987 lm
● 37/ __ Terra Red (NCS S 4040-Y70R)	/3_ 3500 K - 1022 lm
● 42/ __ Blue M1 (NCS S 5010-B10G)	E
● 53/ __ Green M1 (NCS S 6005-G80Y)	CRI >90

Control

6361 __ / __
__ / 5 Push
__ / Y ProtoPixel*
__ / Z Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³
Gross weight 0,95 Kg Net weight 0,73 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

*Available from January 2025.

Cable with plug included. Electric cable 2 m.

Base: Ø 6 cm. Height 2,3 cm.



6363 Flat diffuser Surface / Bolt-down

Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 531 lm
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2_ 3000 K - 557 lm
● 37/ __ Terra Red (NCS S 4040-Y70R)	/3_ 3500 K - 557 lm
● 42/ __ Blue M1 (NCS S 5010-B10G)	E
● 53/ __ Green M1 (NCS S 6005-G80Y)	CRI >90

Control

6363 __ / __
__ / 5 Push
__ / Y ProtoPixel*
__ / Z Casambi (Remote)

Materials

Body: Aluminum.
Base: Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³
Gross weight 0,98 Kg Net weight 0,73 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


*Available from January 2025.

Cable with plug included. Electric cable 2 m.

Base: Ø 6 cm. Height 2,3 cm.



6365
 Flat diffuser Surface / Bolt-down



- Finishes**
- 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 42/ __ Blue M1 (NCS S 5010-B10G)
 - 53/ __ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 _ 2700 K - 941 lm
 - /2 _ 3000 K - 987 lm
 - /3 _ 3500 K - 1022 lm
- ☐ E ☐
 CRI >90

- Control**
- 6365** __ / __
-
- __ / __ 5 Push
- __ / __ Y ProtoPixel*
- __ / __ Z Casambi

Materials
 Body: Aluminum.
 Base: Zinc Alloy.
 Diffuser: PC- Polycarbonate.


Light Source and electronics
 1 x LED 7,9 W 450 mA
 Constant Current 450 mA
 220~240Vac 50/60Hz

Packaging
 1 Box 0,26 x 0,26 x 0,26 m
 Vol 0,0175 m³
 Gross weight 1,31 Kg Net weight 0,89 Kg

Notes
 ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
 *Available from January 2025.
 Cable with plug included. Electric cable 2 m.
 Base: Ø 8,2 cm. Height 2,3 cm.



6370
 Flat diffuser Surface / Bolt-down



- Finishes**
- 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 42/ __ Blue M1 (NCS S 5010-B10G)
 - 53/ __ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 _ 2700 K - 1673 lm
 - /2 _ 3000 K - 1752 lm
 - /3 _ 3500 K - 1817 lm
- ☐ E ☐
 CRI >90


- Control**
- 6370** __ / __
-
- __ / __ 5 Push
- __ / __ Y ProtoPixel*
- __ / __ Z Casambi

Materials
 Body: Aluminum.
 Base: Zinc Alloy.
 Diffuser: PC- Polycarbonate.

Light Source and electronics
 1 x LED 16 W 850 mA
 Constant Current 850 mA
 220~240Vac 50/60Hz

Packaging
 1 Box 0,364 x 0,364 x 0,364 m
 Vol 0,0482 m³
 Gross weight 2,20 Kg Net weight 1,70 Kg

Notes
 ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
 *Available from January 2025.
 Cable with plug included. Electric cable 2 m.
 Base: Ø 11 cm. Height 2,8 cm.



Kontorno

Design by Sebastian Herkner


Consisting of an elegant linear framework complemented by a cylindrical diffuser or curved reflector, the Kontorno collection envelops the light source it contains, offering diffuse, balanced illumination.

Wall



6414 20 x 92 cm **6416** 20 x 122 cm **6418** 20 x 162 cm **6444** 19 x 92 cm **6446** 19 x 122 cm

6414



Finishes
● 11/ __ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2381 lm
E →
/2 _ 3000 K - 2381 lm
F →
/3 _ 3500 K - 2551 lm
E →
/7 _ 2200 K - 2041 lm
F →
CRI >90

Control
6414 __ / __
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 5 Push
__ / _ Z Casambi

Materials
Concave shade: Aluminum. Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum.


Light Source and electronics
1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90-305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

Notes
6414 __ / _ 1: DALI-2 **Multi-volt**
6414 __ / _ 3: 1-10V **Multi-volt**
6414 __ / _ 5: Push **Multi-volt**

LED IP20 CE UK ENEC Dimmer

6416



Finishes
● 11/ __ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3154 lm
E →
/2 _ 3000 K - 3154 lm
F →
/3 _ 3500 K - 3380 lm
E →
/7 _ 2200 K - 2703 lm
F →
CRI >90

Control
6416 __ / __
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 5 Push
__ / _ Z Casambi

Materials
Concave shade: Aluminum. Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum.


Light Source and electronics
1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90-305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 5,8 Kg Net weight 3,8 Kg

Notes
6416 __ / _ 1: DALI-2 **Multi-volt**
6416 __ / _ 3: 1-10V **Multi-volt**
6416 __ / _ 5: Push **Multi-volt**

LED IP20 CE UK ENEC Dimmer

6418



Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 4205 lm
 E
 /2 _ 3000 K - 4205 lm
 F
 /3 _ 3500 K - 4506 lm
 E
 /7 _ 2200 K - 3604 lm
 F
 CRI >90

Control

6418 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ 5 Push
 __ / _ Z Casambi

Materials

Concave shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 37,2 W 750 mA
 Constant Current 750 mA
 90-305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 0,175 m
 Vol 0,1580 m³
 Gross weight 6,5 Kg Net weight 4 Kg

Notes

6418 __ / _ 1: DALI-2 Multi-volt
 6418 __ / _ 3: 1-10V Multi-volt
 6418 __ / _ 5: Push Multi-volt

LED IP20 CE UK ENEC Dimmer

6444



Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 2381 lm
 E
 /2 _ 3000 K - 2381 lm
 F
 /3 _ 3500 K - 2551 lm
 E
 /7 _ 2200 K - 2041 lm
 F
 CRI >90

Control

6444 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ 5 Push
 __ / _ Z Casambi

Materials

Glass shade: Opal triplex.
 Diffuser: PC- Polycarbonate.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 20,8 W 750 mA
 Constant Current 750 mA
 90-305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,05 m
 Vol 0,095 m³
 Gross weight 6,2 Kg Net weight 3,7 Kg

Notes

6444 __ / _ 1: DALI-2 Multi-volt
 6444 __ / _ 3: 1-10V Multi-volt
 6444 __ / _ 5: Push Multi-volt

LED IP20 CE UK ENEC Dimmer

6446

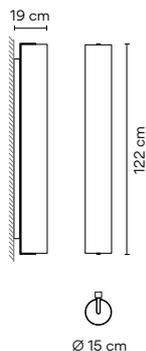

Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 3154 lm
 E
 /2 _ 3000 K - 3154 lm
 F
 /3 _ 3500 K - 3380 lm
 E
 /7 _ 2200 K - 2703 lm
 F
 CRI >90

Control

6446 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ 5 Push
 __ / _ Z Casambi

Materials

Glass shade: Opal triplex.
 Diffuser: PC- Polycarbonate.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 27,9 W 750 mA
 Constant Current 750 mA
 90-305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,35 m
 Vol 0,122 m³
 Gross weight 9 Kg Net weight 6 Kg

Notes

6446 __ / _ 1: DALI-2 Multi-volt
 6446 __ / _ 3: 1-10V Multi-volt
 6446 __ / _ 5: Push Multi-volt

LED IP20 CE UK ENEC Dimmer

Pendant



6434

92 x max. 200 cm



6436

122 x max. 200 cm



6438

162 x max. 200 cm



6474

92 x max. 200 cm



6476

122 x max. 200 cm

6434

Finishes


- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 2381 lm
 - /2 _ 3000 K - 2381 lm
 - /3 _ 3500 K - 2551 lm
 - /7 _ 2200 K - 2041 lm
- CRI >90

Control

- 6434** _ / _ _
- _ / _ 1 DALI-2
 - _ / _ 3 1-10V
 - _ / _ 5 Push
 - _ / _ Z Casambi



Materials

Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90-305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

Notes

- 6434 _ / _ 1: DALI-2 Multi-volt
 - 6434 _ / _ 3: 1-10V Multi-volt
 - 6434 _ / _ 5: Push Multi-volt
- Extra cable length.



6436



Finishes
 ● 11/ __ Black (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 3154 lm [E]
 /2 _ 3000 K - 3154 lm [F]
 /3 _ 3500 K - 3380 lm [E]
 /7 _ 2200 K - 2703 lm [F]
 CRI >90

Control

6436 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ 5 Push
 __ / _ Z Casambi

Materials

Concave shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 27,9 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,35 m
 Vol 0,122 m³
 Gross weight 5,8 Kg Net weight 3,8 Kg


Notes

6436 __ / _ 1: DALI-2 [Multi-volt]
 6436 __ / _ 3: 1-10V [Multi-volt]
 6436 __ / _ 5: Push [Multi-volt]

Extra cable length.



6438



Finishes
 ● 11/ __ Black (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 4205 lm [E]
 /2 _ 3000 K - 4205 lm [F]
 /3 _ 3500 K - 4505 lm [E]
 /7 _ 2200 K - 3604 lm [F]
 CRI >90

Control

6438 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ 5 Push
 __ / _ Z Casambi

Materials

Concave shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 37,2 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,75 m
 Vol 0,158 m³
 Gross weight 6,5 Kg Net weight 4 Kg


Notes

6438 __ / _ 1: DALI-2 [Multi-volt]
 6438 __ / _ 3: 1-10V [Multi-volt]
 6438 __ / _ 5: Push [Multi-volt]

Extra cable length.



6474



Finishes
 ● 11/ __ Black (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 2381 lm [E]
 /2 _ 3000 K - 2381 lm [F]
 /7 _ 2200 K - 2041 lm [F]
 CRI >90

Control

6474 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ 5 Push
 __ / _ Z Casambi

Materials

Glass shade: Opal triplex.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 20,8 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,05 m
 Vol 0,095 m³
 Gross weight 6,2 Kg Net weight 3,7 Kg

Notes

6474 __ / _ 1: DALI-2 [Multi-volt]
 6474 __ / _ 3: 1-10V [Multi-volt]
 6474 __ / _ 5: Push [Multi-volt]

Extra cable length.




6476

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1_ 2700 K - 3154 lm
 E
 /2_ 3000 K - 3154 lm
 /7_ 2200 K - 2703 lm
 F
 CRI >90

Control
 6476 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ 5 Push
 _ _ / _ Z Casambi



Materials
 Glass shade: Opal triplex.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 27,9 W 750 mA
 Constant Current 750 mA
 90-305V 50/60Hz

Packaging
 1 Box 0,75 x 0,45 x 1,35 m
 Vol 0,122 m³
 Gross weight 9 Kg Net weight 6 Kg

Notes
 6476 _ _ / 1: DALI-2 Multi-volt
 6476 _ _ / 3: 1-10V Multi-volt
 6476 _ _ / 5: Push Multi-volt

Extra cable length.

LED IP20 CE UK ENEC Dimmer





Bind

Design by Martín Azúa

Bind is a hybrid lighting system designed to create multiple atmospheres to suit a range of spaces, uses and moods. The connective quality, ease of installation and versatility of this fully modular system guarantees a harmonious balance between technical and decorative lighting, promising new holistic lighting solutions.

Pendant Ceiling - Accent Downlight

DOWNLIGHT Ø 3 cm

6500 Narrow
6504 Medium
Ø 3 x 15 cm



DOWNLIGHT Ø 4 cm

6520 Narrow
6524 Medium
6528 Wide
Ø 4 x 17,5 cm



6525 Medium
6529 Wide
Ø 4 x 20 cm



Pendant Ceiling - Accent Spotlight

SPOTLIGHT Ø 3 cm

6510 Narrow
6514 Medium
Ø 3 x 20 cm



SPOTLIGHT Ø 4 cm

6530 Narrow
6534 Medium
6538 Wide
Ø 4 x 22,5 cm




Pendant Ceiling - Wide Accent Downlight

DOMO Ø 18,5 cm

6540 Medium
6542 Wide



6500
Narrow
6504
Medium



6500 Narrow

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K - 451 lm	6500 __ / __
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 471 lm	__ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	/3 _ 3500 K - 489 lm	__ / _ Y ProtoPixel* (P2P)
	F >	__ / _ Z Casambi (P2P)
	CRI >90	

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics
1 x LED 4,3 W 250 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,6 Kg Net weight 0,12 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



6504 Medium

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K - 451 lm	6504 __ / __
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 471 lm	__ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	/3 _ 3500 K - 489 lm	__ / _ Y ProtoPixel* (P2P)
	F >	__ / _ Z Casambi (P2P)
	CRI >90	

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics
1 x LED 4,3 W 250 mA

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,6 Kg Net weight 0,12 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



6520
Narrow
6524
Medium
6528
Wide



6520 Narrow

Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K - 530 lm
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 554 lm
	/3 _ 3500 K - 574 lm



Control

6520 __ / __
__ / __ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
__ / __ Y ProtoPixel* (P2P)
__ / __ Z Casambi (P2P)

Materials


Lens: PMMA.
Body: Aluminum.
Light Source and electronics
1 x LED LED 5,2 W 300 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



6524 Medium

Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K - 530 lm
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 554 lm
	/3 _ 3500 K - 574 lm



Control

6524 __ / __
__ / __ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
__ / __ Y ProtoPixel* (P2P)
__ / __ Z Casambi (P2P)

Material

Lens: PMMA.
Body: Aluminum.
Light Source and electronics
1 x LED LED 5,2 W 300 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



6528 Wide

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K - 530 lm	6528 __ / __
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 554 lm	__ / __ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	/3 _ 3500 K - 574 lm	__ / __ Y ProtoPixel* (P2P)
	F	__ / __ Z Casambi (P2P)
	CRI >90	

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics


1 x LED LED 5,2 W 300 mA

Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

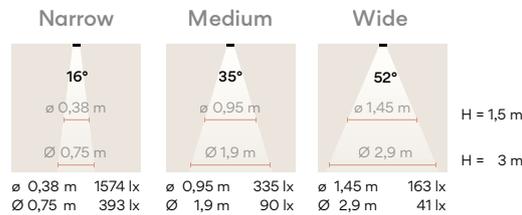

6525 Medium 6529 Wide



6525 Medium

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	Tunable White /8 _ (1800 K - 4000 K)	6525 __ / __
● 24/ __ Beige M1 (NCS S 2005-Y50R)	308 lm - 504 lm	__ / 8Y ProtoPixel* (P2P)
	E	__ / 8Z Casambi (P2P)
	CRI >90	

Materials

Lens: Polycarbonate.
Body: Aluminum.

Light Source and electronics

1 x LED 5,5 W 150 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,8 Kg Net weight 0,2 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



6529 Wide

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	Tunable White /8 _ (1800 K - 4000 K)	6529 __ / __
● 24/ __ Beige M1 (NCS S 2005-Y50R)	308 lm - 504 lm	__ / 8Y ProtoPixel* (P2P)
	E	__ / 8Z Casambi (P2P)
	CRI >90	

Materials

Lens: Polycarbonate.
Body: Aluminum.

Light Source and electronics


1 x LED 5,5 W 150 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,8 Kg Net weight 0,2 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



6510

Narrow

6514

Medium

6510 Narrow

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)


LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm

CRI >90

Control

- 6510** __ / __
- __ / **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
 - __ / **Y** ProtoPixel* (P2P)
 - __ / **Z** Casambi (P2P)



Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

1 x LED 4,3 W 250 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



6514 Medium

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm

CRI >90

Control

- 6514** __ / __
- __ / **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
 - __ / **Y** ProtoPixel* (P2P)
 - __ / **Z** Casambi (P2P)

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

1 x LED 4,3 W 250 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).




Narrow

Medium

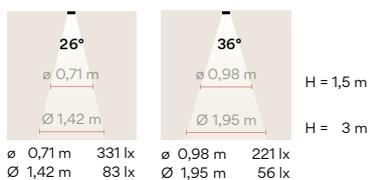

6530
Narrow
6534
Medium
6538
Wide



6530 Narrow

- Finishes**
- **11/ _ _ Black**
(NCS S 8500-N)
 - **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

- /1 _ 2700 K - 530 lm**
- /2 _ 3000 K - 554 lm**
- /3 _ 3500 K - 574 lm**

F

CRI >90

Control
6530 _ _ / _ _

- _ _ / _ **F** On/Off; Push; 1-10V; DALI-2;
Casambi Simultaneous Line
- _ _ / _ **Y** ProtoPixel* (P2P)
- _ _ / _ **Z** Casambi (P2P)

Materials

Lens: PMMA
Body: Aluminum.


Light Source and electronics
1 x LED 5,2 W 300 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,87 Kg Net weight 0,27 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



6534 Medium

- Finishes**
- **11/ _ _ Black**
(NCS S 8500-N)
 - **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1 _ 2700 K - 530 lm**
- /2 _ 3000 K - 554 lm**
- /3 _ 3500 K - 574 lm**

Tunable White

- /8 _ (1800 K - 4000 K)**
308 lm - 504 lm

F

CRI >90

Control
6534 _ _ / _ _

- _ _ / _ **F** On/Off; Push; 1-10V; DALI-2;
Casambi Simultaneous Line
- _ _ / _ **Y** ProtoPixel* (P2P)
- _ _ / _ **Z** Casambi (P2P)
- _ _ / **8Y** Tunable White +
ProtoPixel* (P2P)
- _ _ / **8Z** Tunable White +
Casambi (P2P)

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Tunable White:
1 x LED 5,6 W 150 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,87 Kg Net weight 0,27 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



6538 Wide

- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1** _ 2700 K - 530 lm
 - /2** _ 3000 K - 554 lm
 - /3** _ 3500 K - 574 lm

- Tunable White**
- /8** _ (1800 K - 4000 K) 308 lm - 504 lm



CRI >90

Control

6538 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line

_ _ / _ **Y** ProtoPixel* (P2P)

_ _ / _ **Z** Casambi (P2P)

_ _ / **8Y** Tunable White + ProtoPixel* (P2P)

_ _ / **8Z** Tunable White + Casambi (P2P)

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 5,2 W 300 mA

Tunable White:

1 x LED 5,6 W 150 mA

Packaging


1 Box 0,065 x 0,145 x 0,275 m

Vol 0,0026 m³


Gross weight 0,87 Kg Net weight 0,27 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

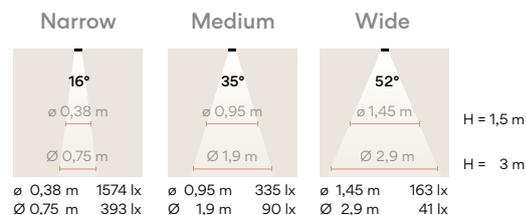

6540
Medium
6542
Wide



6540 Medium

- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

F

CRI >90

Control
6540 __ / __

- __ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- __ / _ **Y** ProtoPixel* (P2P)
- __ / _ **Z** Casambi (P2P)
- __ / **8Y** Tunable White + ProtoPixel* (P2P)
- __ / **8Z** Tunable White + Casambi (P2P)

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA

Tunable White:
1 x LED 8,9 W 500 mA
(max. combined)

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,5 Kg Net weight 1 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



6542 Wide

- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

F

CRI >90

Control
6542 __ / __

- __ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- __ / _ **Y** ProtoPixel* (P2P)
- __ / _ **Z** Casambi (P2P)
- __ / **8Y** Tunable White + ProtoPixel* (P2P)
- __ / **8Z** Tunable White + Casambi (P2P)

Materials

Diffuser: PC- Polycarbonate.
Lens: Polycarbonate.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA


Tunable White:
1 x LED 8,9 W 500 mA
(max. combined)

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,5 Kg Net weight 1 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).



Medium

Wide



Luminaire types

Bind track is compatible with the Skan, Slim, North, Tempo and Tube pendant collections, presenting a range of decorative silhouettes with multiple lighting effects. Single or multiple pendant can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendant.

Pendant



6560 (11 Black)
6561 (24 Beige)

6570 (11 Black)
6571 (24 Beige)

6575 (11 Black)
6576 (24 Beige)

6590 (11 Black)
6591 (24 Beige)



6580 (11 Black)
6581 (24 Beige)

6583 (11 Black)
6584 (24 Beige)

6586 (11 Black)
6587 (24 Beige)



Multiple fixtures can be connected at any point using a pincer.

● Black (NCS S 8500-N)

● Beige M1 (NCS S 2005-Y50R)

6560
Black pincer
6561
Beige pincer



Finishes (shade)	LED Colour Temperature	Control
● 10/ __ White (NCS S 0300-N)	/1_ 2700 K - 1269 lm D	6560 __ / __ 6561 __ / __
● 11/ __ Black (NCS S 8500-N)	CRI >90	
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2_ 3000 K - 1123 lm D	__ / __ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
● 37/ __ Terra Red (NCS S4040-Y70R)	CRI >80	__ / __ Y ProtoPixel* (P2P)
● 42/ __ Blue M1 (NCS S 1000-N)	/3_ 3500 K - 1374,9 lm G	__ / __ Z Casambi (P2P)
● 47/ __ Green L1 (NCS S 4005-G80Y)	CRI >90	

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

6560

Finishes (pincer)
● Black (NCS S 8500-N)

6561

Finishes (pincer)
● Beige M1 (NCS S 2005-Y50R)

Materials

Body: Aluminum.
Diffuser: PMMA.

Light Source and electronics

1 x LED 9,3 W 350 mA
Constant Current 350 mA
110-277V 50/60Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m³
Gross weight 2,6 Kg Net weight 1,4 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Extra cable length.




6570

Black pincer

6571

Beige pincer



- Finishes (shade)**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
 - 68/ __ Ocre (NCS S 3050-Y30R)
- Finish customization**
(Available options:
Vibia colour palette
Minimum quantity 10 units. Price + 10%)
- LED Colour Temperature**
- /1 _ 2700 K - 181,22 lm
[F]
 - /2 _ 3000 K - 163,2 lm
[G]
 - /3 _ 3500 K - 207,6 lm
[F]
- CRI >90**

- Control**
- 6570** __ / __
6571 __ / __
-
- __ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- __ / _ Y ProtoPixel* (P2P)
- __ / _ Z Casambi (P2P)

6570

- Finishes (pincer)**
- Black (NCS S 8500-N)

6571

- Finishes (pincer)**
- Beige M1 (NCS S 2005-Y50R)

Materials

Diffuser: Glass.
Body: FG- Fiberglass.

Light Source and electronics


1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,19 x 1,21 m
Vol 0,0370 m³
Gross weight 2,48 Kg Net weight 1,35 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Extra cable length.



6575

Black pincer

6576

Beige pincer



- Finishes (shade)**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 42 / __ Blue M1 (NCS S 5010-B10G)
- Finish customization**
(Available options:
Vibia colour palette
Minimum quantity 10 units. Price + 10%)
- LED Colour Temperature**
- /1 _ 2700 K - 1269 lm
[D]
 - /2 _ 3000 K - 1123 lm
[D]
 - /3 _ 3500 K - 1374,9 lm
[G]
- CRI >90**

- Control**
- 6575** __ / __
6576 __ / __
-
- __ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- __ / _ Y ProtoPixel* (P2P)
- __ / _ Z Casambi (P2P)

6575

- Finishes (pincer)**
- Black (NCS S 8500-N)

6576

- Finishes (pincer)**
- Beige M1 (NCS S 2005-Y50R)

Materials

Shade: Aluminum.
Diffuser: PMMA.

Light Source and electronics


1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging


1 Box 0,24 x 0,217 x 0,217 m
Vol 0,01 m³
Gross weight 2,3 Kg Net weight 1,25 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Extra cable length.



6590
Black pincer
6591
Beige pincer



- Finishes (shade)**
- 10/ __ White (NCS S 0300-N)
 - 15/ __ Grey L2 (NCS S 2500-N)
 - 16/ __ Grey M1 (NCS S 4500-N)
 - 21/ __ Black Grey (NCS S 7000-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
- Finish customization**
(Available options:
Vibia colour palette
Minimum quantity
10 units. Price + 10%)

- LED Colour Temperature**
- /1 _ 2700 K - 1170 lm
 - /2 _ 3000 K - 1251 lm
 - /3 _ 3500 K - 1251 lm
- ☞ E
- CRI >90

- Control**
- 6590** __ / __
6591 __ / __
-
- __ / _ F On/Off; Push; 1-10V; DALI-2;
Casambi Simultaneous Line
- __ / _ Y ProtoPixel* (P2P)
- __ / _ Z Casambi (P2P)

- 6590**
Finishes (pincer)
● Black (NCS S 8500-N)

- 6591**
Finishes (pincer)
● Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: PC- Polycarbonate.
Shade: Aluminum.
Led support: Aluminum.
Tube: Steel.


Light Source and electronics
1 x LED PLATE 10,5 W 15 V
Constant Current 700 mA
110-240V 50/60Hz

Packaging
1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m³
Gross weight 2,6 Kg Net weight 1,4 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Extra cable length.



6580
Black pincer
6581
Beige pincer



- Finishes (shade)**
- 18/ __ Graphite (ADAPTA RF9913WX)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 58/ __ Cream (RAL 7044)
 - 62/ __ Green (NCS S 3010-G20Y)

- LED Colour Temperature**
- /1 _ 2700 K - 415 lm
- ☞ E
- CRI >90

- Control**
- 6580** __ / __
6581 __ / __
-
- __ / _ F On/Off; Push; 1-10V; DALI-2;
Casambi Simultaneous Line
- __ / _ Y ProtoPixel* (P2P)
- __ / _ Z Casambi (P2P)


- 6580**
Finishes (pincer)
● Black (NCS S 8500-N)
- 6581**
Finishes (pincer)
● Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: Blown-glass.
Body: Aluminum

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging
1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Extra cable length.



6583
 Black pincer
6584
 Beige pincer



Finishes (shade)	LED Colour Temperature	Control
● 18/ __ Graphite (ADAPTA RF9913WX)	/1_ 2700 K - 415 lm	6583 __ / __
● 37/ __ Terra Red (NCS S 4040-Y70R)	CRI >90	6584 __ / __
● 58/ __ Cream (RAL 7044)		__ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
● 62/ __ Green (NCS S 3010-G20Y)		__ / _ Y ProtoPixel* (P2P)
		__ / _ Z Casambi (P2P)

6583

Finishes (pincer)
 ● Black (NCS S 8500-N)

6584

Finishes (pincer)
 ● Beige M1 (NCS S 2005-Y50R)

Materials

Diffuser: Blown-glass.
 Body: Aluminum

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging

1 Box 0,28 x 0,26 x 0,13 m
 Vol 0,01 m³
 Gross weight 2,5 Kg Net weight 2 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
 Extra cable length.



6586
 Black pincer
6587
 Beige pincer



Finishes (shade)	LED Colour Temperature	Control
● 18/ __ Graphite (ADAPTA RF9913WX)	/1_ 2700 K - 415 lm	6586 __ / __
● 37/ __ Terra Red (NCS S 4040-Y70R)	CRI >90	6587 __ / __
● 58/ __ Cream (RAL 7044)		__ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
● 62/ __ Green (NCS S 3010-G20Y)		__ / _ Y ProtoPixel* (P2P)
		__ / _ Z Casambi (P2P)

6586

Finishes (pincer)
 ● Black (NCS S 8500-N)

6587

Finishes (pincer)
 ● Beige M1 (NCS S 2005-Y50R)

Materials

Diffuser: Blown-glass.
 Body: Aluminum

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging

1 Box 0,28 x 0,26 x 0,13 m
 Vol 0,01 m³
 Gross weight 2,5 Kg Net weight 2 Kg


Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
 Extra cable length.



MULTIPLE MODELS

Select your model at vibia.com and adjust



See more
multiple models
at vibia.com

Tracks

Ceiling Tracks

A491 120 cm
A492 210 cm
A493 300 cm



Ceiling Tracks 120 cm A491 __ / OM

Ceiling Tracks 210 cm A492 __ / OM

Ceiling Tracks 300 cm A493 __ / OM

Finishes

- 11/ OM Black (NCS S 8500-N)
- 24/ OM Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Canopy: ABS + Polycarbonate.



Packaging A491

1 Box
0,068 x 0,068 x 1,25 m
Vol 0,0058 m³
Gross weight 1,75 Kg
Net weight 0,90 Kg

Packaging A492

1 Box
0,068 x 0,068 x 2,4 m
Vol 0,0111 m³
Gross weight 3,24 Kg
Net weight 1,62 Kg

Packaging A493

1 Box
0,068 x 0,068 x 3,15 m
Vol 0,0146 m³
Gross weight 4,36 Kg
Net weight 2,17 Kg



Pendant Tracks

- A419** 120 cm (H 9m)
- A422** 210 cm (H 9m)
- A425** 300 cm (H 9m)



Height 9 m 120 cm **A419** __ / OM
 Height 9 m 210 cm **A422** __ / OM
 Height 9 m 300 cm **A425** __ / OM

Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
 Canopy: Aluminum.
 Ceiling supports: Aluminum.



Packaging A419

1 Box
 0,068 x 0,068 x 1,25 m
 Vol 0,0058 m³
 Gross weight 1,87 Kg
 Net weight 1,02 Kg

Packaging A422

1 Box
 0,068 x 0,068 x 2,4 m
 Vol 0,0111 m³
 Gross weight 3,24 Kg
 Net weight 1,62 Kg

Packaging A425

1 Box
 0,068 x 0,068 x 3,15 m
 Vol 0,0146 m³
 Gross weight 4,36 Kg
 Net weight 2,17 Kg



Electrical connection options

Driver for ceiling

A494 __ / _____

__ / 00_10	48W + On/ Off + Surface
__ / 00_31	48W + On/ Off + Remote Micro
__ / 01_10	48W + DALI-2 + Surface
__ / 01_31	48W + DALI-2 + Remote Micro
__ / 03_10	48W + 1-10V + Surface
__ / 03_31	48W + 1-10V + Remote Micro
__ / 05_10	48W + Push + Surface
__ / 05_31	48W + Push + Remote Micro
__ / 0Z_10	48W + Casambi + Surface
__ / 0Z_31	48W + Casambi + Remote Micro

A495 __ / _____

__ / 00_10	84W + On/ Off + Surface
__ / 00_31	84W + On/ Off + Remote Micro
__ / 01_10	84W + DALI-2 + Surface
__ / 01_31	84W + DALI-2 + Remote Micro
__ / 03_10	84W + 1-10V + Surface
__ / 03_31	84W + 1-10V + Remote Micro
__ / 05_10	84W + Push + Surface
__ / 05_31	84W + Push + Remote Micro
__ / 0Z_10	84W + Casambi + Surface
__ / 0Z_31	84W + Casambi + Remote Micro

Finishes

- 11/ 0 _ Black (NCS S 8500-N)
- 24/ 0 _ Beige M1 (NCS S 2005-Y50R)

Materials

Aluminum.



Electrical connection

Driver Constant Voltage 48V
220-240V 50/60Hz

Notes

Max. 5 luminaires with Simultaneous line 48 W.
Max.10 luminaires with Simultaneous line 84 W.
Select On/ Off if your luminaires are P2P.

Packaging

1 Box 0,12 x 0,10 x 0,37 m
Vol 0,0273 m³
Gross weight 0,95 Kg
Net weight 0,53 Kg

⚡ Select Electrical connection



L 30 cm.

A494 __ / 00 A495 __ / 00

Surface



L 40 cm.

A494 __ / 01 A495 __ / 01

A494 __ / 03 A495 __ / 03

A494 __ / 05 A495 __ / 05

A494 __ / 0Z A495 __ / 0Z

Surface



Remote



_10 Surface
_31 Remote
Micro

Included in tracks electrical connections



Remote
1 x 9 m
electrical cable
included

Driver for pendant

A426 __ / _____

__ / 00_10 48W + On/ Off + Surface
 __ / 00_23 48W + On/ Off + Built-in XS
 __ / 00_31 48W + On/ Off + Remote Micro
 __ / 01_10 48W + DALI-2 + Surface
 __ / 01_23 48W + DALI-2 + Built-in XS
 __ / 01_31 48W + DALI-2 + Remote Micro
 __ / 03_10 48W + 1-10V + Surface
 __ / 03_23 48W + 1-10V + Built-in XS
 __ / 03_31 48W + 1-10V + Remote Micro
 __ / 05_10 48W + Push + Surface
 __ / 05_23 48W + Push + Built-in XS
 __ / 05_31 48W + Push + Remote Micro
 __ / 0Z_10 48W + Casambi + Surface
 __ / 0Z_23 48W + Casambi + Built-in XS
 __ / 0Z_31 48W + Casambi + Remote Micro

A427 __ / _____

__ / 00_10 84W + On/ Off + Surface
 __ / 00_23 84W + On/ Off + Built-in XS
 __ / 00_31 84W + On/ Off + Remote Micro
 __ / 01_10 84W + DALI-2 + Surface
 __ / 01_23 84W + DALI-2 + Built-in XS
 __ / 01_31 84W + DALI-2 + Remote Micro
 __ / 03_10 84W + 1-10V + Surface
 __ / 03_23 84W + 1-10V + Built-in XS
 __ / 03_31 84W + 1-10V + Remote Micro
 __ / 05_10 84W + Push + Surface
 __ / 05_23 84W + Push + Built-in XS
 __ / 05_31 84W + Push + Remote Micro
 __ / 0Z_10 84W + Casambi + Surface
 __ / 0Z_23 84W + Casambi + Built-in XS
 __ / 0Z_31 84W + Casambi + Remote Micro

Finishes

- 11/ 0 _ Black (NCS S 8500-N)
- 24/ 0 _ Beige M1 (NCS S 2005-Y50R)

Materials

Surface: Aluminum.
 Built-in and Remote Driver box: Steel.



Electrical connection

Driver Constant Voltage 48V
 220-240V 50/60Hz

Notes

Max. 5 luminaires with Simultaneous line 48 W.
 Max.10 luminaires with Simultaneous line 84 W.
 Select On/ Off if your luminaires are P2P.

Packaging

1 Box 0,12 x 0,10 x 0,37 m
 Vol 0,0273 m³
 Gross weight 0,95 Kg
 Net weight 0,53 Kg

Select Electrical connection

L 25 cm.

A426 __ / 01 A427 __ / 00
 A426 __ / 03 A427 __ / 01
 A426 __ / 05 A427 __ / 03
 A426 __ / 0Z A427 __ / 05

Surface

L 21 cm.

A426 __ / 00

Surface

Built-in XS

Remote Micro

_10 Surface
 _23 Built-in XS
 _31 Remote
 Micro

Included in tracks electrical connections



Surface
 Feeder + 9 m
 electrical
 cable included



Built-in
 Canopy + 9 m
 electrical
 cable included



Remote
 Micro canopy + 9 m
 electrical
 cable included

Bind Solo

Bind Solo provides a set of tools to play with contrasts, defining functional and transitional areas, as well as hybrid activity zones. The range can be mounted to the ceiling as desired, creating visual hierarchy by directing the gaze towards specific features and combining to form unique compositions overhead.

Ceiling - Accent Downlight - Micro


6600 Narrow
6604 Medium
Ø 3 cm



6650 Narrow
6654 Medium
6658 Wide
Ø 4cm



6600
Narrow
6604
Medium



6600 Narrow

Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K - 451 lm
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 471 lm
	/3 _ 3500 K - 489 lm
	F >
	CRI >90

Control
6600 __ / __
__ / __ O On/ Off (Remote)
__ / __ D Push; DALI-2 (Remote)
__ / __ M Without driver
__ / __ Z Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,63 Kg Net weight 0,15 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6604 Medium

Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K - 451 lm
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 471 lm
	/3 _ 3500 K - 489 lm
	F >
	CRI >90

Control
6604 __ / __
__ / __ O On/ Off (Remote)
__ / __ D Push; DALI-2 (Remote)
__ / __ M Without driver
__ / __ Z Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,63 Kg Net weight 0,15 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.




6650

Narrow

6654
Medium

6658

Wide



6650 Narrow

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 530 lm
- /2** _ 3000 K - 554 lm
- /3** _ 3500 K - 574 lm



CRI >90

Control

6650 __ / __

- __ / **O** On/ Off (Remote)
- __ / **D** Push; DALI-2 (Remote)
- __ / **M** Without driver
- __ / **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 5,2 W 300 mA
Constant Current 300 mA
220-240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6654 Medium

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1** _ 2700 K - 530 lm
- /2** _ 3000 K - 554 lm
- /3** _ 3500 K - 574 lm

Tunable White

- /8** _ (1800 K - 4000 K)
308 lm - 504 lm



CRI >90

Control

6654 __ / __

- __ / **O** Static White +
On/ Off (Remote)
 - __ / **D** Static White +
Push; DALI-2 (Remote)
 - __ / **M** Static White +
Without driver
 - __ / **Z** Static White +
Casambi (Remote)
-
- __ / **81** Tunable White +
DALI-2 DT8 (Remote)
 - __ / **8M** Tunable White +
Without driver
 - __ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220-240V 50/60Hz

Tunable White:

1 x LED 5,5 W 150 mA
Constant Current 150 mA
110-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.



6658 Wide

- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 530 lm
 - /2 _ 3000 K - 554 lm
 - /3 _ 3500 K - 574 lm

- Tunable White**
- /8 _ (1800 K - 4000 K)
308 lm - 504 lm

F 
CRI >90

Control

- 6658** __ / __
-
- __ / __ **O** Static White +
On/ Off (Remote)
 - __ / __ **D** Static White +
Push; DALI-2 (Remote)
 - __ / __ **M** Static White +
Without driver
 - __ / __ **Z** Static White +
Casambi (Remote)
-
- __ / **81** Tunable White +
DALI-2 DT8 (Remote)
 - __ / **8M** Tunable White +
Without driver
 - __ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 350 mA
220~240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

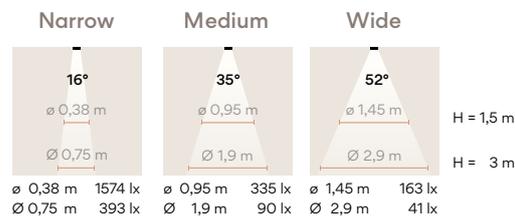

Ceiling - Accent Downlight

DOWNLIGHT Ø 3 cm

6610 Narrow
6614 Medium
Ø 3 x 4 cm



6630 Narrow
6634 Medium
Ø 3 x 10 cm



DOWNLIGHT Ø 4 cm

6660 Narrow
6664 Medium
6668 Wide
Ø 4 x 7 cm



6680 Narrow
6684 Medium
6688 Wide
Ø 4 x 10 cm



Ceiling - Accent Spotlight

SPOTLIGHT Ø 3 cm

6620 Narrow
6624 Medium
Ø 3 x 7 cm



6640 Narrow
6644 Medium
Ø 3 x 11,5 cm



SPOTLIGHT Ø 4 cm

6670 Narrow
6674 Medium
6678 Wide
Ø 4 x 10 cm



6690 Narrow
6694 Medium
6698 Wide
Ø 4 x 14 cm




Ceiling - Wide Accent Downlight

Ø 18,5 cm

6700 Medium
6702 Wide
Ø 18,5 cm



6610
Narrow
6614
Medium



6610 Narrow

- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm

F →

CRI >90

Control

6610 __ / __

__ / __ **O** On/ Off (Remote)

__ / __ **D** Push; DALI-2 (Remote)

__ / __ **M** Without driver

__ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,66 Kg Net weight 0,18 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6614 Medium

- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm

F →

CRI >90

Control

6614 __ / __

__ / __ **O** On/ Off (Remote)

__ / __ **D** Push; DALI-2 (Remote)

__ / __ **M** Without driver

__ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,66 Kg Net weight 0,18 Kg


Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6630
Narrow
6634
Medium



6630 Narrow

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm



CRI >90

Control

6630 _ _ / _ _

- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,67 Kg Net weight 0,19 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6634 Medium

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm



CRI >90

Control

6634 _ _ / _ _

- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220-240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,67 Kg Net weight 0,19 Kg


Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.

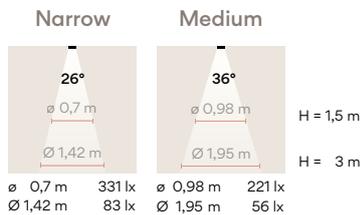

6660
Narrow
6664
Medium
6668
Wide



6660 Narrow

- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 530 lm
- /2** _ 3000 K - 554 lm
- /3** _ 3500 K - 574 lm

F

CRI >90

Control

6660 __ / __

__ / _ **O** On/ Off (Remote)

__ / _ **D** Push; DALI-2 (Remote)

__ / _ **M** Without driver

__ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum
Lens: PMMA.

Light Source and electronics

1 x LED 5,2 W 300 mA
Constant Current 300 mA
220-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,72 Kg Net weight 0,24 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6664 Medium

- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1** _ 2700 K - 530 lm
- /2** _ 3000 K - 554 lm
- /3** _ 3500 K - 574 lm

Tunable White

- /8** _ (1800 K - 4000 K) 308 lm - 504 lm

F

CRI >90

Control

6664 __ / __

__ / _ **O** Static White + On/ Off (Remote)

__ / _ **D** Static White + Push; DALI-2 (Remote)

__ / _ **M** Static White + Without driver

__ / _ **Z** Static White + Casambi (Remote)

__ / **81** Tunable White + DALI-2 DT8 (Remote)

__ / **8M** Tunable White + Without driver

__ / **8Z** Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220-240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,72 Kg Net weight 0,24 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.



6668 Wide

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1_ 2700 K - 530 lm
 - /2_ 3000 K - 554 lm
 - /3_ 3500 K - 574 lm

- Tunable White**
- /8_ (1800 K - 4000 K)
308 lm - 504 lm



CRI >90

Control

6668 _ _ / _ _

- _ _ / _ **O** Static White +
On/ Off (Remote)
 - _ _ / _ **D** Static White +
Push; DALI-2 (Remote)
 - _ _ / _ **M** Static White +
Without driver
 - _ _ / _ **Z** Static White +
Casambi (Remote)
-
- _ _ / **81** Tunable White +
DALI-2 DT8 (Remote)
 - _ _ / **8M** Tunable White +
Without driver
 - _ _ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220-240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110-240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,72 Kg Net weight 0,24 Kg


Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.



6680
Narrow
6684
Medium
6688
Wide



6680 Narrow

- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 530 lm
- /2** _ 3000 K - 554 lm
- /3** _ 3500 K - 574 lm

F >

CRI >90

Control

- 6680** __ / __
-
- __ / __ **O** On/ Off (Remote)
 - __ / __ **D** Push; DALI-2 (Remote)
 - __ / __ **M** Without driver
 - __ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m³
Gross weight 0,73 Kg Net weight 0,25 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6684 Medium

- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1** _ 2700 K - 530 lm
- /2** _ 3000 K - 554 lm
- /3** _ 3500 K - 574 lm

Tunable White

- /8** _ (1800 K - 4000 K)
308 lm - 504 lm

F >

CRI >90

Control

- 6684** __ / __
-
- __ / __ **O** Static White +
On/ Off (Remote)
 - __ / __ **D** Static White +
Push; DALI-2 (Remote)
 - __ / __ **M** Static White +
Without driver
 - __ / __ **Z** Static White +
Casambi (Remote)
-
- __ / **81** Tunable White +
DALI-2 DT8 (Remote)
 - __ / **8M** Tunable White +
Without driver
 - __ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.



6688 Wide

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1_ 2700 K - 530 lm
/2_ 3000 K - 554 lm
/3_ 3500 K - 574 lm

Tunable White
/8_ (1800 K - 4000 K)
308 lm - 504 lm

F 

CRI >90

- Control**
- 6688** _ _ / _ _
-
- _ _ / _ **O** Static White +
On/ Off (Remote)
 - _ _ / _ **D** Static White +
Push; DALI-2 (Remote)
 - _ _ / _ **M** Static White +
Without driver
 - _ _ / _ **Z** Static White +
Casambi (Remote)
-
- _ _ / **81** Tunable White +
DALI-2 DT8 (Remote)
 - _ _ / **8M** Tunable White +
Without driver
 - _ _ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 350 mA
220-240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110-240V 50/60Hz



Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m³
Gross weight 0,78 Kg Net weight 0,3 Kg


Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

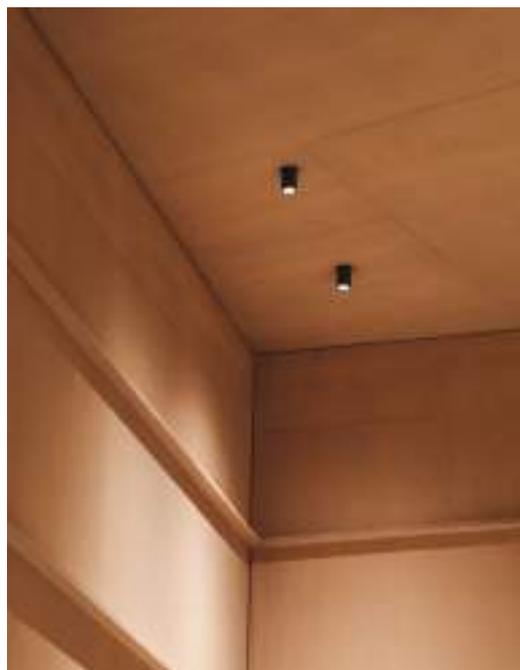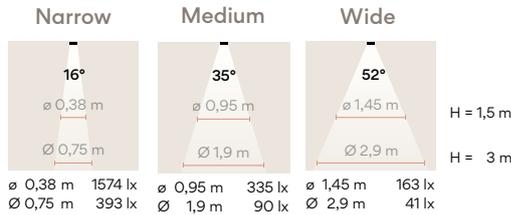

6620
Narrow
6624
Medium



6620 Narrow

- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm

F →

CRI >90

Control

6620 __ / __

__ / __ **O** On/ Off (Remote)

__ / __ **D** Push; DALI-2 (Remote)

__ / __ **M** Without driver

__ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6624 Medium

- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm

F →

CRI >90

Control

6624 __ / __

__ / __ **O** On/ Off (Remote)

__ / __ **D** Push; DALI-2 (Remote)

__ / __ **M** Without driver

__ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,2 Kg


Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6640
Narrow
6644
Medium



6640 Narrow

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm



CRI >90

Control

6640 __ / __

- __ / __ **O** On/ Off (Remote)
- __ / __ **D** Push; DALI-2 (Remote)
- __ / __ **M** Without driver
- __ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,69 Kg Net weight 0,21 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6644 Medium

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 451 lm
- /2** _ 3000 K - 471 lm
- /3** _ 3500 K - 489 lm



CRI >90

Control

6644 __ / __

- __ / __ **O** On/ Off (Remote)
- __ / __ **D** Push; DALI-2 (Remote)
- __ / __ **M** Without driver
- __ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220-240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,69 Kg Net weight 0,21 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6670
Narrow
6674
Medium
6678
Wide

6670 Narrow

- Finishes
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature


- /1** _ 2700 K - 530 lm
- /2** _ 3000 K - 554 lm
- /3** _ 3500 K - 574 lm

F

CRI >90

Control

- 6670** __ / __
-
- __ / __ **O** On/ Off (Remote)
 - __ / __ **D** Push; DALI-2 (Remote)
 - __ / __ **M** Without driver
 - __ / __ **Z** Casambi (Remote)



Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,1 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6674 Medium

- Finishes
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1** _ 2700 K - 530 lm
- /2** _ 3000 K - 554 lm
- /3** _ 3500 K - 574 lm

Tunable White

- /8** _ (1800 K - 4000 K) 308 lm - 504 lm

F

CRI >90

Control

- 6674** __ / __
-
- __ / __ **O** Static White + On/ Off (Remote)
 - __ / __ **D** Static White + Push; DALI-2 (Remote)
 - __ / __ **M** Static White + Without driver
 - __ / __ **Z** Static White + Casambi (Remote)
-
- __ / **81** Tunable White + DALI-2 DT8 (Remote)
 - __ / **8M** Tunable White + Without driver
 - __ / **8Z** Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.



6678 Wide

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1** _ 2700 K - 530 lm
 - /2** _ 3000 K - 554 lm
 - /3** _ 3500 K - 574 lm

- Tunable White**
- /8** _ (1800 K - 4000 K)
308 lm - 504 lm



CRI >90

Control

6678 _ _ / _ _

-
- _ _ / _ **O** Static White +
On/ Off (Remote)
 - _ _ / _ **D** Static White +
Push; DALI-2 (Remote)
 - _ _ / _ **M** Static White +
Without driver
 - _ _ / _ **Z** Static White +
Casambi (Remote)
-
- _ _ / **81** Tunable White +
DALI-2 DT8 (Remote)
 - _ _ / **8M** Tunable White +
Without driver
 - _ _ / **8Z** Tunable White +
Casambi (Remote)
-

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 5,2 W 300 mA
Constant Current 300 mA
220-240V 50/60Hz

Tunable White:

1 x LED 5,5 W 150 mA
Constant Current 150 mA
110-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.



6690
Narrow
6694
Medium
6698
Wide

6690 Narrow

- Finishes
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature


- /1** _ 2700 K - 530 lm
- /2** _ 3000 K - 554 lm
- /3** _ 3500 K - 574 lm

F

CRI >90

Control

- 6690** __ / __
-
- __ / __ **O** On/ Off (Remote)
 - __ / __ **D** Push; DALI-2 (Remote)
 - __ / __ **M** Without driver
 - __ / __ **Z** Casambi (Remote)



Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED PLATE 5,2 W 300 mA
Constant Current 350 mA
220-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point.



6694 Medium

- Finishes
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1** _ 2700 K - 530 lm
- /2** _ 3000 K - 554 lm
- /3** _ 3500 K - 574 lm

Tunable White

- /8** _ (1800 K - 4000 K) 308 lm - 504 lm

F

CRI >90

Control

- 6694** __ / __
-
- __ / __ **O** Static White + On/ Off (Remote)
 - __ / __ **D** Static White + Push; DALI-2 (Remote)
 - __ / __ **M** Static White + Without driver
 - __ / __ **Z** Static White + Casambi (Remote)
-
- __ / **81** Tunable White + DALI-2 DT8 (Remote)
 - __ / **8M** Tunable White + Without driver
 - __ / **8Z** Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220-240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.



6698 Wide

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1_ 2700 K - 530 lm
 - /2_ 3000 K - 554 lm
 - /3_ 3500 K - 574 lm

- Tunable White**
- /8_ (1800 K - 4000 K)
308 lm - 504 lm

F 
CRI >90

Control

6698 _ _ / _ _

- _ _ / _ **O** Static White +
On/ Off (Remote)
 - _ _ / _ **D** Static White +
Push; DALI-2 (Remote)
 - _ _ / _ **M** Static White +
Without driver
 - _ _ / _ **Z** Static White +
Casambi (Remote)
-
- _ _ / **81** Tunable White +
DALI-2 DT8 (Remote)
 - _ _ / **8M** Tunable White +
Without driver
 - _ _ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220-240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110-240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,78 Kg Net weight 0,3 Kg


Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

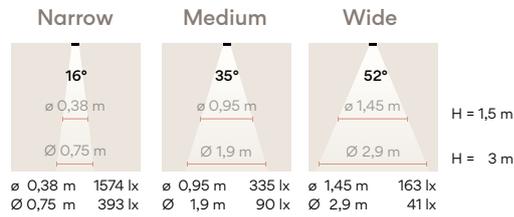

6700
 Medium
6702
 Wide



6700 Medium

- Finishes**
 ● **11/** __ Black
 (NCS S 8500-N)
 ● **24/** __ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
 /1 _ 2700 K - 1256 lm
 /2 _ 3000 K - 1313 lm
 /3 _ 3500 K - 1360 lm

- Tunable White**
 /8 _ (1800 K - 4000 K)
 571 lm - 895 lm

F
 CRI >90

Control

- 6700** __ / __
 __ / __ **D** Static White +
 Push; DALI-2 (Remote)
 __ / __ **Z** Static White +
 Casambi (Remote)
 __ / **81** Tunable White +
 DALI-2 DT8 (Remote)
 __ / **8Z** Tunable White +
 Casambi (Remote)

Materials

Diffuser: PC- Polycarbonate.
 Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 12,4 W 700 mA
 Constant Current 700 mA
 220-240V 50/60Hz

Tunable White:
 1 x LED 8,9 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
 Vol 0,0176 m³
 Gross weight 1,7 Kg Net weight 1,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.



6702 Wide

- Finishes**
 ● **11/** __ Black
 (NCS S 8500-N)
 ● **24/** __ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
 /1 _ 2700 K - 1256 lm
 /2 _ 3000 K - 1313 lm
 /3 _ 3500 K - 1360 lm

- Tunable White**
 /8 _ (1800 K - 4000 K)
 571 lm - 895 lm

F
 CRI >90

Control

- 6702** __ / __
 __ / __ **D** Static White +
 Push; DALI-2 (Remote)
 __ / __ **Z** Static White +
 Casambi (Remote)
 __ / **81** Tunable White +
 DALI-2 DT8 (Remote)
 __ / **8Z** Tunable White +
 Casambi (Remote)

Materials

Diffuser: PC- Polycarbonate.
 Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 12,4 W 700 mA
 Constant Current 700 mA
 220-240V 50/60Hz


Tunable White:
 1 x LED 8,9 W 500 mA
 Constant Current 500 mA
 110-240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
 Vol 0,0176 m³
 Gross weight 1,7 Kg Net weight 1,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.



Sticks

Design by Arik Levy

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.




You can chose the desired composition through one of the following three options:

A - Choose among pre-designed layouts the one that fits with your project and order it directly (see page 466).



B - Select one composition on vibia.com among multiple applications in spaces, and adjust it to your project by modifying:

- + Length of the sticks.
- + Position of each stick in the space.
- + Colour temperature and dimming.
- + Installation type.

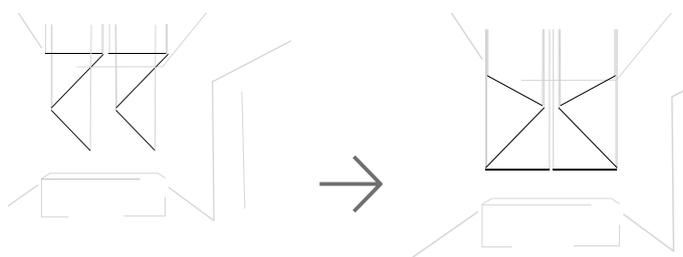

C - Create your configuration on vibia.com from scratch in three easy steps, without sketches.

1

Choose the location for your electrical connection point



2

Add connectable Sticks up to 6.5 meters



3

Configure
+ Colour temperature
+ Dimming control
+ Installation type
+ Pendant height




Technical Specifications

(see page 474)


The Sticks collection has three sizes: 1.5 m, 2 m, or 3 m, and they can be connected one to each other to a total maximum length of 6.5 meters per electrical connection.

Wall-Wall / Ceiling-Ceiling





7306
Stick 300 x 3 x 2 cm

Wall-Wall (corner) / Wall-Ceiling




7336
Stick 306 x 3 x 2 cm


Wall-Pendant

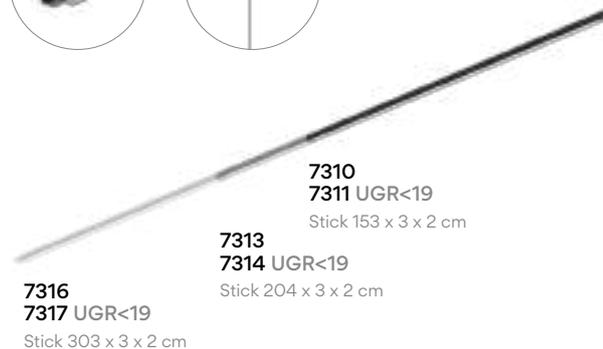

Pendant-Pendant

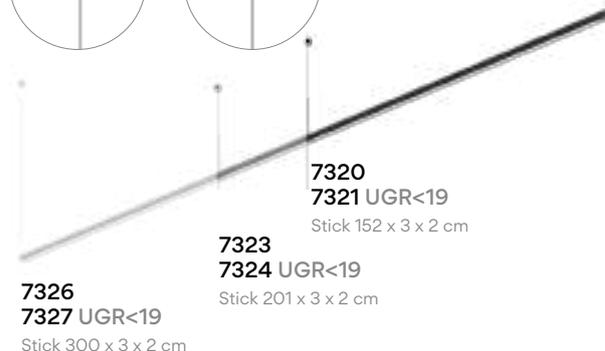

Pendant




Floor-Wall



Sticks Connectable

Next sketches are composed by one or more compositions

Pendant / Ceiling

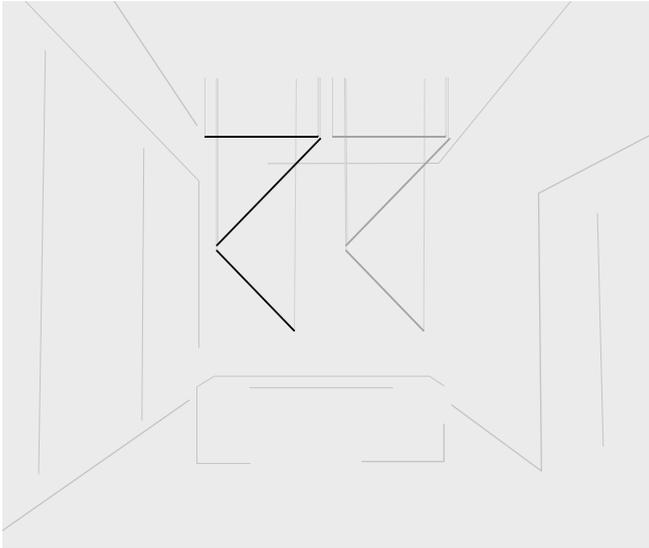


ST1001

Sketch composed by two identical compositions.

Each composition:

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

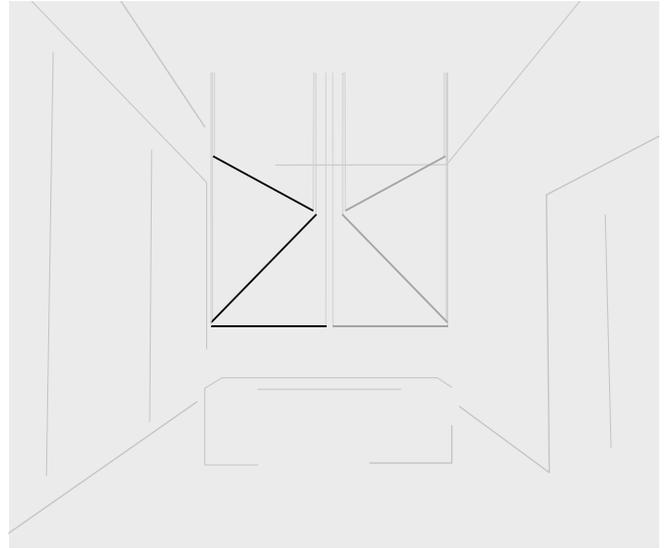


ST1005

Sketch composed by two identical compositions.

Each composition:

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

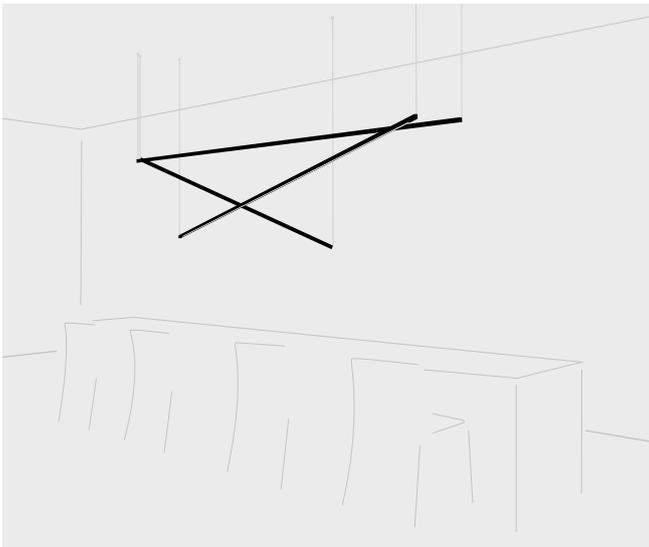

ST1015

Sketch composed by two compositions.

Composition 1:

2 Sticks: 1 x 150 cm, 1 x 300 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Built-in disc S canopy. 1-10V.

Composition 2:

1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Built-in disc S canopy. 1-10V.




ST1021

Sketch composed by four identical compositions.

Each composition:

2 Sticks: 2 x 200 cm. Total 4 m.
LED 3500 K. 9496 lm. 140,8 W.
Built-in disc S canopy. 1-10V.

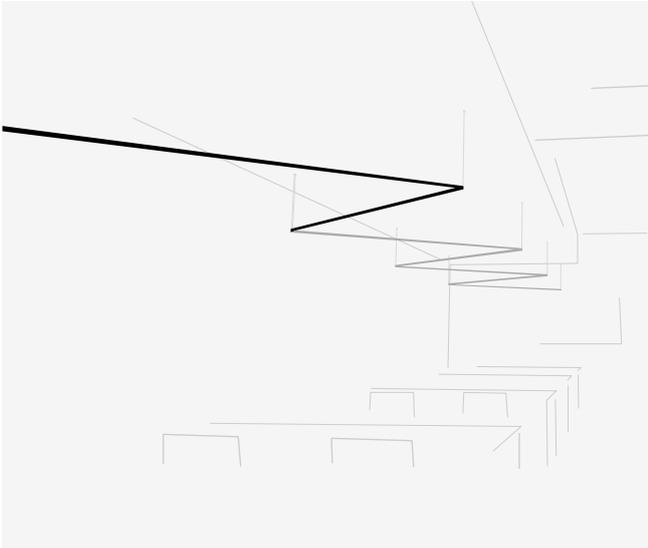


ST1025

Sketch composed by four identical compositions.

Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.
 LED 3500 K. 14244 lm. 105,6 W.
 Built-in disc S canopy. 1-10V.

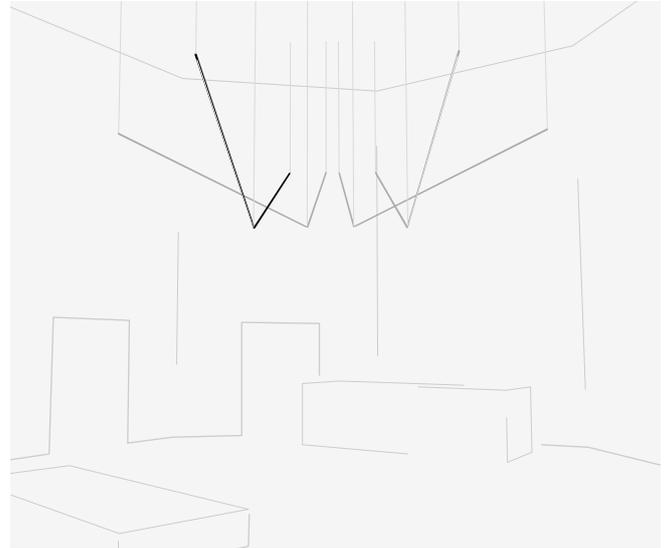


ST1035

Sketch composed by four identical compositions.

Each composition:

2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
 LED 3500 K. 10683 lm. 79,2 W.
 Built-in disc S canopy. 1-10V.

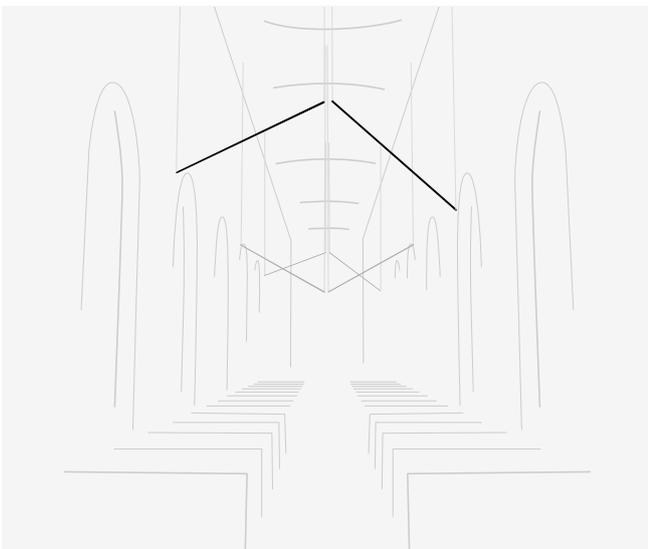


ST1041

Sketch composed by three identical compositions.

Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.
 LED 3500 K. 14244 lm. 105,6 W.
 Built-in disc S canopy. 1-10V.

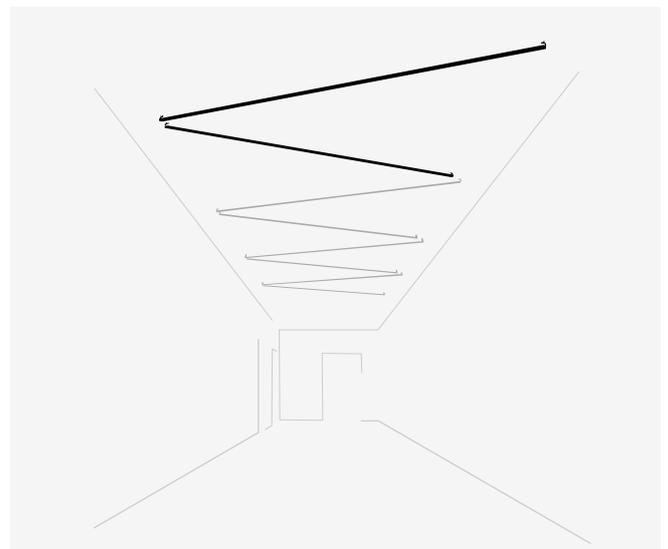

ST1085

Sketch composed by four identical compositions.


Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.
 LED 3500 K. 14244 lm. 105,6 W.
 Remote driver Built-in Micro. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions


Some sticks are attached to the Wall

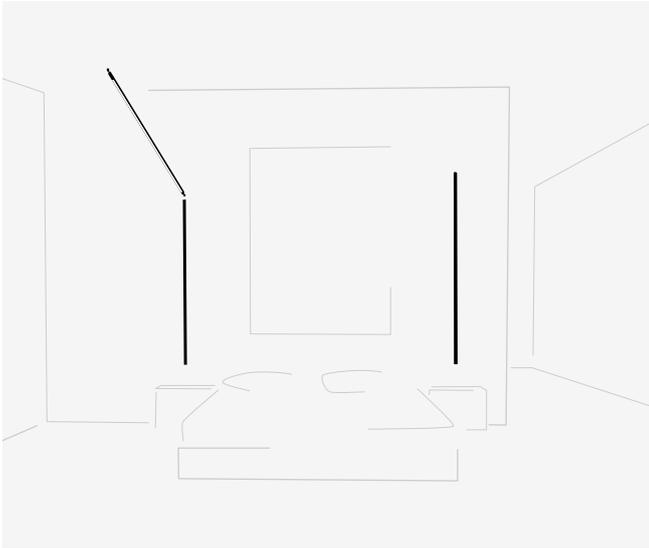

STI051
Sketch composed by two compositions.


Composition 1:
2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.

Composition 2:
1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4346 lm. 35,2 W.
Floor base & plug. Push.

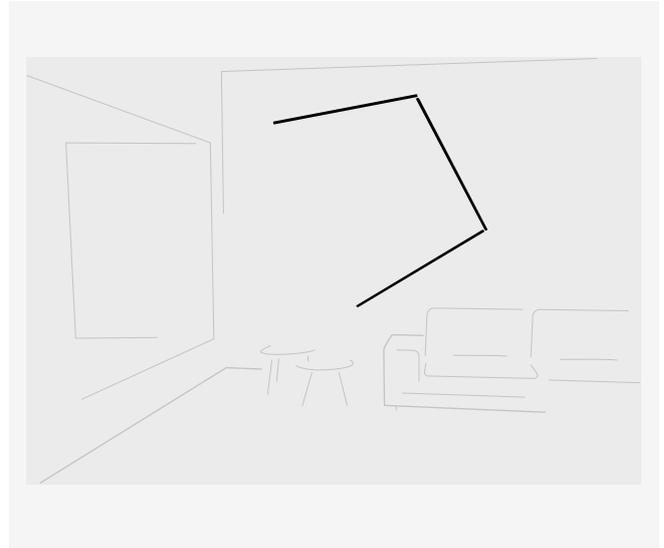


STI055
Sketch composed by only one composition.

3 Sticks: 3 x 150 cm. Total 4,5 m.
LED 2700 K. 9780 lm. 79,2 W.
Floor base & plug. Push.

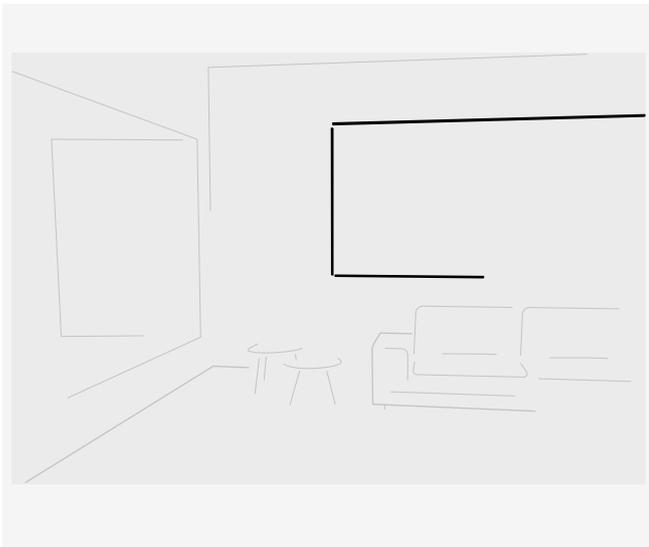


STI061
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 2700 K. 13039 lm. 105,6 W.
Floor base & plug. Push.

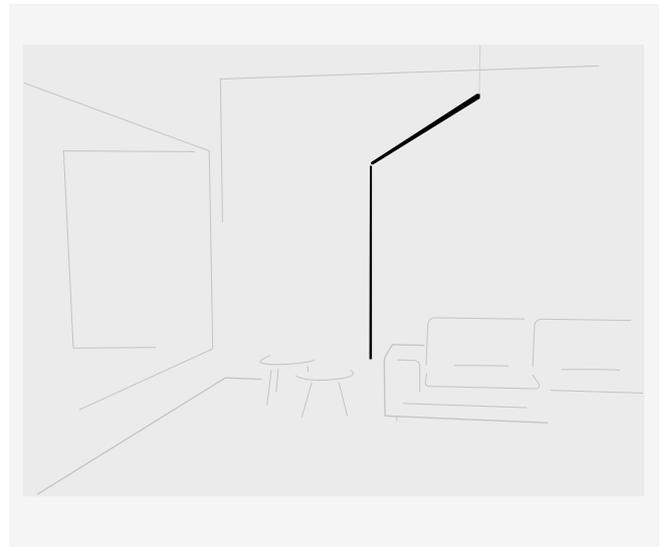

STI065
Sketch composed by only one composition.


2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.

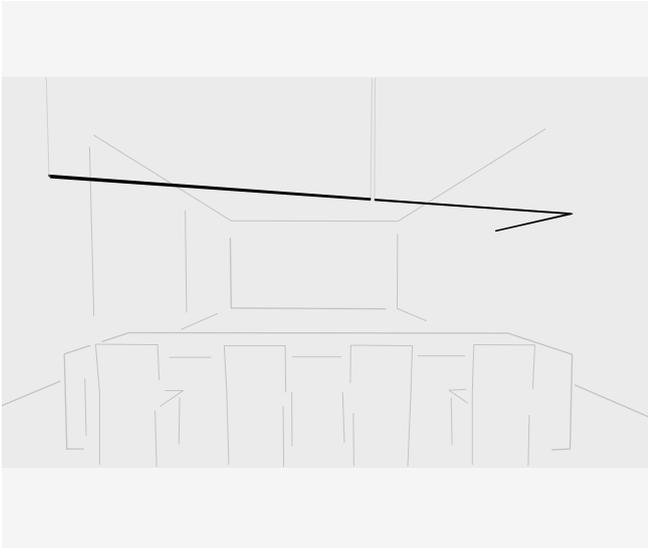

ST1071

Sketch composed by only one composition.


3 Sticks: 1 x 150 cm, 2 x 200 cm. Total 5,5 m.
 LED 2700 K. 11952 lm. 96,8 W.
 Floor base & plug. Push.

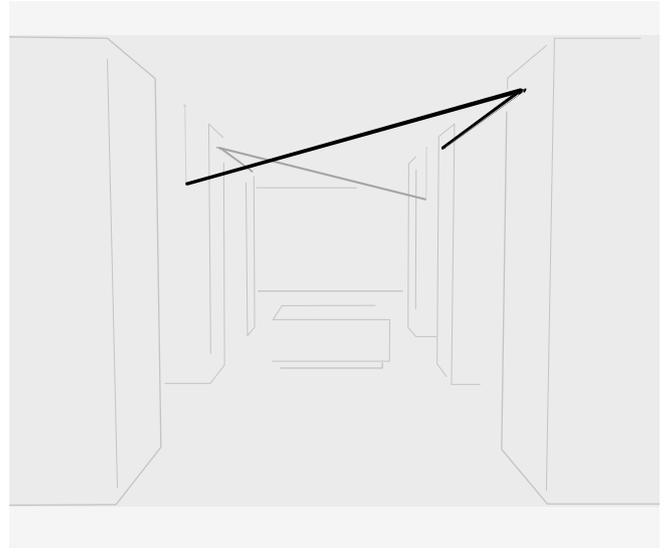

ST1075

Sketch composed by two identical compositions.

Each composition:
 2 Sticks: 2 x 300 cm. Total 6 m.
 LED 3500 K. 14244 lm. 105,6 W.
 Remote driver Built-in Micro. 1-10V.

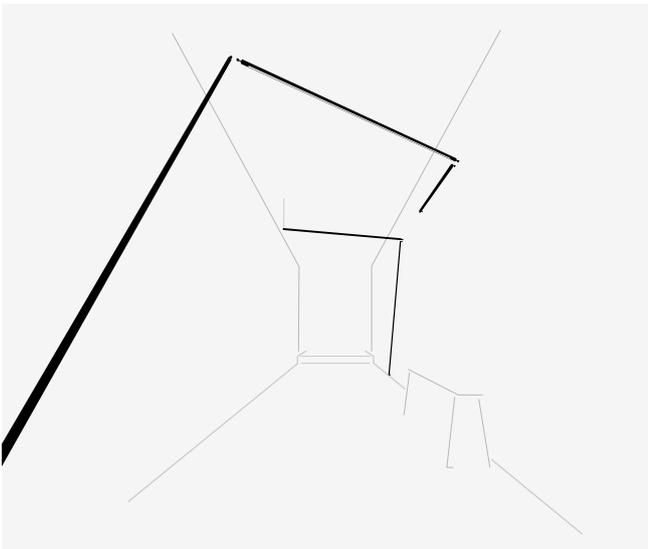


ST1081

Sketch composed by two compositions.

Composition 1:
 3 Sticks: 1 x 150 cm, 1 x 200 cm, 1 x 300 cm. Total 6,5 m.
 LED 3500 K. 15431 lm. 114,4 W.
 Remote driver Built-in Micro. 1-10V.

Composition 2:
 2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
 LED 3500 K. 11870 lm. 88 W.
 Remote driver Built-in Micro. 1-10V.

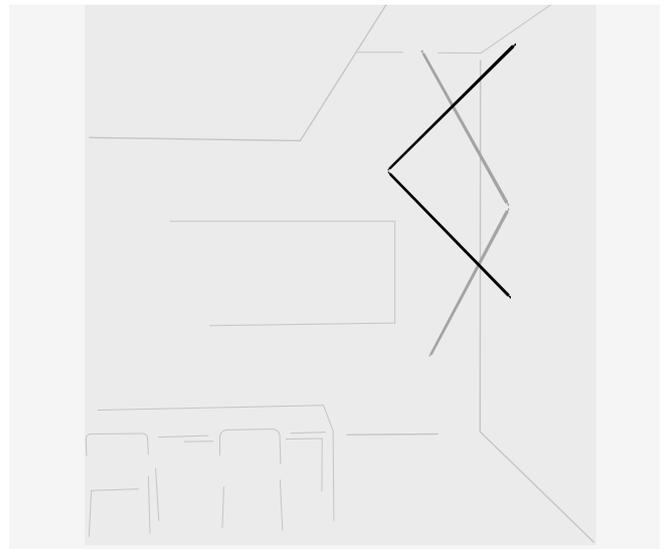

ST1091


Sketch composed by two identical compositions.

Each composition:
 2 Sticks: 2 x 200 cm. Total 4 m.
 LED 2700 K. 8692 lm. 70,4 W.
 Remote driver Built-in Micro. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions

Some sticks are attached to the Wall

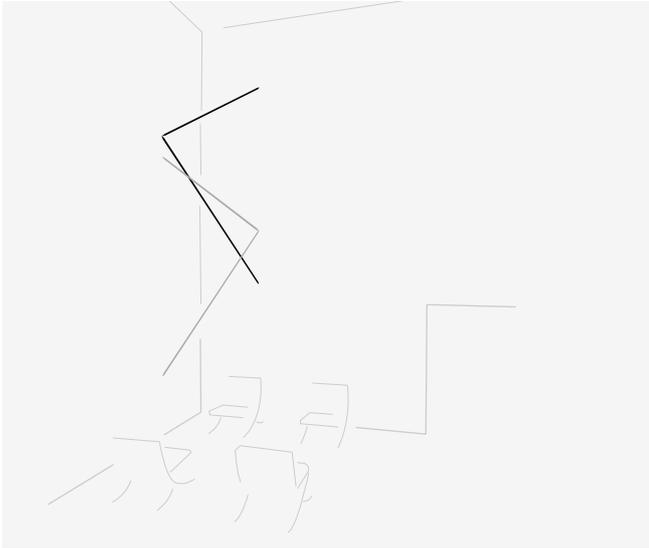

ST1095

Sketch composed by two identical compositions.

Each composition:

2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.



ST1101


Sketch composed by two compositions.

Composition 1:

2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:


1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Remote driver Built-in Micro. 1-10V.

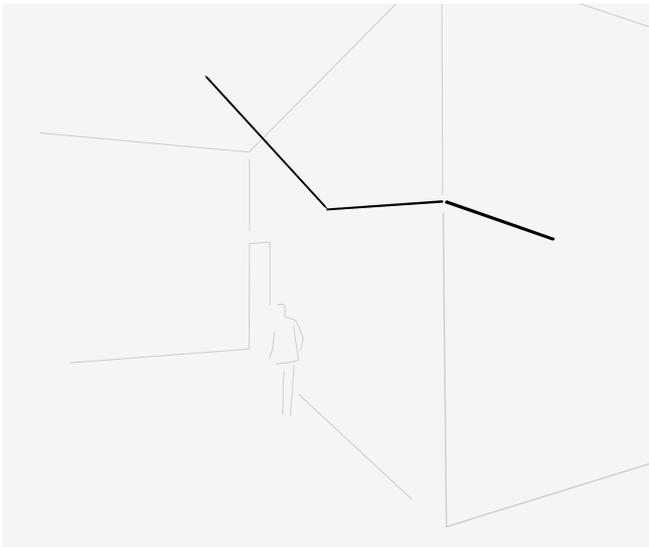

ST1105

Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Floor base & plug. Push.

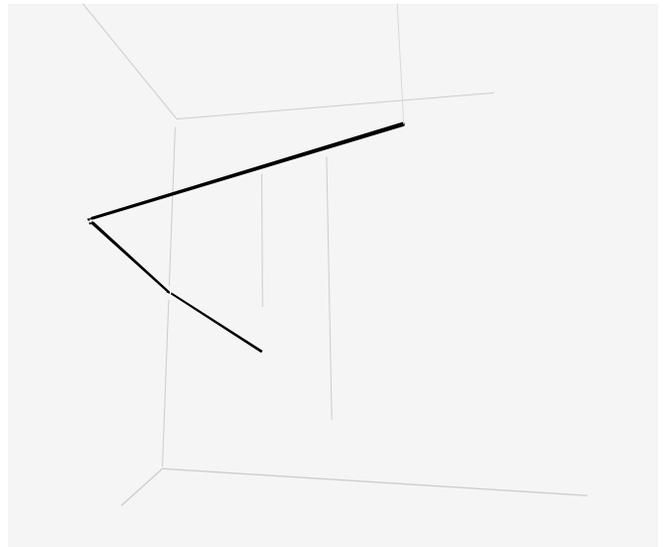

ST1111

Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.




ST115

Sketch composed by three identical compositions.

Each composition:

2 Sticks: 2 x 200 cm. Total 4 m.
 LED 3500 K. 9496 lm. 70,4 W.
 Built-in disc S canopy. 1-10V.

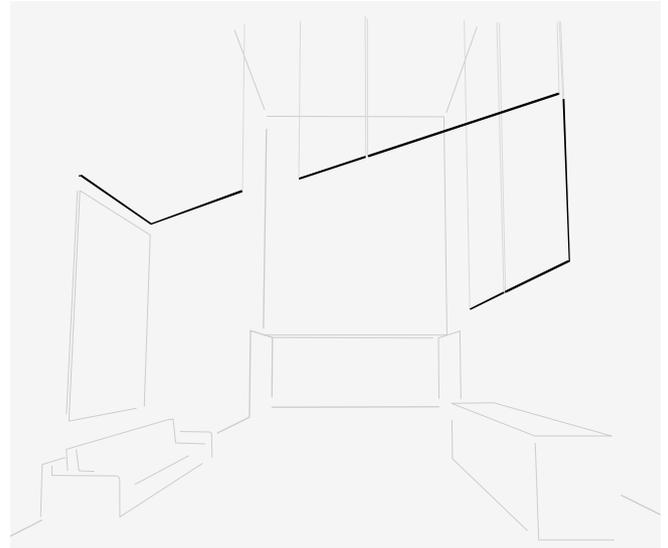

ST131

Sketch composed by four compositions.

Composition 1:

2 Sticks: 2 x 300 cm. Total 6 m.
 LED 3500 K. 14244 lm. 105,6 W.
 Remote driver Built-in Micro. 1-10V.

Composition 2:


1 Stick: 1 x 150 cm. Total 1,5 m.
 LED 3500 K. 3561 lm. 26,4 W.
 Remote driver Built-in Micro. 1-10V.

Composition 3:

2 Sticks: 2 x 300 cm. Total 6 m.
 LED 3500 K. 14244 lm. 105,6 W.
 Remote driver Built-in Micro. 1-10V.

Composition 4:

2 Sticks: 2 x 300 cm. Total 6 m.
 LED 3500 K. 14244 lm. 105,6 W.
 Remote driver Built-in Micro. 1-10V.

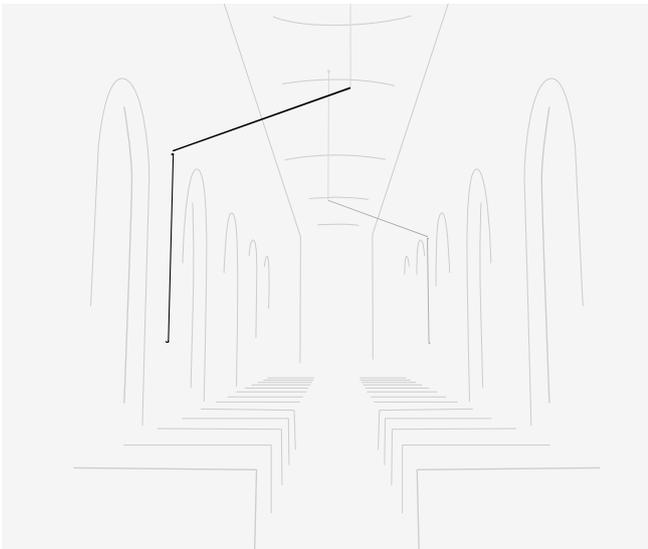

ST141

Sketch composed by two identical compositions.


Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.
 LED 3500 K. 14244 lm. 105,6 W.
 Built-in disc S canopy. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions

Some sticks are on the Floor

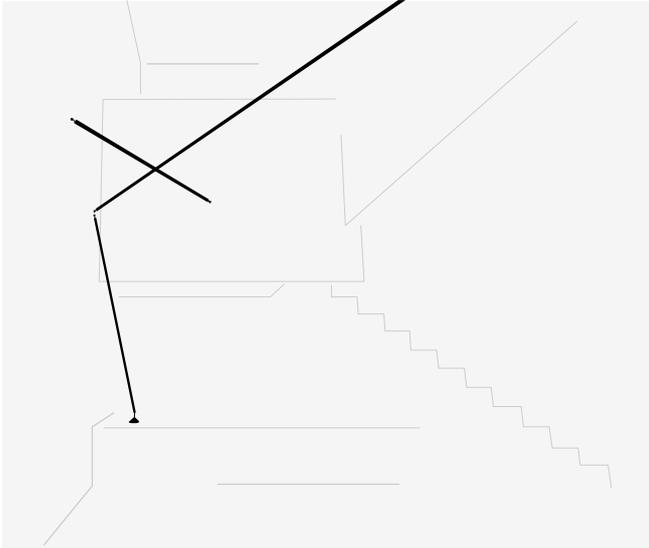

ST1151


Sketch composed by two compositions.

Composition 1:

1 Stick: 1 x 150 cm. Total 1,5 m.
LED 2700 K. 3260 lm. 26,4 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:

2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

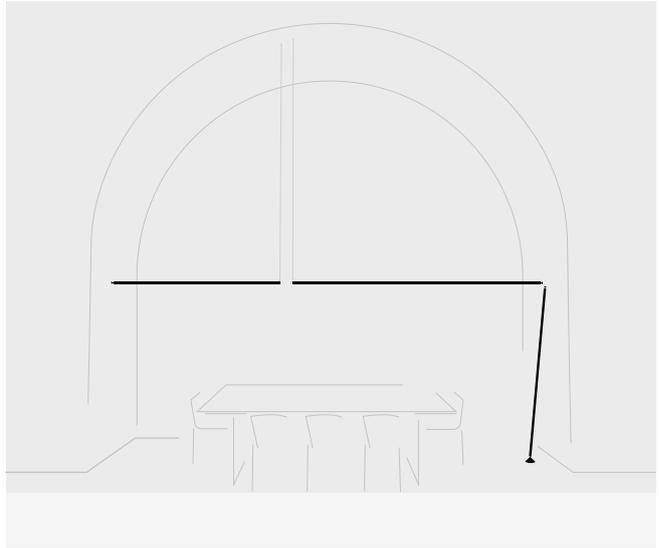

ST1161

Sketch composed by two compositions.

Composition 1:

1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4336 lm. 35,2 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:

2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver Built-in Micro. 1-10V.



ST1171


Sketch composed by two compositions.

Composition 1:

3 Sticks: 3 x 200 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Surface canopy. 1-10V.

Composition 2:

2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Surface canopy. 1-10V.

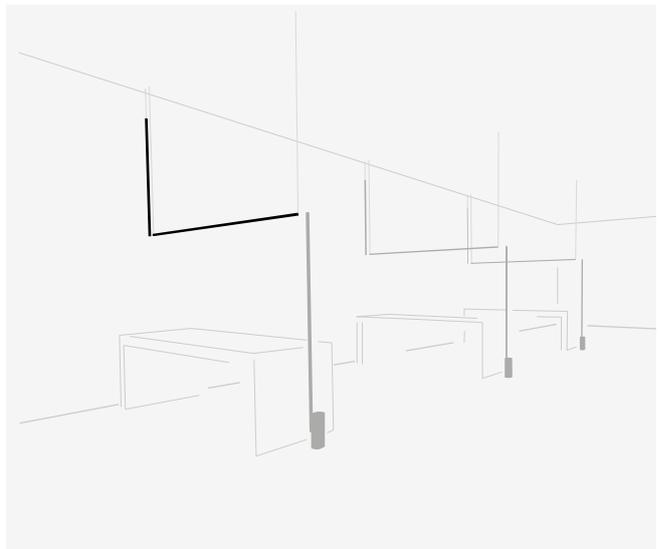


ST1175

Sketch composed by three identical compositions.

Each composition:

2 Sticks: 1 x 150 cm, 1 x 200 cm. Total 3,5 m.
LED 3500 K. 8309 lm. 61,6 W.
Surface canopy. 1-10V.

Some sticks are attached to the Wall

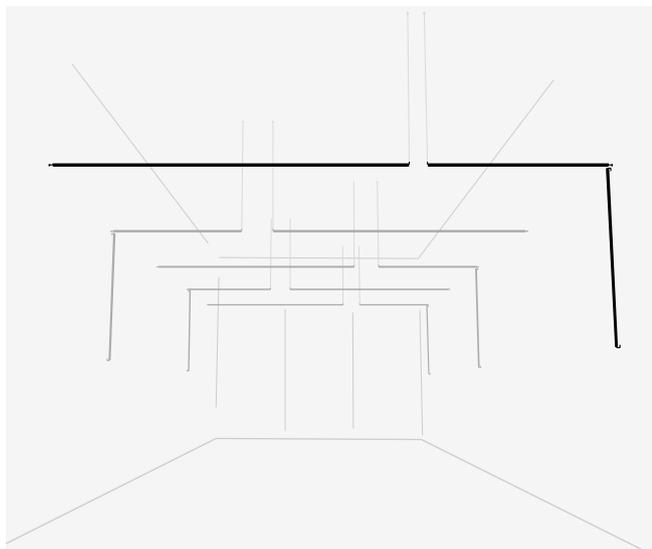

ST1145

Sketch composed by five identical compositions.

Each composition:

3 Sticks: 1 x 300 cm, 2 x 150 cm . Total 6 m.

LED 3500 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V

Each project is unique.
Visit vibia.com and chose among
multiple compositions designed
and adapted to your project needs.

Personalize your own Sticks composition
quick and easy at vibia.com.

Sticks Connectable

Elements to be configurated

Wall-Wall / Ceiling-Ceiling
Wall-Wall (corner) / Wall-Ceiling
Wall-Pendant
Pendant-Pendant
Pendant-Ceiling
Pendant

Sticks 1,5 m.

7300 7310 7311 7320 7321 7330 7350

Temperature Colour

- /1 _ 2700 K  CRI >90 3260 lm 123 lm/W
/2 _ 3000 K  CRI >90 3510 lm 133 lm/W
/3 _ 3500 K  CRI >90 3480 lm 132 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 0,9 Kg.

Sticks 2 m.

7303 7313 7314 7323 7324 7333 7353

Temperature Colour

- /1 _ 2700 K  CRI >90 4346 lm 123 lm/W
/2 _ 3000 K  CRI >90 4680 lm 133 lm/W
/3 _ 3500 K  CRI >90 4640 lm 132 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,2 Kg.

Sticks 3 m.

7306 7316 7317 7326 7327 7336 7356

Temperature Colour

- /1 _ 2700 K  CRI >90 6519 lm 123 lm/W
/2 _ 3000 K  CRI >90 7020 lm 133 lm/W
/3 _ 3500 K  CRI >90 6960 lm 132 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 1,8 Kg.

Sticks: Aluminum.

Diffuser: PC- Polycarbonate.

Driver and Dimming depends on selected installation accessory (see page 475).

Suspension cables up to 3m. for Wall - Pendant and Pendant-Pendant.

Personalisation options available

- Extra cable length for Wall - Pendant and Pendant - Pendant.

Min. quantity, upcharge and extra lead time apply.

11 Black

(NCS S 8500-N)



Horizontal pendant version with a UGR index <19 available.

Floor-Wall

Sticks 1,5 m.

7340

Temperature Colour

- /1 _ 2700 K  CRI >90 3260 lm 123 lm/W
/2 _ 3000 K  CRI >90 2644 lm 100,15 lm/W
/3 _ 3500 K  CRI >90 3480 lm 132 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 1,5 Kg.

Sticks 2 m.

7343

Temperature Colour

- /1 _ 2700 K  CRI >90 4346 lm 123 lm/W
/2 _ 3000 K  CRI >90 2644 lm 100,15 lm/W
/3 _ 3500 K  CRI >90 4640 lm 132 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,8 Kg.

Sticks 3 m.

7346

Temperature Colour

- /1 _ 2700 K  CRI >90 6519 lm 123 lm/W
/2 _ 3000 K  CRI >90 5288 lm 100,15 lm/W
/3 _ 3500 K  CRI >90 6960 lm 132 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 2,4 Kg.

Sticks: Aluminum.

Diffuser: PC- Polycarbonate.

Driver and Dimming depends on selected installation accessory (see page 475).

11 Black

(NCS S 8500-N)

Electrical connection options



Floor base & plug




Surface canopy



Built-in disc S




Remote driver Built-in Micro



Floor base & plug
ACST000001 ACST000002
Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: Push.

Materials
Body: Steel.
Packaging
1 Box.
0,16 x 0,16 x 0,4 m.
Vol. 0,01 m³.
Gross weight 8,5 Kg.
Net weight 7 Kg.


11 Black
(NCS S 8500-N)



Surface canopy
ACST000003 ACST000004
Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.
Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.
Packaging
1 Box.
0,50 x 0,25 x 0,25 m.
Vol. 0,03 m³.
Gross weight 2,9 Kg.
Net weight 2,5 Kg.


11 Black
(NCS S 8500-N)



Built-in disc S
ACST000005 ACST000006
Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.
Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.
Packaging
1 Box.
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)



Remote driver Built-in Micro
ACST000007 ACST000008
Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.
Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Aluminum.
Packaging
1 Box.
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)




Sticks Solo


Design by Arik Levy

A pure solution for a minimalist interior, Sticks Solo features a range of free-standing, arranged floor to wall, connecting two planes of the same space or horizontal pendant of various lengths and incorporates a range of electrical connection options for seamless integration with the surrounding architecture.

Floor

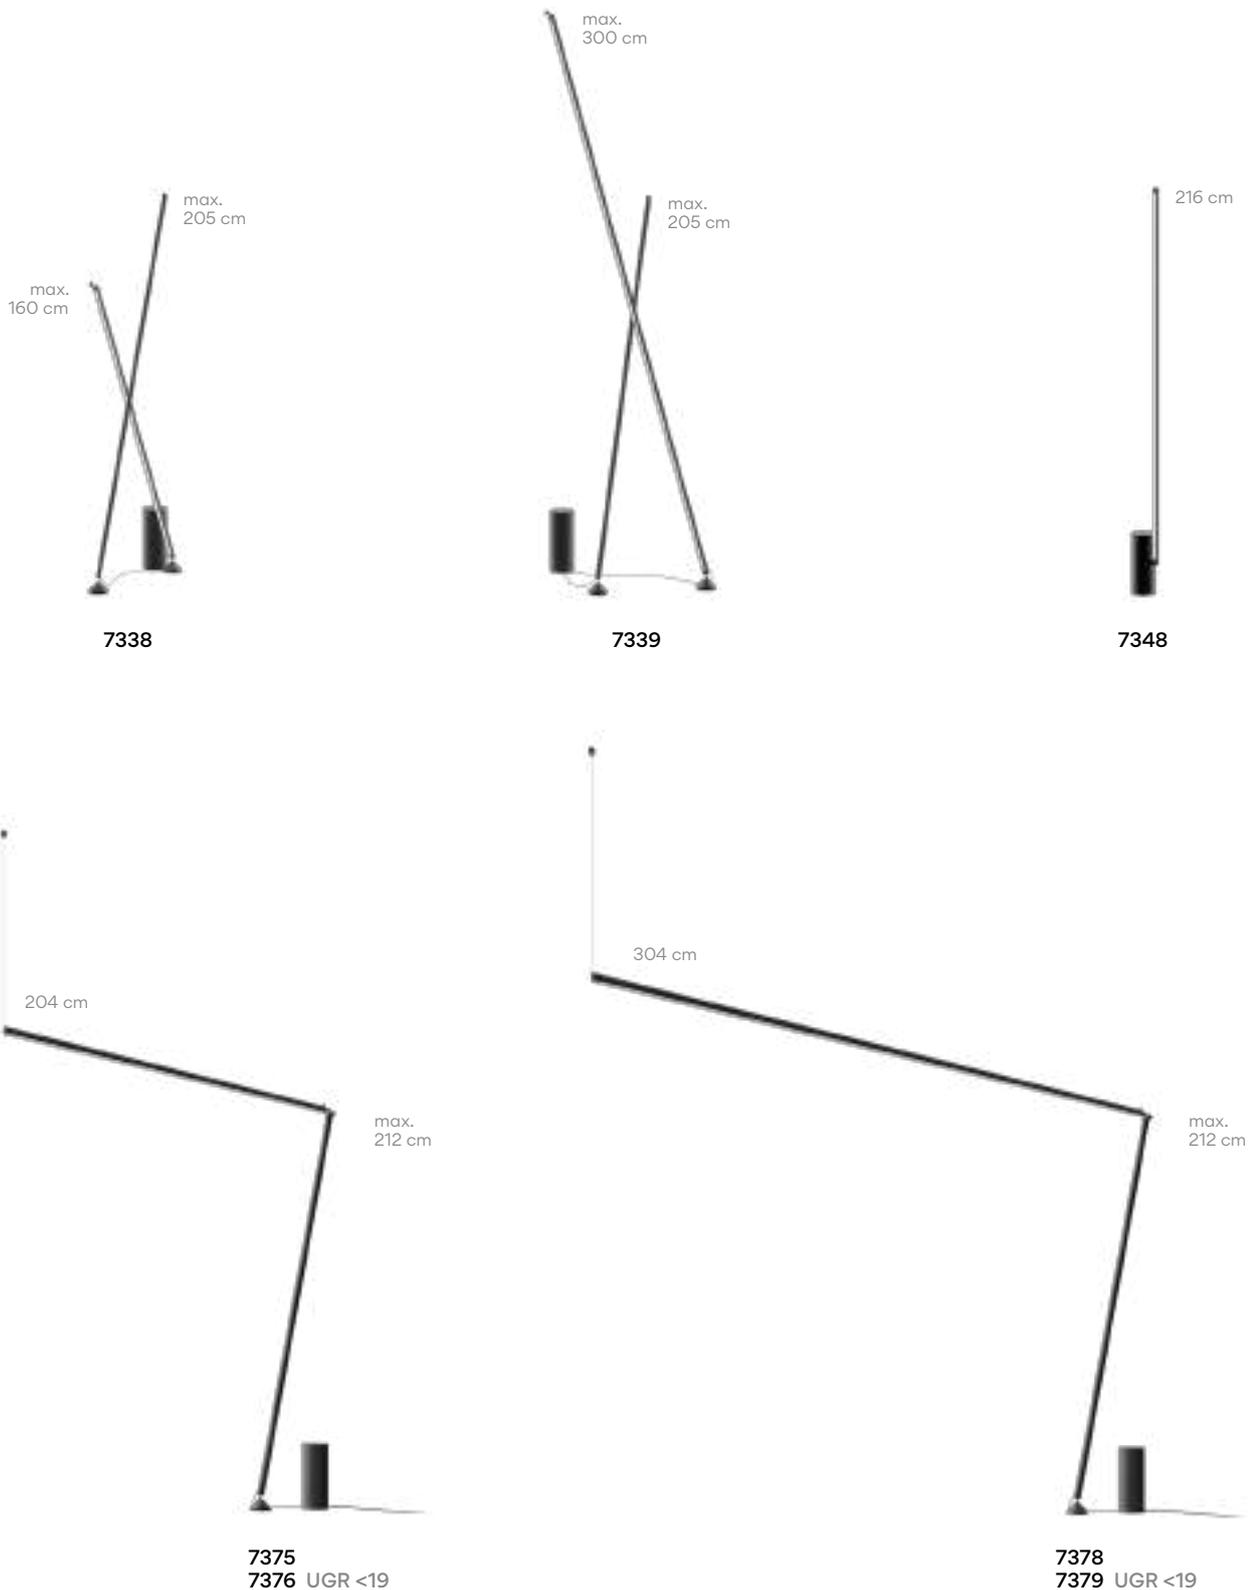

7338

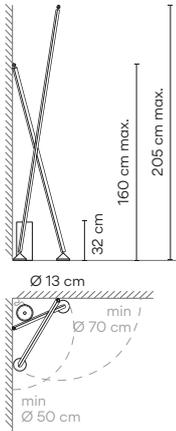

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 7604 lm
 /2 _ 3000 K - 8192 lm
 /3 _ 3500 K - 8286 lm

F

CRI >90

Control
 7338 11 / _ 5 Push


Materials
 Sticks: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics
 1 x LED STRIP 26,4 W 24V
 1 x LED STRIP 35,2 W 24V
 Constant Voltage 24V
 200~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,0414 m³
 Gross weight 14,2 Kg Net weight 9,7 Kg

LED IP20 CE UK ENE Dimmer

7339

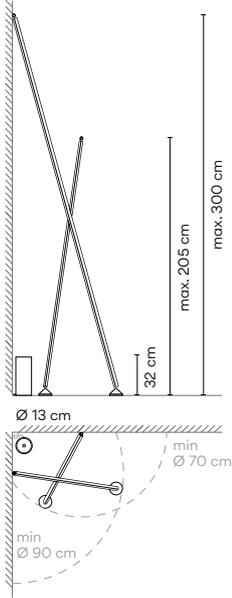

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 10868 lm
 /2 _ 3000 K - 11704 lm
 /3 _ 3500 K - 11836 lm

F

CRI >90

Control
 7339 11 / _ 5 Push

Materials
 Sticks: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics
 1 x LED STRIP 35,2 W 24V
 1 x LED STRIP 52,8 W 24V
 Constant Voltage 24V
 200~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,057 m³
 Gross weight 16,6 Kg Net weight 10,6 Kg

LED IP20 CE UK ENE Dimmer

7348



Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 4346 lm
 /2 _ 3000 K - 4681 lm
 /3 _ 3500 K - 4734 lm

F

CRI >90

Control
 7348 11 / _ 5 Push


Materials
 Sticks: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics
 1 x LED STRIP 35,2 W 24V
 Constant Voltage 24V
 200~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,0166 m³
 Gross weight 8,8 Kg Net weight 8,4 Kg

LED IP20 CE UK ENE Dimmer

7375
7376
UGR <19

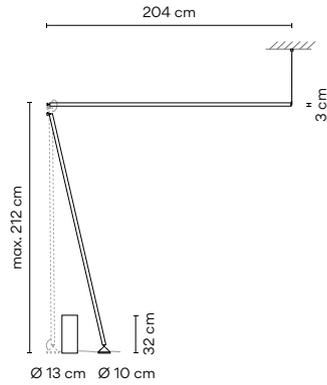

7375

Finishes

- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 8694 lm
- /2 _ 3000 K - 9363 lm
- /3 _ 3500 K - 9469 lm



CRI >90

Control

7375 11 / _ 5 Push

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 35,2W 24V
Constant voltage 24V
200-240Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25
Vol 0,035 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 13,6 Kg Net weight 9,4 Kg



7376

Finishes

- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 8694 lm
- /2 _ 3000 K - 9363 lm
- /3 _ 3500 K - 9469 lm



CRI >90

Control

7376 11 / _ 5 Push

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics


2 x LED STRIP 35,2W 24V
Constant voltage 24V
200-240Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25
Vol 0,035 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 13,6 Kg Net weight 9,4 Kg



7378
7379
 UGR <19

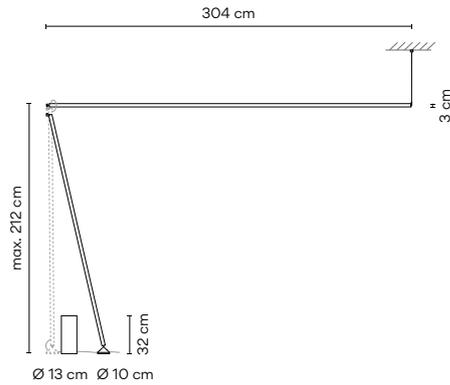

7378

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 10868 lm
 /2 _ 3000 K - 11704 lm
 /3 _ 3500 K - 11836 lm

Control
 7378 11/ _ 5 Push

F
 CRI >90

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED STRIP 35,2W 24V
 1 x LED STRIP 52,8W 24V
 Constant voltage 24V
 200~240Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 3,25
 Vol 0,05 m³
 1 Tube 0,16 x 0,16 x 0,40
 Vol 0,01 m³
 Gross weight 15,7 Kg Net weight 9,4 Kg

LED IP20 CE UK ENEC Dimmer

7379

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 10868 lm
 /2 _ 3000 K - 11704 lm
 /3 _ 3500 K - 11836 lm

Control
 7379 11/ _ 5 Push

F
 CRI >90

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED STRIP 35,2W 24V
 1 x LED STRIP 52,8W 24V
 Constant voltage 24V
 200~240Vac 50/60Hz

Packaging


1 Tube 0,12 x 0,12 x 3,25
 Vol 0,05 m³
 1 Tube 0,16 x 0,16 x 0,40
 Vol 0,01 m³
 Gross weight 15,7 Kg Net weight 9,4 Kg

LED IP20 CE UK ENEC Dimmer

Pendant



7360
7361 UGR <19
152 x 2 x 3 cm

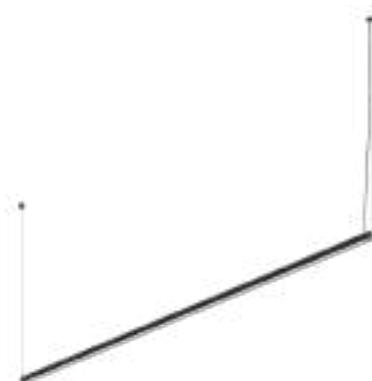

7363
7364 UGR <19
201 x 2 x 3 cm




7365
7366 UGR <19
304 x 2 x 3 cm



7368
7369 UGR <19
402 x 2 x 3 cm

7360
 7361
 UGR <19

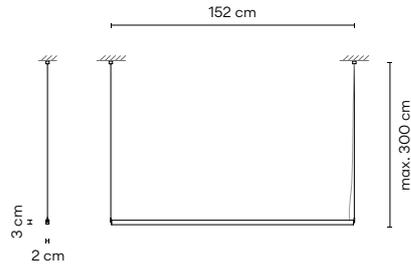

7360

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 3260 lm
 /2 _ 3000 K - 3511 lm
 /3 _ 3500 K - 3551 lm
 F →
 CRI >90

Control

7360 11 / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

Select Electrical connection



Surface Built-in Disc S Remote Micro Remote XXS

_10 Surface
 _24 Built-in Disc S
 _31 Remote Micro
 _32 Remote XXS

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics
 1 x LED PLATE 26,4 W 24V
 Constant voltage 24V
 90-305Vac 50/60Hz

Packaging

1 Tube 0,07 x 0,07 x 1,60 m
 Vol 0,007 m³
 1 Box 0,12 x 0,12 x 0,48 m
 Vol 0,007 m³
 Gross weight 4,6 Kg Net weight 3,4 Kg

Notes

7360 _ _ / _ 1: DALI-2 **Multi-volt**
 7360 _ _ / _ 3: 1-10V **Multi-volt**

LED IP20 CE UK ENEC Dimmer

7361

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 3260 lm
 /2 _ 3000 K - 3511 lm
 /3 _ 3500 K - 3551 lm
 F →
 CRI >90

Control

7361 11 / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

Select Electrical connection



Surface Built-in Disc S Remote Micro Remote XXS

_10 Surface
 _24 Built-in Disc S
 _31 Remote Micro
 _32 Remote XXS

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics
 1 x LED PLATE 26,4 W 24V
 Constant voltage 24V
 90-305Vac 50/60Hz

Packaging

1 Tube 0,07 x 0,07 x 1,60 m
 Vol 0,007 m³
 1 Box 0,12 x 0,12 x 0,48 m
 Vol 0,007 m³
 Gross weight 4,6 Kg Net weight 3,4 Kg

Notes


7361 _ _ / _ 1: DALI-2 **Multi-volt**
 7361 _ _ / _ 3: 1-10V **Multi-volt**

LED IP20 CE UK ENEC Dimmer

7363

7364

UGR <19

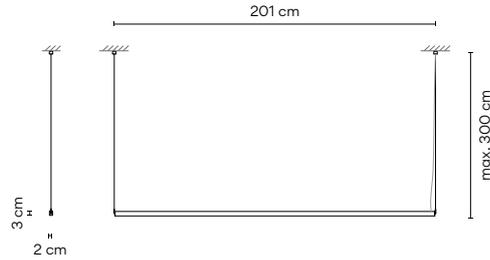

7363

Finishes

- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 4347 lm
- /2 _ 3000 K - 4682 lm
- /3 _ 3500 K - 4734 lm



CRI >90

Control

7363 11 / _ _

_ _ / _ 1 DALI-2

_ _ / _ 3 1-10V

_ _ / _ Z Casambi

Select Electrical connection



Surface

Built-in Disc S

Remote Micro

Remote XXS

- _10 Surface
- _24 Built-in Disc S
- _31 Remote Micro
- _32 Remote XXS

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED PLATE 35,2 W 24V
Constant voltage 24V
90-305Vac 50/60Hz

Packaging

1 Tube 0,07 x 0,07 x 2,240 m
Vol 0,011 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 5,3 Kg Net weight 3,7 Kg

Notes

7363 _ _ / _ 1: DALI-2 **Multi-volt**

7363 _ _ / _ 3: 1-10V **Multi-volt**



7364

Finishes

- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 4347 lm
- /2 _ 3000 K - 4682 lm
- /3 _ 3500 K - 4734 lm



CRI >90

Control

7364 11 / _ _

_ _ / _ 1 DALI-2

_ _ / _ 3 1-10V

_ _ / _ Z Casambi

Select Electrical connection



Surface

Built-in Disc S

Remote Micro

Remote XXS

- _10 Surface
- _24 Built-in Disc S
- _31 Remote Micro
- _32 Remote XXS

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED PLATE 35,2 W 24V
Constant voltage 24V
90-305Vac 50/60Hz

Packaging

1 Tube 0,07 x 0,07 x 2,240 m
Vol 0,011 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 5,3 Kg Net weight 3,7 Kg


Notes

7364 _ _ / _ 1: DALI-2 **Multi-volt**

7364 _ _ / _ 3: 1-10V **Multi-volt**



7365
 7366
 UGR <19

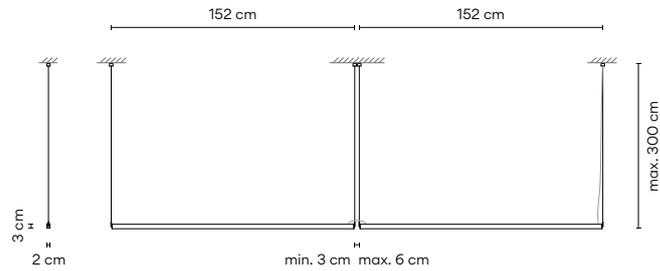

7365

Finishes

- 11/ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 6521 lm
- /2 _ 3000 K - 7022 lm
- /3 _ 3500 K - 7102 lm



CRI >90

Control

7365 11 / _

- _ / _ 1 DALI-2
- _ / _ 3 1-10V
- _ / _ Z Casambi

Select Electrical connection



Surface

Built-in
Disc S

Remote
Micro

Remote
XXS

- _10 Surface
- _24 Built-in Disc S
- _31 Remote Micro
- _32 Remote XXS

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 26,4 W 24V
 Constant voltage 24V
 90-305Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,070 m
 Vol 0,032 m³
 1 Box 0,12 x 0,12 x 0,48 m
 Vol 0,007 m³
 Gross weight 7,9 Kg Net weight 4,3 Kg

Notes

7365 _ / _ 1: DALI-2 **Multi-volt**
 7365 _ / _ 3: 1-10V **Multi-volt**

LED IP20 CE UK ENEC Dimmer

7366

Finishes

- 11/ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 6521 lm
- /2 _ 3000 K - 7022 lm
- /3 _ 3500 K - 7102 lm



CRI >90

Control

7366 11 / _

- _ / _ 1 DALI-2
- _ / _ 3 1-10V
- _ / _ Z Casambi

Select Electrical connection



Surface

Built-in
Disc S

Remote
Micro

Remote
XXS

- _10 Surface
- _24 Built-in Disc S
- _31 Remote Micro
- _32 Remote XXS

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 26,4 W 24V
 Constant voltage 24V
 90-305Vac 50/60Hz

Packaging


1 Tube 0,12 x 0,12 x 2,070 m
 Vol 0,032 m³
 1 Box 0,12 x 0,12 x 0,48 m
 Vol 0,007 m³
 Gross weight 7,9 Kg Net weight 4,3 Kg

Notes

7366 _ / _ 1: DALI-2 **Multi-volt**
 7366 _ / _ 3: 1-10V **Multi-volt**

LED IP20 CE UK ENEC Dimmer

7368
 7369
 UGR <19

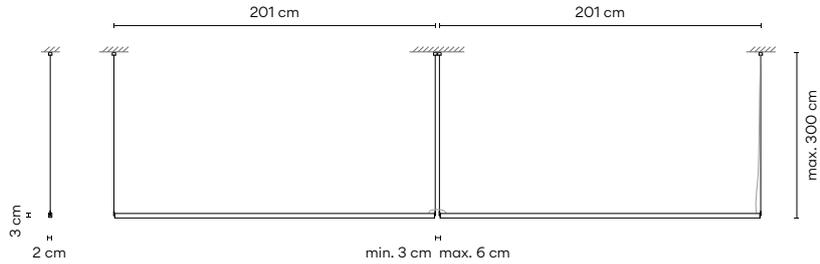

7368

Finishes

- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 8694 lm
- /2 _ 3000 K - 9363 lm
- /3 _ 3500 K - 9469 lm




CRI >90

Control

7368 11 / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ 3 1-10V
- _ _ / _ Z Casambi

Select Electrical connection

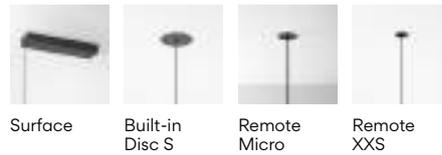

Surface Built-in Disc S Remote Micro Remote XXS

- _10 Surface
- _24 Built-in Disc S
- _31 Remote Micro
- _32 Remote XXS

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 35,2 24V
 Constant voltage 24V
 90-305Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25 m
 Vol 0,035 m³
 1 Box 0,12 x 0,12 x 0,48 m
 Vol 0,007 m³
 Gross weight 8,7 Kg Net weight 4,9 Kg

Notes

7368 _ _ / _ 3: 1-10V **Multi-volt**



7369

Finishes

- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 8694 lm
- /2 _ 3000 K - 9363 lm
- /3 _ 3500 K - 9469 lm



CRI >90

Control

7369 11 / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ 3 1-10V
- _ _ / _ Z Casambi

Select Electrical connection



Surface Built-in Disc S Remote Micro Remote XXS

- _10 Surface
- _24 Built-in Disc S
- _31 Remote Micro
- _32 Remote XXS

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 35,2 24V
 Constant voltage 24V
 90-305Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25 m
 Vol 0,035 m³
 1 Box 0,12 x 0,12 x 0,48 m
 Vol 0,007 m³
 Gross weight 8,7 Kg Net weight 4,9 Kg

Notes

7369 _ _ / _ 3: 1-10V **Multi-volt**



🔌 Select Electrical connection

For Ref. 7360, 7361, 7363, 7364, 7365, 7366, 7368, 7369

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Black finish.

_24
Built-in Disc S



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface




28 x 10 x 4 cm


Ref. 3768, 3769
40 x 10 x 4 cm

Black finish.

Remote



Built-in



Musa

Design by Note Design Studio

Delicate elegance.
It explores the delicacy of nature
which is both strong and powerful,
in a poetic expression of light.

Table Wall



7400
9 x Ø 26 cm



7402
Ø 26 x 14 x 10 cm



7404
Ø 26 x 14 x 10 cm



7415
Ø 26 x 10 cm

Portable

7400

Finishes

- 23/ __ Warm White (NCS S 0502-Y50R)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 36/ __ Soft Pink (NCS S 1010-Y50R)


Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1_ 2700 K - 449 lm
F →
CRI >90

Control

7400 __ / 15 Push
(with or without memory)



Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,3 Kg Net weight 0,85 Kg

Notes

Electric cable with plug 3m.
Push-button on the base.

LED IP20 Dimmer



7402


- Finishes**
- 23/ __ Warm White (NCS S 0502-Y50R)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 36/ __ Soft Pink (NCS S 1010-Y50R)

Finish customization
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
 /1 _ 2700 K - 449 lm

 CRI >90

Control
 7402 __ / 15 Push
 (with or without memory)



Materials

Diffuser: Blown glass.
 Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
 Constant Voltage 24V
 100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
 Vol 0,0163 m³
 Gross weight 1,3 Kg Net weight 0,85 Kg

Notes

Electric cable with plug 3m.
 Push-button on the base.



7404


- Finishes**
- 23/ __ Warm White (NCS S 0502-Y50R)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 36/ __ Soft Pink (NCS S 1010-Y50R)

Finish customization
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
 /1 _ 2700 K - 157 lm

 CRI >90

Control
 7404 __ / 15 Push
 (with or without memory)



Materials

Diffuser: Blown glass.
 Body: Aluminum.

Light Source and electronics

1 x LED 1,5 W 500 mA
 Constant Voltage 5V
 100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
 Vol 0,0163 m³
 Gross weight 1,4 Kg Net weight 0,95 Kg

Notes

Portable version with battery.
 Dimmer switch on the base. 3 step dimming.
 Electric cable with plug. 3 m.
 Push-button on the base.
 Battery life: from 6 to 18 hours
 (depending on intensity).



7415


- Finishes**
- 23/ __ Warm White (NCS S 0502-Y50R)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 36/ __ Soft Pink (NCS S 1010-Y50R)

Finish customization
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
 /1 _ 2700 K - 449 lm

 CRI >90

Control
 7415 __ / 13 1-10V



Materials


Diffuser: Blown glass.
 Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
 Constant Current 350 mA
 220~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
 Vol 0,0163 m³
 Gross weight 1,8 Kg Net weight 1,3 Kg



Knit

Design by Meike Harde

Form, materiality and tangibility collide with the Knit collection. Its texture is magnetic, calling out for us to touch its surface, to feel its warmth and to keep it close. Light seeps outwards through the fabric and downwards through a translucent screen, softening its luminosity.

Pendant




7450

Finishes
● 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E →
CRI >90

Control
7450 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi



Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.


Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110-240V 50/60Hz

Packaging
1 Box 0,55 x 0,55 x 0,65 m
Vol 0,196 m³
Gross weight 6 Kg Net weight 3,7 Kg

Notes
7450 _ _ / _ 1: DALI-2 **Bi-volt**
Extra cable length.

LED □ IP20 CE UK ENEC

7455



Finishes
 ● 24/ _ _ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
 /1 _ 2700 K - 4740 lm
 E
 CRI >90

Control
 7455 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

⚡ Select Electrical connection



_10 Surface
 _18 Free Wire
 _23 Built-in XS
 _31 Remote Micro
 _32 Remote XXS

Materials
 Fabric shade: PES FR.
 Interior diffuser: PE- Polyethylene.
 Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
 6 x LED 5,9W 350 mA
 Constant Current 1050 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,54 x 0,54 x 0,41 m
 Vol 0,119 m³
 Gross weight 5,9 Kg Net weight 3,2 Kg

Notes
 7455 _ _ / _ 1: DALI-2 **Bi-volt**
 Extra cable length.



7460



Finishes
 ● 24/ _ _ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
 /1 _ 2700 K - 4740 lm
 E
 CRI >90

Control
 7460 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

⚡ Select Electrical connection



_10 Surface
 _18 Free Wire
 _23 Built-in XS
 _31 Remote Micro
 _32 Remote XXS

Materials
 Fabric shade: PES FR.
 Interior diffuser: PE- Polyethylene.
 Diffuser: PMMA. Diffuser ring: ABS.


Light Source and electronics
 6 x LED 5,9W 350 mA
 Constant Current 1050 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,54 x 0,54 x 0,41 m
 Vol 0,119 m³
 Gross weight 5,2 Kg Net weight 3,4 Kg

Notes
 7460 _ _ / _ 1: DALI-2 **Bi-volt**
 Extra cable length.



7470



Finishes
● 24/ __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E →
CRI >90

Control
7470 __ / __
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ Z Casambi

⚡ Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.


Light Source and electronics
6 x LED 6,7W 400 mA
Constant Current 1200 mA
110-240V 50/60Hz

Packaging
1 Box 0,59 x 0,78 x 0,78m
Vol 0,358 m³
Gross weight 9 Kg Net weight 5,5 Kg

Notes
7470 __ / _ 1: DALI-2 **Bi-volt**
Extra cable length.



7475



Finishes
● 24/ __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E →
CRI >90

Control
7475 __ / __
__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ Z Casambi

⚡ Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 6,7W 400 mA
Constant Current 1200 mA
110-240V 50/60Hz

Packaging
1 Box 0,80 x 0,80 x 0,77m
Vol 0,492 m³
Gross weight 9,5 Kg Net weight 6 Kg

Notes
7475 __ / _ 1: DALI-2 **Bi-volt**
Extra cable length.



Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 7450, 7455, 7460, 7470, 7475

Drop ceiling

_31 Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32 Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

_23 Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10 Surface



Ø 16 cm

match with fixture finish.

_18 Free Wire



1 wire

Ø 22 cm



2-3 wires

Ø 36 cm




4 wires


Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in



Floor



7480
Ø 45 x 178 cm



7485
Ø 45 x 170 cm



7487
Ø 65 x 195 cm



7490
Ø 45 x 55 cm




7492
Ø 65 x 51 cm



7494
Ø 65 x 62 cm

7480



Finishes
● 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1_ 2700 K - 4740 lm
E
CRI >90

Control
7480 _ _ / _ _

_ _ / _ 5 Push
_ _ / _ Y ProtoPixel*
_ _ / _ Z Casambi

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.
Stem: Iron.
Floor base: Zinc Alloy.


Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43mA
110-240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,54 x 0,54 x 0,41 m
Box 2: 1,71 x 0,38 x 0,36 m
Total Vol. 0,4311 m³
Gross weight 21,9 Kg Net weight 11,3 Kg

Notes
7480 _ _ / _ 5: Push **Bi-volt**
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Electric cable 2,5 m.



7485



Finishes
● 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1_ 2700 K - 4740 lm
E
CRI >90

Control
7485 _ _ / _ _

_ _ / _ 5 Push
_ _ / _ Y ProtoPixel*
_ _ / _ Z Casambi

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.
Stem: Iron.
Floor base: Zinc Alloy.


Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43mA
110-240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,54 x 0,54 x 0,41 m
Box 2: 1,71 x 0,38 x 0,36 m
Total Vol. 0,353 m³
Gross weight 21,5 Kg Net weight 10,8 Kg

Notes
7485 _ _ / _ 5: Push **Bi-volt**
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Electric cable 2,5 m.



7487



Finishes
● 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1_ 2700 K - 4740 lm
E
CRI >90

Control
7487 _ _ / _ _

_ _ / _ 5 Push
_ _ / _ Y ProtoPixel*
_ _ / _ Z Casambi




Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.
Stem: Iron.
Floor base: Zinc Alloy.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43 mA
110-240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,78 x 0,78 x 0,59 m
Box 2: 1,93 x 0,45 x 0,46 m
Total Vol. 0,7649 m³
Gross weight 30 Kg Net weight 18,5 Kg

Notes
7487 _ _ / _ 5: Push **Bi-volt**
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Electric cable 2,5 m.



<p>7490</p>  <p>ø 45 cm 55 cm</p>	<p>Finishes</p> <p>● 24/ _ _ Beige M1 (NCS S 2005-Y50R)</p>	<p>LED Colour Temperature</p> <p>/1 _ 2700 K - 4740 lm</p> <p></p> <p>CRI >90</p>	<p>Control</p> <p>7490 _ _ / _ _</p> <hr/> <p>_ _ / _ 5 Push</p> <p>_ _ / _ Z Casambi</p> <hr/> <p>Packaging</p> <p>1 Box 0,65 x 0,55 x 0,55 m Vol 0,196 m³ Gross Weight 5,4 Kg Net Weight 3,3 Kg</p> <p>Notes</p> <p>7490 _ _ / _ 5: Push </p> <p>Push on the top of the luminaire. Electric cable 2,5 m</p> <p>     </p>
<p>7492</p>  <p>ø 65 cm 51 cm</p>	<p>Finishes</p> <p>● 24/ _ _ Beige M1 (NCS S 2005-Y50R)</p>	<p>LED Colour Temperature</p> <p>/1 _ 2700 K - 4740 lm</p> <p></p> <p>CRI >90</p>	<p>Control</p> <p>7492 _ _ / _ _</p> <hr/> <p>_ _ / _ 5 Push</p> <p>_ _ / _ Z Casambi</p> <hr/> <p>Packaging</p> <p>1 Box 0,78 x 0,78 x 0,59 m Vol 0,358 m³ Gross Weight 7,3 Kg Net Weight 4,5 Kg</p> <p>Notes</p> <p>7492 _ _ / _ 5: Push </p> <p>Push on the top of the luminaire. Electric cable 2,5 m</p> <p>     </p>
<p>7494</p>  <p>ø 65 cm 62 cm</p>	<p>Finishes</p> <p>● 24/ _ _ Beige M1 (NCS S 2005-Y50R)</p>	<p>LED Colour Temperature</p> <p>/1 _ 2700 K - 4740 lm</p> <p></p> <p>CRI >90</p>	<p>Control</p> <p>7494 _ _ / _ _</p> <hr/> <p>_ _ / _ 5 Push</p> <p>_ _ / _ Z Casambi</p> <hr/> <p>Packaging</p> <p>1 Box 0,80 x 0,80 x 0,75 m Vol 0,48 m³ Gross Weight 9,3 Kg Net Weight 5,9 Kg</p> <p>Notes</p> <p>7494 _ _ / _ 5: Push </p> <p>Push on the top of the luminaire. Electric cable 2,5 m.</p> <p>     </p>



Set

Design by Xuclà

Set is a new concept of modular wall sconces that composes light as art onto the walls. During the day Set decorates the wall with a pattern of rectangular elements, but once illuminated it creates a surprising play of lights, shadows and volumes.

Wall



7749

18 x 10 cm

7750

18 x 10 cm

7751

30 x 10 cm


7752

30 x 10 cm

7753

38 x 10 cm

7749



Finishes

- **25/** __ Beige D1 (NCS S 4005-Y50R)
- **93/** __ White (RAL 9003)

LED Colour Temperature

- /1** _ 2700 K - 1269 lm
 - /3** _ 3500 K - 1374,9 lm
- CRI >90

Control

7749 __ / __ **2** 0-10V

Materials

Main body: Aluminum.
Diffuser: Borosilicate glass.
Lid: PC- Polycarbonate.

Light Source and electronics


1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,67 Kg Net weight 0,52 Kg

LED IP20 Multi-volt

7750



Finishes

- **25/** __ Beige D1 (NCS S 4005-Y50R)
- **93/** __ White (RAL 9003)

LED Colour Temperature

- /1** _ 2700 K - 1269 lm
 - /3** _ 3500 K - 1374,9 lm
- CRI >90

Control

7750 __ / __ **2** 0-10V

Materials

Main body: Aluminum.
Diffuser: Borosilicate glass.
Reflecting bodies: PVC.
Lid: PC- Polycarbonate.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 0,95 Kg Net weight 0,8 Kg


Notes

LED placed on the lower element.

LED IP20

Bi-volt Multi-volt

7751



- Finishes**
- 25/ __ Beige D1 (NCS S 4005-Y50R)
 - 93/ __ White (RAL 9003)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
 [D] >

/3 _ 3500 K - 1374,9 lm
 [G] >

CRI >90

Control

7751 __ / _ 2 0-10V

Materials

Main body: Aluminum.
 Diffuser: Borosilicate glass.
 Reflecting bodies: PVC.
 Lid: PC- Polycarbonate.

Light Source and electronics

1 x LED 9 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging


1 Box 0,15 x 0,132 x 0,36 m
 Vol 0,0071 m³
 Gross weight 1,25 Kg Net weight 1,1 Kg

Notes

LED placed on the lower element.

[LED] [IP20] [CE] [UK] [EAC] [EBC] [Multi-volt]

7752



- Finishes**
- 25/ __ Beige D1 (NCS S 4005-Y50R)
 - 93/ __ White (RAL 9003)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
 [D] >

/3 _ 3500 K - 1374,9 lm
 [G] >

CRI >90

Control

7752 __ / _ 2 0-10V

Materials

Main body: Aluminum.
 Diffuser: Borosilicate glass.
 Reflecting bodies: PVC.
 Lid: PC- Polycarbonate.

Light Source and electronics

1 x LED 9 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging


1 Box 0,15 x 0,132 x 0,36 m
 Vol 0,0071 m³
 Gross weight 1,6 Kg Net weight 1,4 Kg

Notes

LED placed on the lower element.

[LED] [IP20] [CE] [UK] [EAC] [EBC] [Multi-volt]

7753



- Finishes**
- 25/ __ Beige D1 (NCS S 4005-Y50R)
 - 93/ __ White (RAL 9003)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
 [D] >

/3 _ 3500 K - 1374,9 lm
 [G] >

CRI >90

Control

7753 __ / _ 2 0-10V

Materials

Main body: Aluminum.
 Diffuser: Borosilicate glass.
 Reflecting bodies: PVC.
 Lid: PC- Polycarbonate.

Light Source and electronics

1 x LED 9 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging

1 Box 0,15 x 0,193 x 0,36 m
 Vol 0,0100 m³
 Gross weight 2 Kg Net weight 1,5 Kg

Notes

LED placed on the lower element.

[LED] [IP20] [CE] [UK] [EAC] [EBC] [Multi-volt]

Alpha

Design by Ramos & Bassols

A wall lamp with basic lines and advanced lighting performance, its diffuser emits a warm, comfortable light.

Wall



7940

12 x 12 cm



Without switch

7942

12 x 12 cm

7940

Finishes


- **18/** Graphite & Black (RAL 7016 & RAL 9005)
- **93/** White (RAL 9016)

LED Colour Temperature

- /1** 2700 K - 181,22 lm
 - /3** 3500 K - 163,20 lm
- CRI >90

Control

7940 _ _ / _ 0 On/ Off



Materials

Diffuser: PC- Polycarbonate.
Lid: Zinc Alloy.
Body: Aluminum.
Lid: Aluminum.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m³
Gross weight 1,2 Kg Net weight 1 Kg

Notes

Surface

On/ Off switch on the front cover

LED IP20 CE ENEC EAC Bi-volt



7942

- Finishes**
- **18/** _ _ Graphite & Black (RAL 7016 & RAL 9005)
 - **93/** _ _ White (RAL 9016)

LED Colour Temperature


/1 _ 2700 K - 181,22 lm

/3 _ 3500 K - 163,20 lm

CRI >90

Control

7942 _ _ / _ 0 On/ Off



Materials

Diffuser: PC- Polycarbonate.
 Lid: Zinc Alloy.
 Body: Aluminum.
 Lid: Aluminum.

Light Source and electronics

1 x LED 2,1 W 700 mA
 Constant Current 700 mA
 100-240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m
 Vol 0,0055 m³
 Gross weight 1,2 Kg Net weight 1 Kg

Notes

Surface
 Without switch

LED IP20 CE ENEC Bi-volt

Match

Design by Jordi Vilardell & Meritxell Vidal

Based on the principle of co-creation, Match is a lighting collection that can be fully customised virtually. Characterised by unlimited configurations, Match's kinetic clusters exude a textured, sculptural presence.









Built-in installation

- Electrical connection finials: the minimum height is 10 cm and the dimension of the cut-out is 10,5 cm.
- Nodes: the minimum height is 12 cm and the dimension of the cut-out is 4,5 cm.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Match composition quick and easy at vibia.com

It's necessary to make your personalized configuration on vibia.com to see prices and place orders.

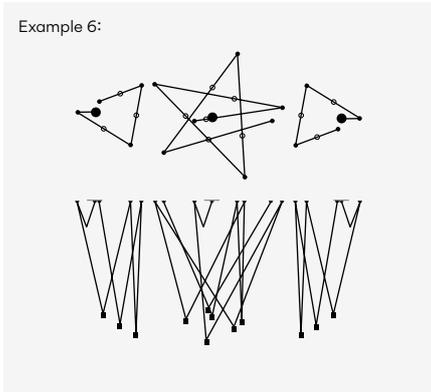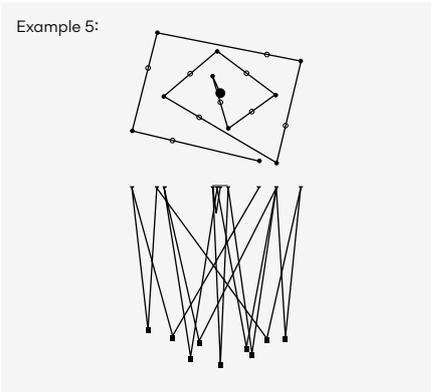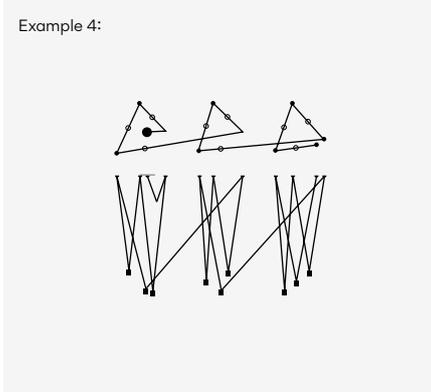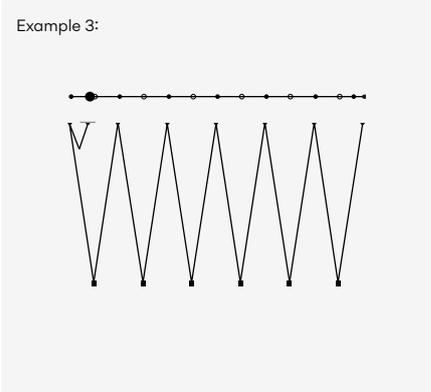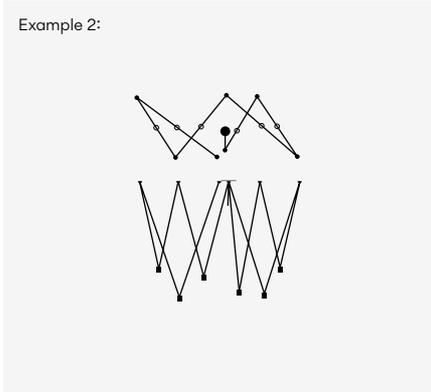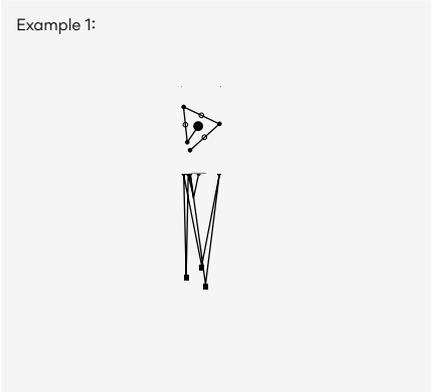

- Finishes**
- 03/ __ White (RAL 9010)
 - 18/ __ Graphite (RAL 7016)

- LED Colour Temperature**
- /1_ 2700 K - 1269 lm
 - CRI >90
 - /2_ 3000 K - 1269 lm
 - CRI >80
 - /3_ 3500 K - 1446 lm
 - CRI >90

- Control**
-
- / A Push; 1-10V- DALI-2
 - / Z Casambi

Materials
 Head: Aluminum.
 Canopy: Steel.
 Rods: Steel.

Light Source and electronics
 LED 2,1 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Notes
 Built-in
 LED IP20 CE ENEC EAC Bi-volt
 Ø 4,5 cm Ø 10,5 cm

PLACE ORDER ONLINE AT WWW.VIBIA.COM



Light source

Luminaire data

The information published in this technical catalog (lumens & watts) refers to the light source. Check luminaire data in the downloadable spec sheet at vibia.com

LED retrofit			
900018.	LED G9 4,2W 2700K 470 lm.		Puck and Warm
900102.	LED E27 230V 12W LED 2700 K 1520 lm		Balance and Warm

Bulbs: net prices, without discount

Glossary

CE

Product fulfills the requirements of the relevant European directives.

UK

Product fulfills the requirements of Great Britain relevant legislation.

EU

Product complying with TP TC 004/2011 and TP TC 020/2011. Custom Union Regulation

☞

Product that complies with the law N24-09 of the current Moroccan legislation.

IP

Level of protection. Electrical products are prepared to avoid solids and liquids from getting in contact with the electrical parts. Such resistance is expressed as IP followed by two digits: the first digit indicates the level of resistance to solid objects and the second one to liquids. The scale goes from IP20 to IP69.

IP20

Product protected against solid object as big as or bigger than 12 mm. No protection against water.

↑ IP20 ↓ IP40

Product protected against solid objects as big as or bigger than 12 mm in the built-in part. In the visible part of the luminaire, product protected against solid objects as big as or bigger than 1 mm. No protection against water.

IP64

Dust-tight product. Protected against water spray.

IP65

Dust-tight product. Protected against water trickles.

IP66

Dust-tight product. Protected against water spurts.

Insulation class



Class I. Product with an additional protection cable (grounds).



Class II. Product protected against electric shock having a double insulation. No grounds.



Class III. Product protected against electric shock based on a very-low voltage system. No grounds.

Bi-volt

Valid for the range 110V-230V, 50-60Hz.

Multi-volt

Valid for the range 110-277V, 50-60Hz.

Cut out



Property for embedding dimension.

Integrated Dimmer

Dimmer

Lamp that has a integrated dimmer.

EU Energetic label

More Efficacy



Less Efficacy

Light source information

CRI

Colour rendering index.

K

LED Colour Temperature.

lm


Lumen, unit of measurement of luminous flux.

lm/W


Light source performance. Relationship between the luminous flux (lm) and the power consumed (W) by the source.

Lighting control systems


1 Push control

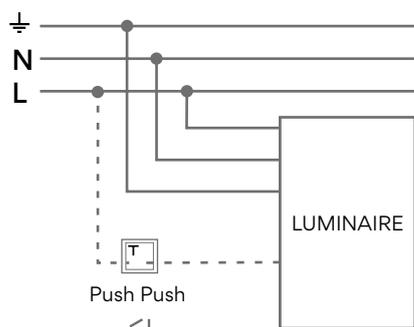


2 1-10V System control

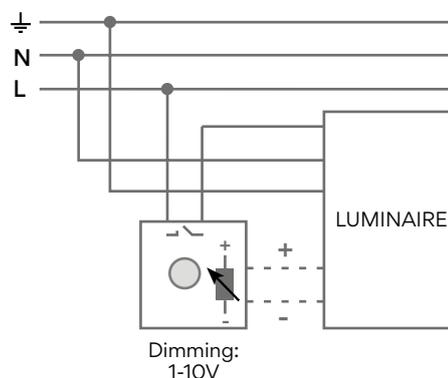


3 DALI System control

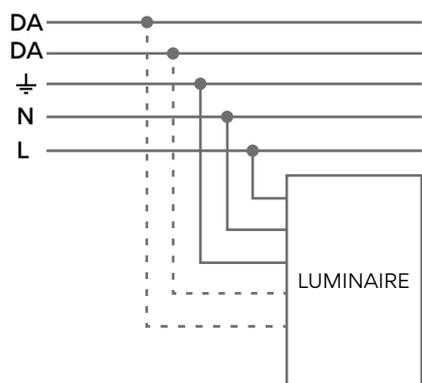


4 Casambi control

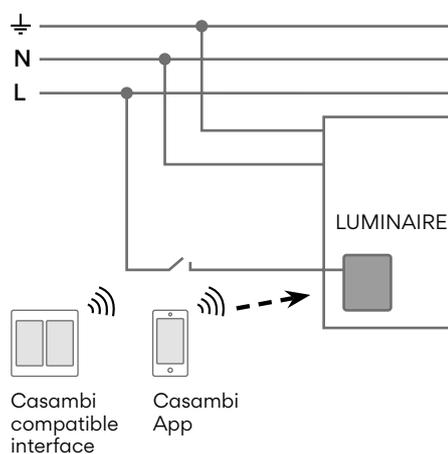

5 ProtoPixel control

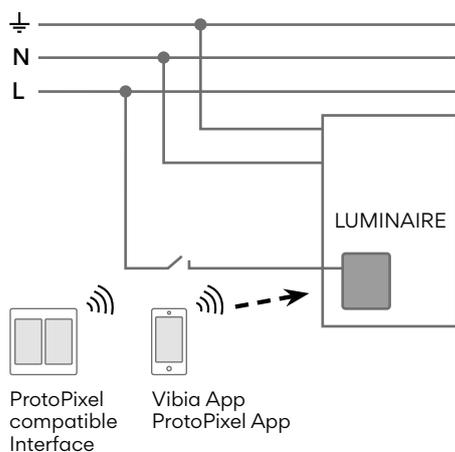

6 TRIAC control

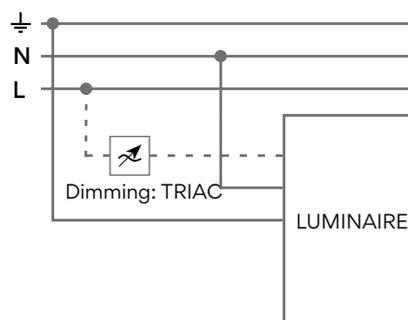

⊥	Ground	L	Line
N	Neutral	DA	DALI-Digital Signal

Very important

Vibia Lighting S.L.U. has the right to change any model or finish of the products included in the picture catalogue without any previous notice.

Vibia Lighting, S.L.U.

Office

Progrés 4-6.

08850 Gavà (Barcelona).

International Tel +34 934 796 971.

customer.service@vibia.com

vibia.com

COPYRIGHT© VIBIA LIGHTING S.L.U. ALL RIGHTS RESERVED.

